




Project:	
Type:	
Description:	

**YORI EVO 48V 1.4" INDOOR - TRACK**

**48V TRACK**

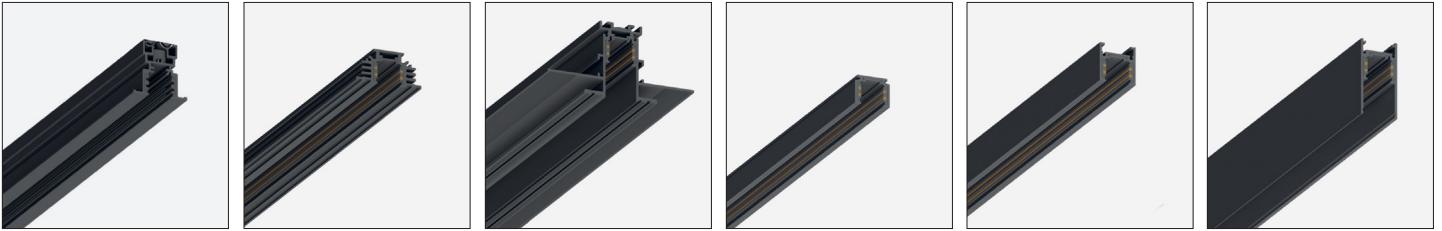

48V Recessed Trim    48V Recessed Trimless    48V High Recessed Trimless    48V Surface Slim    48V Surface/Pendant    48V High Surface/Pendant

**48V - TRACK DOWNLIGHT ONLY**

Example:

**A.50428.0012.LVXXXX**

**A.504**            **.LV**    **XXXX**

Track	Type	Finishes	Low Voltage	Length
<b>A.504</b> 48V	<b>28</b> High Surface	<b>0012</b> White	<b>.LV</b> Low Voltage	<b>XXXX</b> Exact length (in Inches)
	<b>29*</b> High Pendant	<b>0031</b> Black		
	<b>32</b> Recessed Trimless			
	<b>35</b> High Recessed Trimless			
	<b>39</b> Surface			
	<b>40*</b> Pendant			
	<b>43*</b> Recessed Trim			
	<b>45*</b> Surface Slim			

NOTES  
 4. For pendant versions, must specify cable or rigid stem pendant accessories on last page.  
 8. Longer lead time consult factory

**48V - TRACK DOWNLIGHT AND UPLIGHT**

Example:

**V.5373C.HW12.48XXXX**

   **.537**        **C**            **.48**    **XXXX**

Dimming	Track	Type/Uplight Circuit	Uplight	CCT	4.2 W/LF	Finishes	Low Voltage	Length
<b>V</b> 0-10V	<b>.537</b> 48V Uplight	<b>3</b> Pendant, Single Circuit for Down/Up	<b>C*</b> Continuous	<b>HW</b> 2700K CRI>90	Im 548/LF	<b>12</b> White	<b>.48</b> 48V	<b>XXXX</b> Exact length (in Inches)
<b>D</b> DALI		<b>4</b> Pendant, Separate Circuits for Down/Up		<b>HQ</b> 3000K CRI>90	Im 663/LF	<b>31</b> Black		
<b>0</b> On/Off		<b>7</b> High Pendant, Single Circuit for Down/Up		<b>WQ<sup>2</sup></b> 3500K CRI>90	Im 690/LF			
		<b>8</b> High Pendant, Separate Circuits for Down/Up		<b>HN</b> 4000K CRI>90	Im 717/LF			

NOTES  
 2. For 3500K CCT, must consult with factory to confirm availability  
 5. Standard linear LED uplight runs continuously in track. Consult factory for optional 2' linear uplight installed in segments spaced in 1' increments on center.

**DRIVER**

Example:

**0.FHM57.0000.48**

Control	Driver Location	Driver Code	Plate	Low Voltage
<b>0</b> On/Off*	<b>F</b> Remote Driver	120/277V; On/Off driver to power track and LED uplight	<b>0000</b> No Plate	<b>.48</b> 48V
		60W <b>MM54</b>		
		120/277V; On/Off driver to power track and LED uplight		
		96W <b>HM57</b>		
		120/277V; On/Off driver to power track and LED uplight		
		320W <b>WM61</b>		

NOTES  
 6. Remote drivers to power track and uplight are on/off. All dimming drivers are located on-board track heads and uplights. For higher power drivers, consult factory for available options.  
 7. Total quantity of remote drivers is based on load requirements to be determined by track row and run lengths and quantity of track heads and uplights.

Project:	
Type:	
Description:	

## YORI EVO 48V 1.4"

INDOOR - TRACK

### Technical Info

#### Driver:

Remote driver is required to power the 48V track.

#### Optical features Light source features:

1 LED/3step/50,000 hrs

#### Beam angles:

Precision: 10°, 22°, 31°

#### Physical features:

**Material:** Die-cast aluminum

**Mounting:** Track

**Adjustability:** 356° horizontal axis 90° vertical axis

**Weight:** 0.3 lbs/0.6 lbs

#### Max Remote Driver Distance:

60 Ft, 18 Ga

80 Ft, 16 Ga

100 Ft, 14 Ga

#### Luminaire Description:

**Fixture Features:** 48V low-voltage Yori Evo track system allows for minimal track profiles and clean aesthetic with no driver box on the track head.

**Fixture Benefits:** Part of the Yori family of lights assures consistent design.

**Track:** 48V recessed, surface, pendant.

**Track Accessories:** Please see following pages.

**Warranty:** 5 Year LED.

**Track Head Accessories:** Wide range of Precision accessories available.

#### ETL listed, Union assembled


Reggiani reserves the right to change details at any time.

Rev 8/10/2021


### Technical Drawings

#### TRACK HEADS


On/Off Standard Arm




On/Off Long Arm




0-10V/DALI Standard Arm




0-10V/DALI Long Arm



Standard Arm 2x



Long Arm 2x




#### NOTE


Long arm is required for high recessed trimless and high surface/pendant track. Standard arm is recommended for all other tracks.

#### 48V TRACK


48V Recessed Trim




48V Recessed Trimless




48V High Recessed Trimless




48V Surface Slim



48V Surface/Pendant



48V High Surface/Pendant




Project:	
Type:	
Description:	

## YORI EVO 48V 1.4"

INDOOR - TRACK

### DRIVER


#### Medium Remote Box



**FOR USE WITH: MM54 60W Driver**

1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation


#### Slim Remote Box



**FOR USE WITH: HM57 96W Driver**

1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation

#### Extra Large Remote Box



**FOR USE WITH: WM61 320W Driver**











1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation

Project:	
Type:	
Description:	

YORI EVO 48V 1.4"

INDOOR - TRACK

## ACCESSORIES PRECISION


	<b>Description:</b> Glass filter 1 mm	<b>Code:</b> 0.26710.00__	<b>Finishes:</b> 4A RED 5A Green 6A Blue 7A Pink 8A Yellow 9A orange
	<b>Description:</b> Selective filter 3000K - 2700K	<b>Code:</b> 0.26711.0000	
	<b>Description:</b> Selective filter 2700K - 2500K	<b>Code:</b> 0.26712.0000	
	<b>Description:</b> Selective filter 2700K - 2200K	<b>Code:</b> 0.26713.0000	
	<b>Description:</b> Selective filter 2700K - 2000K	<b>Code:</b> 0.26714.0000	
	<b>Description:</b> Selective filter 3000K - 3600K	<b>Code:</b> 0.26715.0000	
	<b>Description:</b> Selective filter 3000K - 4000K	<b>Code:</b> 0.26716.0000	
	<b>Description:</b> Elliptical beam lens	<b>Code:</b> 0.26717.0000	
	<b>Description:</b> Opal lens	<b>Code:</b> 0.26718.0000	
	<b>Description:</b> Spread lens	<b>Code:</b> 0.26719.0000	

Project:	
Type:	
Description:	

## YORI EVO 48V 1.4"

INDOOR - TRACK

### 48V TRACK ACCESSORIES

CONNECTOR ACCESSORIES			
	<b>Description:</b> L-Connector for Recessed Trim	<b>Code:</b> <b>0.02414.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for Recessed Trimless	<b>Code:</b> <b>0.02474.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for High Recessed Trimless	<b>Code:</b> <b>0.02478.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for Surface/Pendant	<b>Code:</b> <b>0.02449.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for High Surface/Pendant	<b>Code:</b> <b>0.02448.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
PENDANT ACCESSORIES			
	<b>Description:</b> 9' Long Cable Suspension Set, With Power, End of Row (Quantity provided will be based on row/run information)	<b>Code:</b> <b>A.LVEP1.00__C118</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> 9' Long Cable Suspension Set, Non-Power, End of Row (Quantity provided will be based on row/run information)	<b>Code:</b> <b>A.LVEN1.00__C118</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> 9' Long Cable Suspension Set, With Power, Middle of Row (Quantity provided will be based on row/run information)	<b>Code:</b> <b>A.LVMP1.00__C118</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black






Project:	
Type:	
Description:	

## YORI EVO 48V 1.4"

INDOOR - TRACK

### 48V TRACK ACCESSORIES

#### PENDANT ACCESSORIES

	<p><b>Description:</b> 9' Long Cable Suspension Set, Non-Power, Middle of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVMN1.00__C118</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, With Power, End of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVEP2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, Non-Power, End of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVEN2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, With Power, Middle of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVMP2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, Non-Power, Middle of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVMN2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>