


Mood

- Mood Adjustable
- Mood Fixed
- Mood Wall Washer

Combining style and substance, our invisible recessed downlights are ideal for any architectural space.




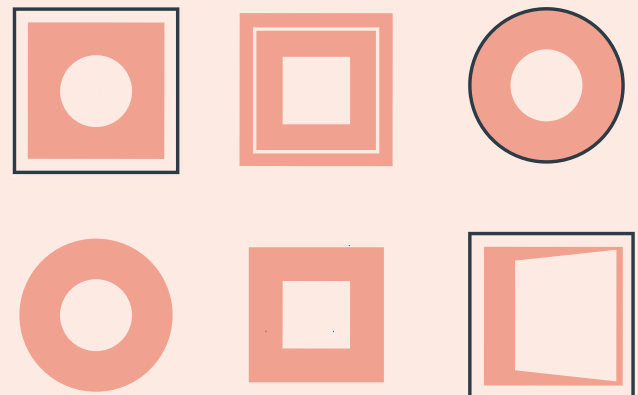

Mood Adjustable

Our adjustable product creates brilliant accent lighting for different environments. The lighting output and aesthetics are of a high standard, featuring multiple optics and a full range of accessories. They are available in various sizes: S, M, L, XL.

IP: dry location IP20 (damp location IP44 with accessory)

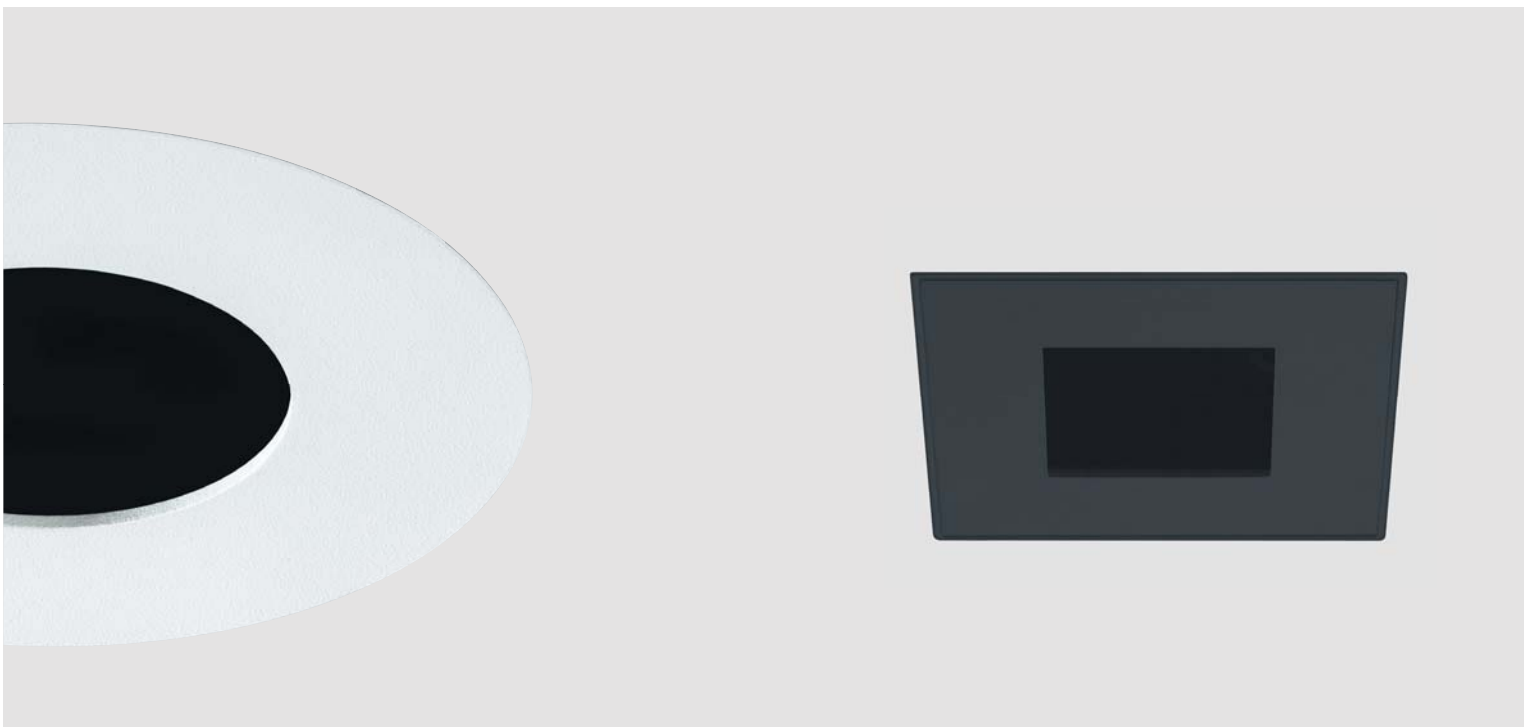

Standard Finishes:



Embossed
matt white

12



Embossed
matt black

31

Onrequest:

- Chrome
- Gold
- Silver
- Copper
- Royal matt white
- Royal matt black
- Primer



Plate shapes:

*Available for:
M,L,XL versions



Round
Flush



*Round
Cone



*Round
Curve
(accessory)



Square
Flush



*Square
Pyramid



*Square
Curve
(accessory)

Shapes:



Round
Trim



Round
Trimless



Square
Trim



Square
Trimless

Optics:



Narrow



Medium




Wide




Very Wide

Adjustability:



Horizontal
axis

358°



Vertical
axis

0° 35°/40°

35°: S, XL versions
40°: M, L versions

Optic Accessories:



Honeycomb



Holder for colored
and selective filters

Plate accessories:



IP44
Glass



IP44
Elliptical
glass



IP44
Diffusive
lens



IP44
Opal
lens



IP44
Wall washer*
lens

*Available for:
M,L,XL versions

Technical features:

	Round trim	Trimless	
S			<p>3.5W Initial: 315-375lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off, 0-10V Dimming, Phase-cut</p>
M			<p>8.5W Initial: 725-875lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off, 0-10V Dimming, Phase-cut</p>
L			<p>12W, 17W Initial: 1320-2265lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off, 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 13W, Initial: 100-1000lm, 2000K - 3000K, CRI >95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 16W, Initial: 1000lm 2700K, 3000K, 4000K / SDCM <2 CRI >95 On/Off, 0-10V Dimming, Phase-cut</p>
XL			<p>24W, 33W Initial: 1800-4150lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off, 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 34W, Initial: 200-2850lm, 2000K - 3000K, CRI >95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 22W, Initial: 2000lm 34W, Initial: 3000lm 2700K, 3000K, 4000K / SDCM <2 CRI >95 On/Off, 0-10V Dimming, Phase-cut</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.
 - Dimensions are nominal.
 - For other color temperatures, please consult factory.
 - See spec sheets for housing & dimming options.

Technical features:

	Square trim	Trimless	
S			<p>3.5W Initial: 315-375lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p>
M			<p>8.5W Initial: 725-875lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p>
L			<p>12W, 17W Initial: 1320-2265lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 13W, Initial: 100-1000lm, 2000K - 3000K, CRI > 95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 16W, Initial: 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off 0-10V Dimming, Phase-cut</p>
XL			<p>24W, 33W Initial: 1800-4150lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 34W, Initial: 200-2850lm, 2000K - 3000K, CRI > 95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 22W, Initial: 2000lm 34W, Initial: 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off 0-10V Dimming, Phase-cut</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.
 - Dimensions are nominal.
 - For other color temperatures, please consult factory.
 - See spec sheets for housing & dimming options.

Sizes:

S

M

L


XL



ø2"



ø3"



ø4.25"



ø6"




2"x2"



3"x3"




4.25"x4.25"




6"x6"

Adjustability:




Horizontal axis
(358°)



Vertical axis
35°: S, XL versions
40°: M, L versions



Different shapes, trims and finishes

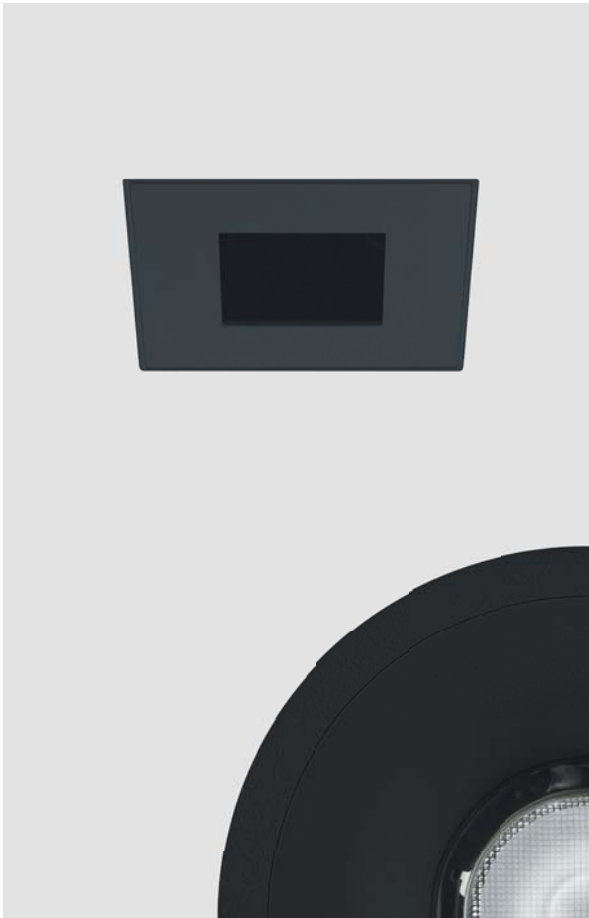

Newly designed optics for very narrow, medium and wide beam angles



Easy lock and adjustability system, no tools required

Adjustable graduated scale

Mood Fixed

Our wide range of fixed Mood comes in five sizes, from 1.25 inches to 6 inches. The opal diffuser makes the light soft, and the reflectors can change the beam angles, providing flexibility. The Mood is ideal for all architectural applications and IP44 certification provides durability and protection.

IP: damp location IP44



Finishes:



Embossed
matt white

12



Embossed
matt black

31



Embossed
matt black/Gold






T7



Embossed
matt white/Copper

T9

On request:

- Chrome 
- Gold 
- Silver 
- Copper 
- Royal matt white 
- Royal matt black 
- Primer 

Shapes:



Round
Trim



Round
Trimless



Square
Trim



Square
Trimless

Optics:



Narrow



Medium



Wide



Very Wide

Alternate Versions:



Hollow
dome



Hollow
cylinder

Technical features:

	Round trim	Trimless	
XS	<p>2" ø1.25" ø1.4"</p>	<p>2" ø1.25" ø1.4"</p>	<p>2.5W Initial: 155-191lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p>
S	<p>3.25" ø2" ø2.28"</p>	<p>3.25" ø2" ø2.28"</p>	<p>3.5W Initial: 315-375lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p>
M	<p>4.75" ø3.25" ø3.6"</p>	<p>4.75" ø3.25" ø3.6"</p>	<p>8.5W Initial: 725-875lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p>
L	<p>5.25" ø4.25" ø4.7"</p>	<p>5.25" ø4.75" ø4.7"</p>	<p>12W, 17W Initial: 1320-2265lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 13W, Initial: 100-1000lm, 2000K-3000K, CRI > 95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 16W, Initial: 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off 0-10V Dimming, Phase-cut</p>
XL	<p>7" ø6" ø6.6"</p>	<p>7" ø6" ø6.6"</p>	<p>24W, 33W Initial: 1800-4150lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 34W, Initial: 200-2850lm, 2000K-3000K, CRI > 95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 22W, Initial: 2000lm 34W, Initial: 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off 0-10V Dimming, Phase-cut</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.
 - Dimensions are nominal.
 - For other color temperatures, please consult factory.
 - See spec sheets for housing & dimming options.

Technical features:

	Square trim	Trimless	
XS			<p>2,5W Initial: 155-191lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off 0-10V Dimming, Phase-cut</p>
S			<p>3,5W Initial: 315-375lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off 0-10V Dimming, Phase-cut</p>
M			<p>8,5W Initial: 725-875lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off 0-10V Dimming, Phase-cut</p>
L			<p>12W, 17W Initial: 1320-2265lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 13W, Initial: 100-1000lm, 2000K-3000K, CRI >95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 16W, Initial: 1000lm 2700K, 3000K, 4000K / SDCM <2 CRI >95 On/Off 0-10V Dimming, Phase-cut</p>
XL			<p>24W, 33W Initial: 1800-4150lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 34W, Initial: 200-2850lm, 2000K-3000K, CRI >95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 22W, Initial: 2000lm 34W, Initial: 3000lm 2700K, 3000K, 4000K / SDCM <2 CRI >95 On/Off 0-10V Dimming, Phase-cut</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.
 - Dimensions are nominal.
 - For other color temperatures, please consult factory.
 - See spec sheets for housing & dimming options.

Sizes:

XS

S

M

L

XL



ø1.25"

ø2"

ø3"

ø4.25"

ø6"



1.25"x1.25"

2"x2"

3"x3"

4.25"x4.25"

6"x6"

Accessories:



Hollow dome



Hollow cylinder


High performance compact heat sink



Recessed LED source for excellent visual comfort



High quality of finishes and minimalist design

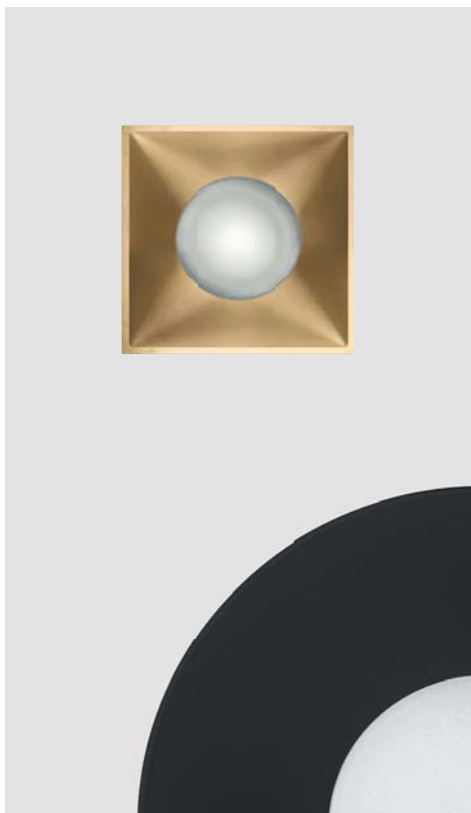

Silicone gasket for IP44 protection

Diffusive dome for soft light effect

Mood Wall Washer

Our ultimate solution for wall wash illumination is available in both circular and square shapes. We offer four sizes of minimalist recessed downlights, scaling from two to six inches and two different types of flush and drop lenses.

IP: damp location IP44



Standard Finishes:



Embossed
matt white

12



Embossed
matt black

31

On request:

- Chrome
- Gold
- Silver
- Copper
- Royal matt white
- Royal matt black
- Primer



Plate shapes:



Round
Flush



Round
Drop



Square
Flush



Square
Drop



Round flush
Elliptical lens
(accessory)



Round drop
Elliptical lens
(accessory)



Square flush
Elliptical lens
(accessory)



Square drop
Elliptical lens
(accessory)

Shapes:



Round
Trim



Round
Trimless



Square
Trim



Square
Trimless

Optics:




Wall
washer*


*Different distributions available in accordance to primary and secondary optics selection.

Adjustability:


Steps




1



2



3



4









3 steps: S,M,L versions
4 steps: XL Version

Technical features:

	Round trim	Trimless	
S			<p>3.5W Initial: 315-375lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p>
M			<p>8.5W Initial: 725-875lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p>
L			<p>12W, 17W Initial: 1320-2265lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 13W, Initial: 100-1000lm, 2000K-3000K, CRI > 95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 16W, Initial: 1000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off 0-10V Dimming, Phase-cut</p>
XL			<p>24W, 33W Initial: 1800-4150lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM < 3 CRI > 80, CRI > 90 On/Off 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 34W, Initial: 200-2850lm, 2000K-3000K, CRI > 95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 22W, Initial: 2000lm 34W, Initial: 3000lm 2700K, 3000K, 4000K / SDCM < 2 CRI > 95 On/Off 0-10V Dimming, Phase-cut</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.
 - Dimensions are nominal.
 - For other color temperatures, please consult factory.
 - See spec sheets for housing & dimming options.

Technical features:

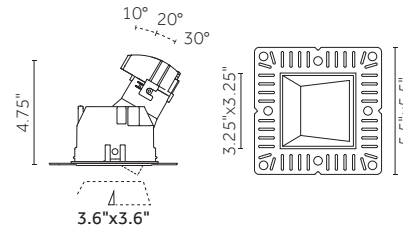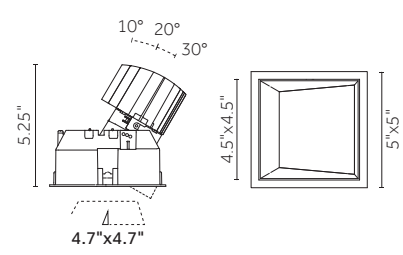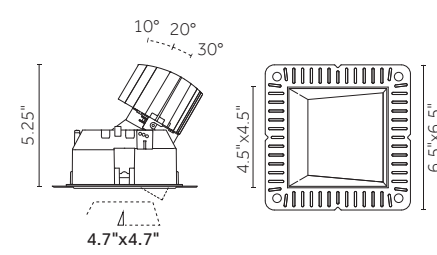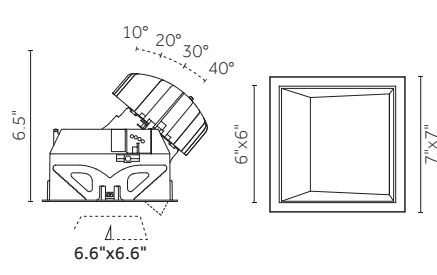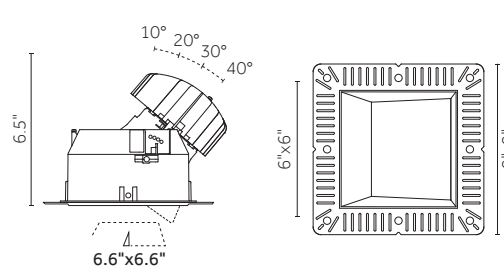	Square trim	Trimless	
S	 <p>10° 20° 30° 2.75" 2.28"x2.28"</p>	 <p>10° 20° 30° 2.75" 2.28"x2.28"</p>	<p>3.5W Initial: 315-375lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off 0-10V Dimming, Phase-cut</p>
M	 <p>10° 20° 30° 4.75" 3.6"x3.6"</p>	 <p>10° 20° 30° 4.75" 3.6"x3.6"</p>	<p>8.5W Initial: 725-875lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off 0-10V Dimming, Phase-cut</p>
L	 <p>10° 20° 30° 5.25" 4.7"x4.7"</p>	 <p>10° 20° 30° 5.25" 4.7"x4.7"</p>	<p>12W, 17W Initial: 1320-2265lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 13W, Initial: 100-1000lm, 2000K-3000K, CRI >95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 16W, Initial: 1000lm 2700K, 3000K, 4000K / SDCM <2 CRI >95 On/Off 0-10V Dimming, Phase-cut</p>
XL	 <p>10° 20° 30° 40° 6.5" 6.6"x6.6"</p>	 <p>10° 20° 30° 40° 6.5" 6.6"x6.6"</p>	<p>24W, 33W Initial: 1800-4150lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM <3 CRI >80, CRI >90 On/Off 0-10V Dimming, Phase-cut</p> <p>Warm Dimming: 34W, Initial: 200-2850lm, 2000K-3000K, CRI >95 0-10V Dimming, Phase-cut</p> <p>Phosphor LED Module: 22W, Initial: 2000lm 34W, Initial: 3000lm 2700K, 3000K, 4000K / SDCM <2 CRI >95 On/Off 0-10V Dimming, Phase-cut</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.
 - Dimensions are nominal.
 - For other color temperatures, please consult factory.
 - See spec sheets for housing & dimming options.

Sizes:

S

M

L

XL



ø2"



ø3"



ø4.25"



ø6"



2"x2"



3"x3"




4.25"x4.25"



6"x6"

Adjustability:



3 steps: S,M,L versions
4 steps: XL version (40°)



1



2



3



4

High performance diffuser



Minimalist design

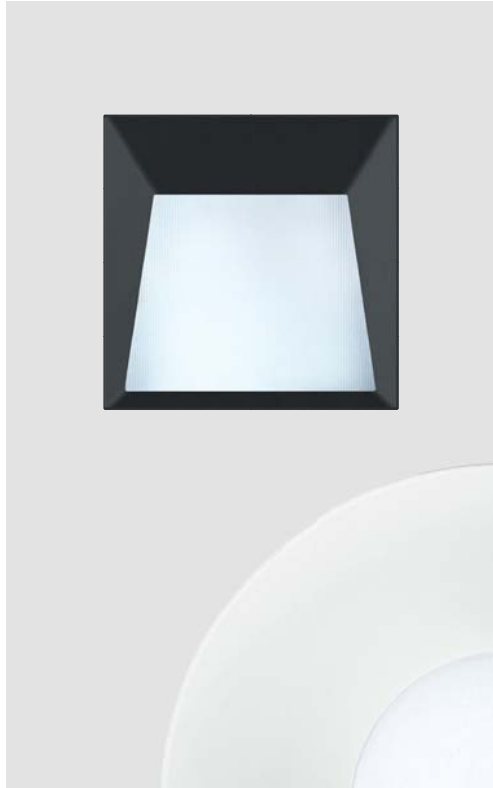


Plate version: drop



Plate version: flush