


# Change the mood

## Mood





**Reggiani**  
NORTH AMERICA



# Mood

- **Mood Adjustable**
- **Mood Fixed**
- **Mood Wall Washer**


Combining style and substance, our invisible architectural recessed downlights are ideal for illuminating high-end interiors.



# Mood Adjustable

Our adjustable product creates brilliant accent lighting for different environments. The lighting output and aesthetics are of a high standard, featuring multiple optics and a full range of accessories. They are available in various sizes: S, M, L, XL.

**IP:** 20 (IP44 with accessory)

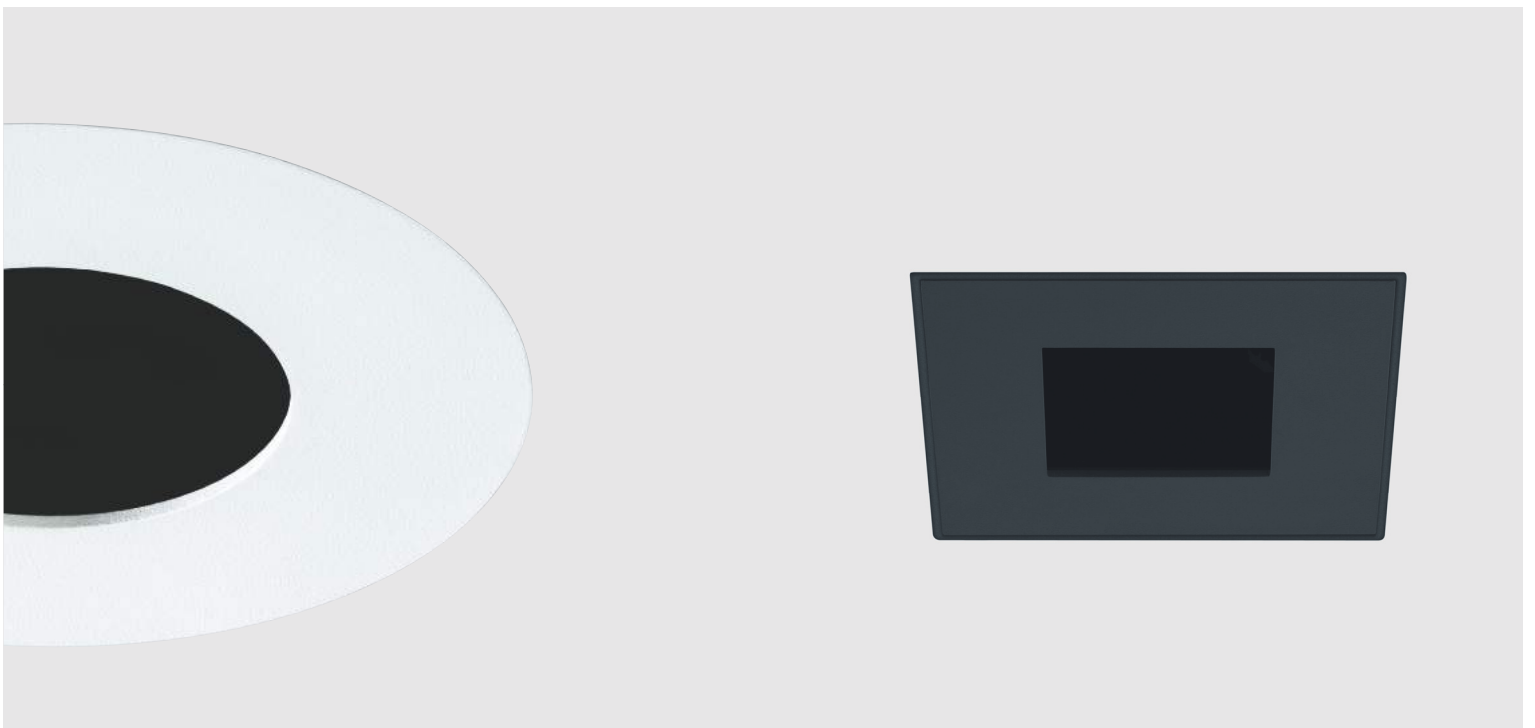

**Standard Finishes:**



Embossed  
matte white  
12



Embossed  
matte black  
31

**On request:**

- Chrome
- Gold
- Silver
- Copper
- Royal matte white
- Royal matte black
- Primer



**Plate shapes:**

\*Available for:  
M,L,XL versions



Round  
Flush



\*Round  
Cone



\*Round  
Curve  
(accessory)



Square  
Flush



\*Square  
Pyramid



\*Square  
Curve  
(accessory)

**Shapes:**



Round  
Trim



Round  
Trimless



Square  
Trim



Square  
Trimless

**Optics:**



Narrow




Medium




Wide

**Adjustability:**



Horizontal  
axis



Vertical  
axis

35°: S, XL versions  
40°: M, L versions

**Optic Accessories:**



Honeycomb



Holder for colored  
and selective filters

**Plate Accessories:**



IP44  
Glass



IP44  
Elliptical  
glass



IP44  
Diffusive  
lens



IP44  
Opal  
lens



IP44  
Wall washer\*  
lens



\*Available for:  
M,L,XL versions

### Technical features:

Round Trim



Trimless

S





3.5W  
 Initial: 300-400lm / L70 50.000h  
 2700K, 3000K, 3500K, 4000K / SDCM < 3  
 CRI > 80, CRI > 90  
 0-10V Dimming, Phase-cut  
 Remote housings

M

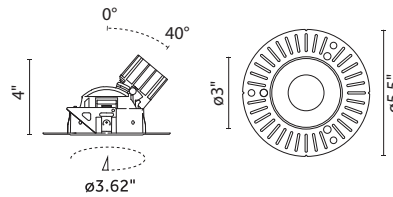

8.5W  
 Initial: 750-950lm / L70 50.000h  
 2700K, 3000K, 3500K, 4000K / SDCM < 3  
 CRI > 80, CRI > 90  
 0-10V Dimming, Phase-cut, Lutron  
 Air Tight, IC, Open, Remodel housings  
 CCEA Approved housings available



L

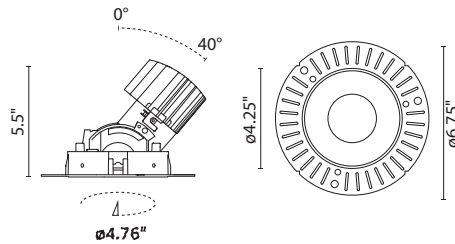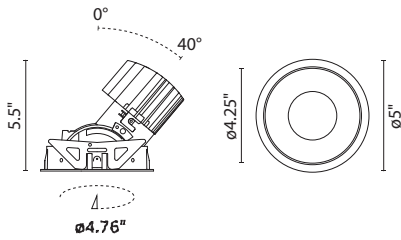

12W, 17W  
 Initial: 1350-2350lm / L70 50.000h  
 2700K, 3000K, 3500K, 4000K / SDCM < 3  
 CRI > 80, CRI > 90  
 0-10V Dimming, Phase-cut, Lutron  
 Air Tight, IC, Open, Remodel housings  
 CCEA Approved housings available

Warm Dimming: 13W  
 Initial: 105-1000lm  
 2000K-3000K, CRI > 95  
 Phase-cut  
 Air Tight, IC, Open, Remodel housings  
 CCEA Approved housings available

XL

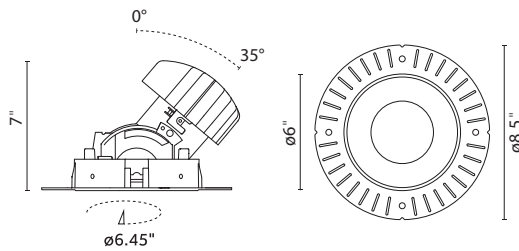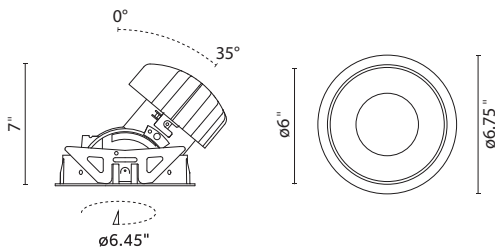


25W, 34W  
 Initial: 2950-4950lm / L70 50.000h  
 2700K, 3000K, 3500K, 4000K / SDCM < 3  
 CRI > 80, CRI > 90  
 0-10V Dimming, Phase-cut, Lutron  
 Open, Remodel housings

Warm Dimming: 34W  
 Initial: 155-2860lm  
 2000K-3000K, CRI > 95  
 Phase-cut  
 Open, Remodel housings




Technical features:

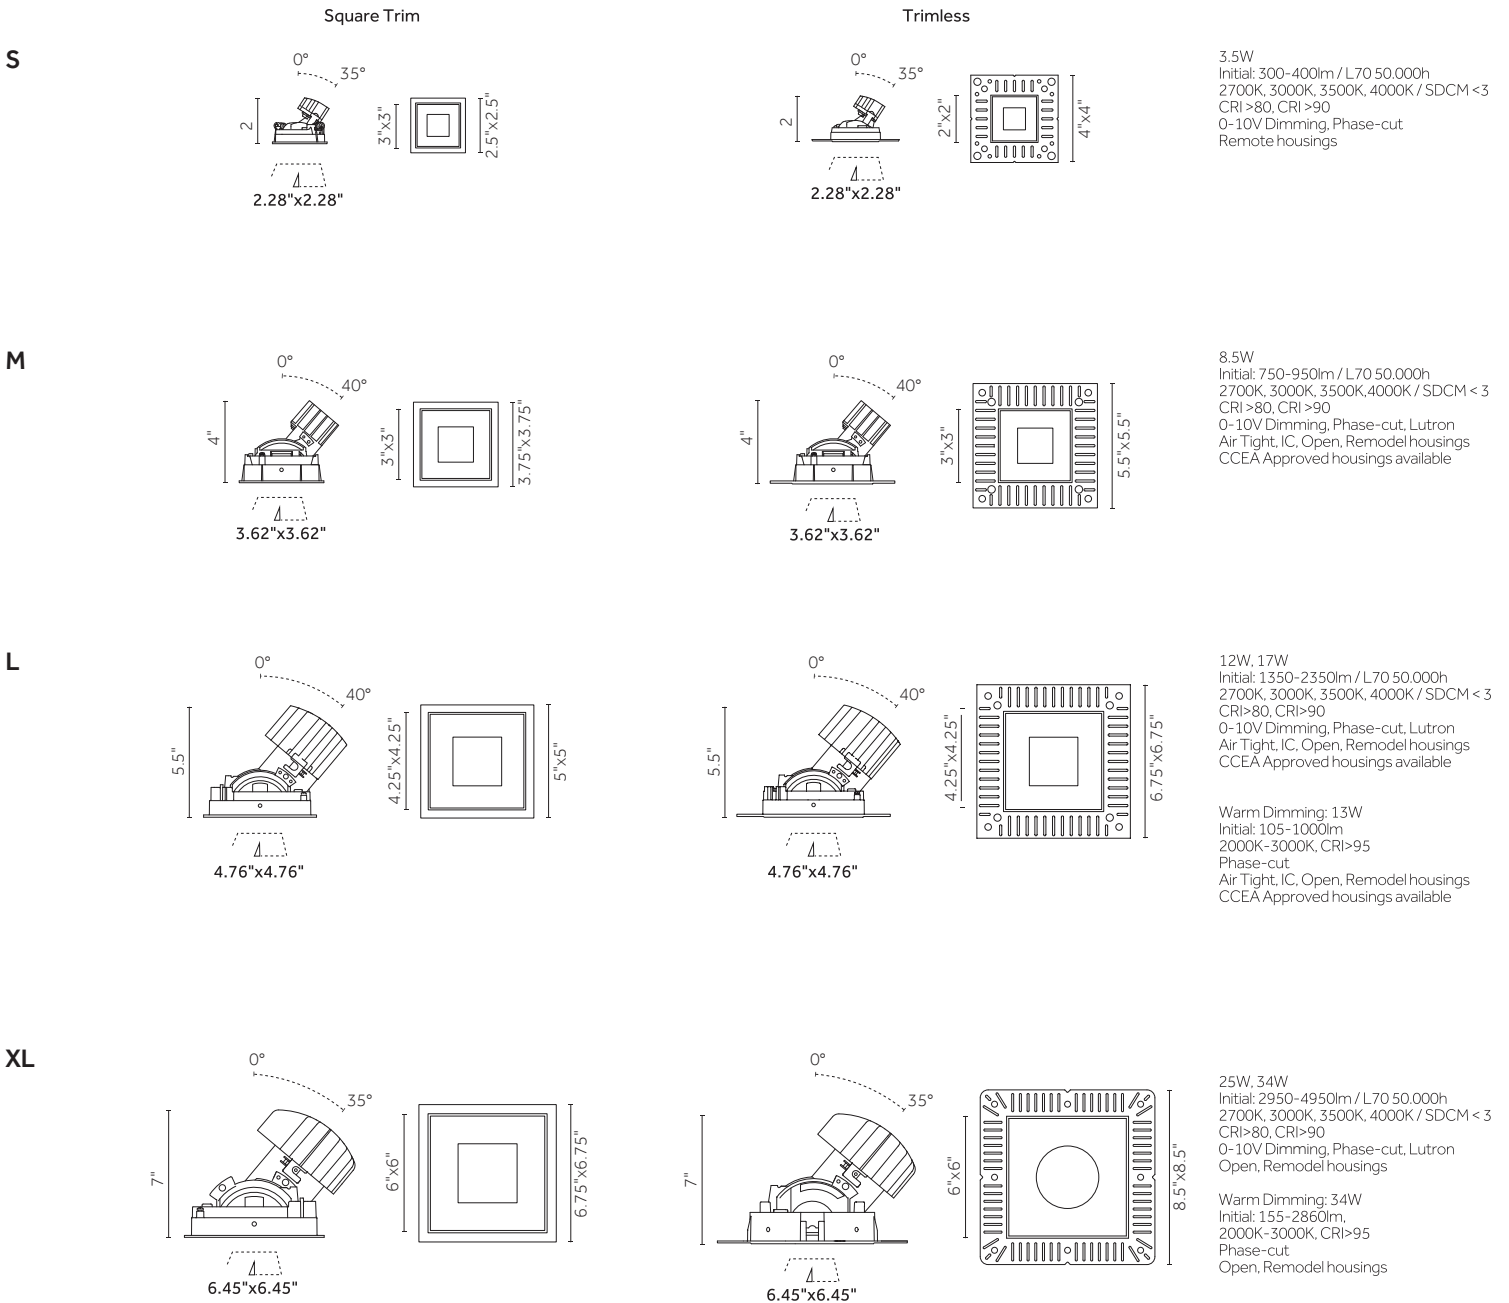


- Watt and lumen data refer to nominal values of the LED source, for photometric data visit [www.reggianiusa.com](http://www.reggianiusa.com).  
 - Dimensions are nominal.  
 - For 3500K lead time, please consult factory.


Sizes:

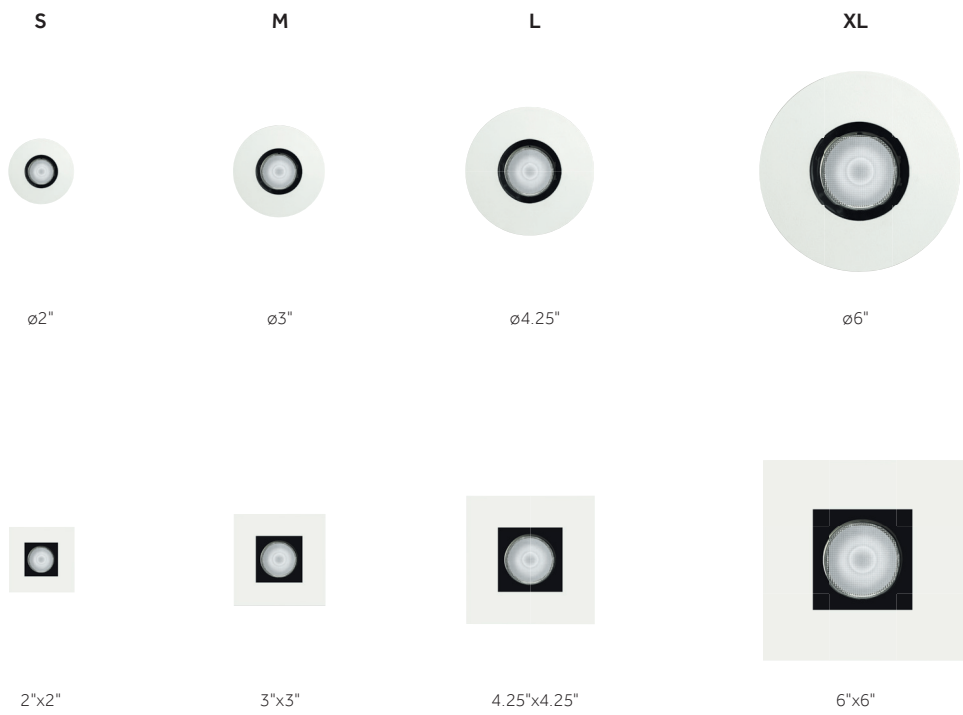

Adjustability:




Horizontal axis  
(358°)



Vertical axis  
35°: S, XL versions  
40°: M, L versions



Different shapes, trims and finishes

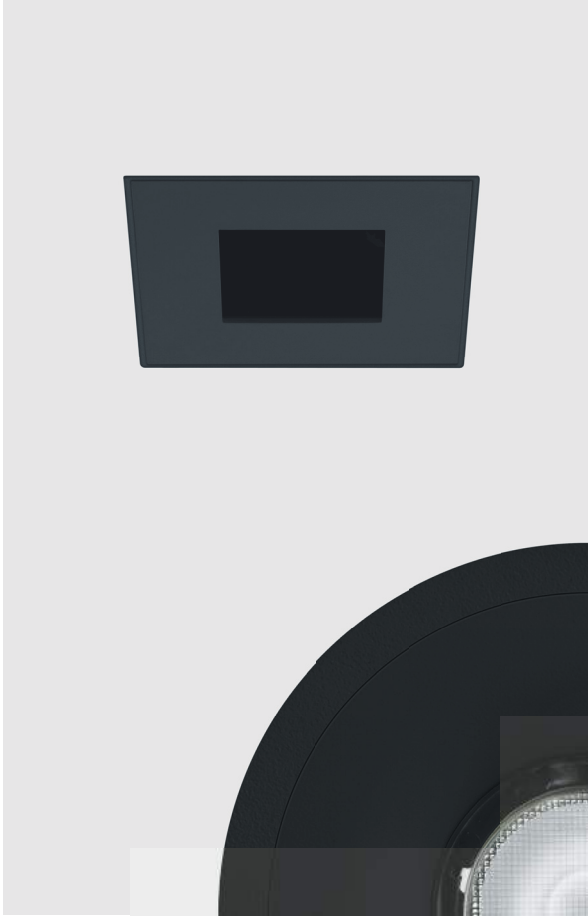

Newly designed optics for narrow, medium and wide beam angles




Easy lock and adjustability system, no tools required

Adjustable graduated scale

# Mood Fixed

Our wide range of fixed Mood comes in five sizes, from 1.25 inches to 6 inches. The opal diffuser makes the light soft, and the reflectors can change the beam angles, providing flexibility. It is ideal for residential and hospitality applications and IP44 certification provides durability and protection.

**IP:** damp location IP44

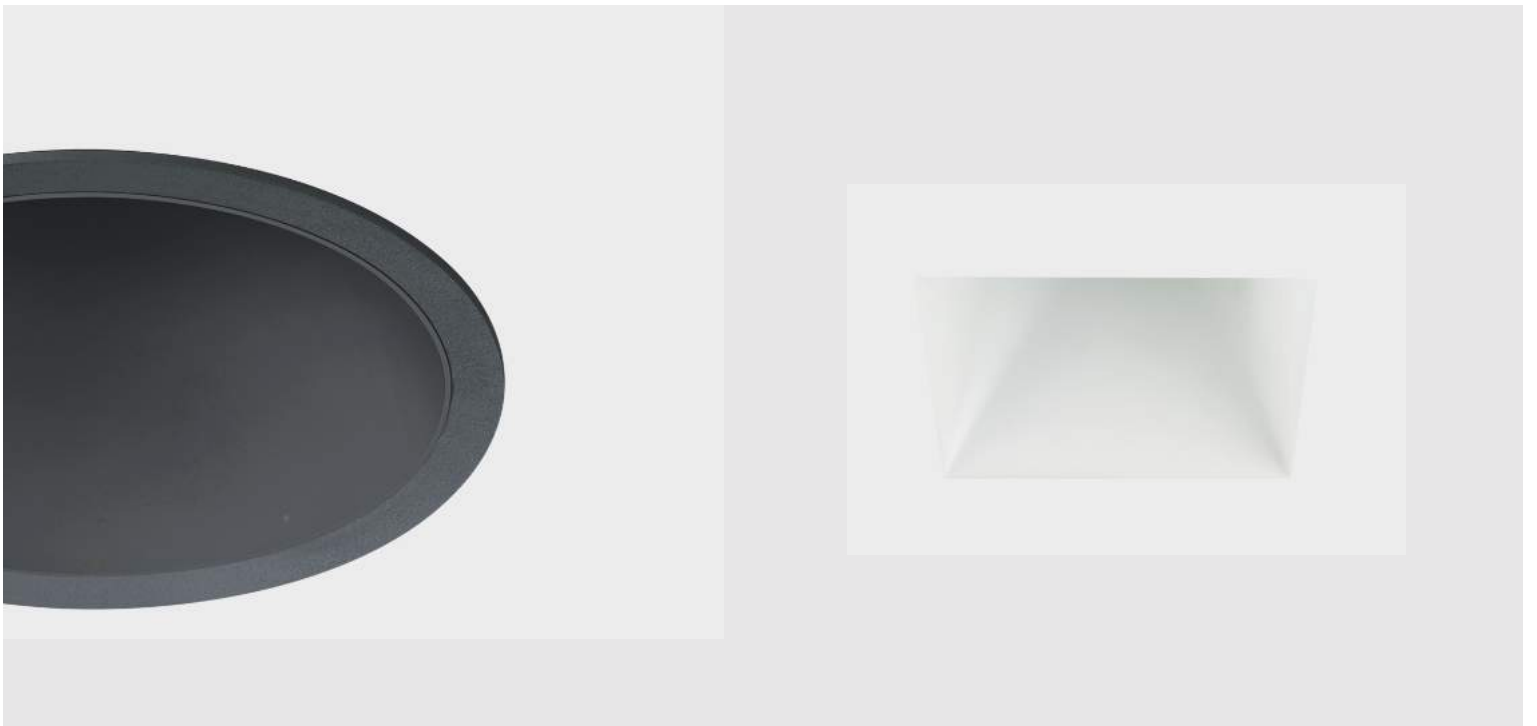

**Finishes:**



Embossed  
matte white  
12



Embossed  
matte black  
31



Embossed  
matte black/Gold  
T7



Embossed  
matte white/Copper  
T9

**On request:**

- Chrome
- Gold
- Silver
- Copper
- Royal matte white
- Royal matte black
- Primer



**Shapes:**



Round  
Trim



Round  
Trimless



Square  
Trim



Square  
Trimless

**Optics:**



Narrow



Medium



Wide

**Alternate Versions:**



Hollow  
dome



Hollow  
cylinder

**Technical features:**

	Round trim	Trimless	
<b>XS</b>	<p style="text-align: center;">2" ø1.45" ø1.5"</p>	<p style="text-align: center;">2" ø1.45" ø3"</p>	<p>2.5W Initial: 150-200lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM &lt; 3 CRI &gt;80, CRI &gt;90 0-10V Dimming, Phase-cut Remote housings</p>
<b>S</b>	<p style="text-align: center;">3.25" ø2.28" ø2.5"</p>	<p style="text-align: center;">3.25" ø2.28" ø4"</p>	<p>3.5W Initial: 300-400lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM &lt; 3 CRI &gt;80, CRI &gt;90 0-10V Dimming, Phase-cut Remote housings</p>
<b>M</b>	<p style="text-align: center;">4.75" ø3.62" ø3.75"</p>	<p style="text-align: center;">4.75" ø3.62" ø5.5"</p>	<p>8.5W Initial: 750-950lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM &lt; 3 CRI &gt;80, CRI &gt;90 0-10V Dimming, Phase-cut, Lutron Air Tight, IC, Open, Remote housings CCEA Approved housings available</p>
<b>L</b>	<p style="text-align: center;">5.25" ø4.76" ø5"</p>	<p style="text-align: center;">5.25" ø4.76" ø6.25"</p>	<p>12W, 17W Initial: 1350-2350lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM &lt; 3 CRI &gt;80, CRI &gt;90 0-10V Dimming, Phase-cut, Lutron Air Tight, IC, Open, Remote housings CCEA Approved housings available</p> <p>Warm Dimming: 13W Initial: 105-1000lm 2000K-3000K, CRI &gt;95 Phase-cut Air Tight, IC, Open, Remote housings CCEA Approved housings available for</p>
<b>XL</b>	<p style="text-align: center;">7" ø6.45" ø6.75"</p>	<p style="text-align: center;">7" ø6.45" ø8.75"</p>	<p>25W, 34W Initial: 2950-4950lm / L70 50.000h 2700K, 3000K, 3500K, 4000K / SDCM &lt; 3 CRI &gt;80, CRI &gt;90 0-10V Dimming, Phase-cut, Lutron Open, Remodel housings</p> <p>Warm Dimming: 34W Initial: 155-2860lm 2000K-3000K, CRI &gt;95 Phase-cut Open, Remodel housings</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit [www.reggianiusa.com](http://www.reggianiusa.com).  
 - Dimensions are nominal.  
 - For 3500K lead time, please consult factory.

Technical features:

	Square trim	Trimless	
<b>XS</b>	<p>2.25" 1.25"x1.25" 1.75"x1.75" 1.45"x1.45"</p>	<p>2.25" 1.25"x1.25" 3"x3" 1.45"x1.45"</p>	<p>2.5W Initial: 150-200lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM &lt; 3 CRI &gt; 80, CRI &gt; 90 0-10V Dimming, Phase-cut Remote housings</p>
<b>S</b>	<p>3.25" 2"x2" 2.5"x2.5" 2.28"x2.28"</p>	<p>3.25" 2"x2" 4"x4" 2.28"x2.28"</p>	<p>3.5W Initial: 300-400lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM &lt; 3 CRI &gt; 80, CRI &gt; 90 0-10V Dimming, Phase-cut Remote housings</p>
<b>M</b>	<p>4.75" 3"x3" 3.75"x3.75" 3.62"x3.62"</p>	<p>4.75" 3"x3" 5.5"x5.5" 3.62"x3.62"</p>	<p>8.5W Initial: 750-950lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM &lt; 3 CRI &gt; 80, CRI &gt; 90 0-10V Dimming, Phase-cut, Lutron Air Tight, I.C. Open, Remodel housings CCEA Approved housings available</p>
<b>L</b>	<p>5.25" 4.25"x4.25" 5"x5" 4.76"x4.76"</p>	<p>5.25" 4.25"x4.25" 6.25"x6.25" 4.76"x4.76"</p>	<p>12W, 17W Initial: 1350-2350lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM &lt; 3 CRI &gt; 80, CRI &gt; 90 0-10V Dimming, Phase-cut, Lutron Air Tight, I.C. Open, Remodel housings CCEA Approved housings available</p> <p>Warm Dimming: 13W Initial: 105-1000lm 2000K-3000K, CRI &gt; 95 Phase-cut Air Tight, I.C. Open, Remodel housings CCEA Approved housings available</p>
<b>XL</b>	<p>7" 6"x6" 7"x7" 6.45"x6.45"</p>	<p>7" 6"x6" 8.75"x8.75" 6.45"x6.45"</p>	<p>25W, 34W Initial: 2950-4950lm / L70 50,000h 2700K, 3000K, 3500K, 4000K / SDCM &lt; 3 CRI &gt; 80, CRI &gt; 90 0-10V Dimming, Phase-cut, Lutron Open, Remodel housings</p> <p>Warm Dimming: 34W Initial: 155-2860lm 2000K-3000K, CRI &gt; 95 Phase-cut Open, Remodel housings</p>

- Watt and lumen data refer to nominal values of the LED source, for photometric data visit [www.reggianiusa.com](http://www.reggianiusa.com).  
 - Dimensions are nominal.  
 - For 3500K lead time, please consult factory.

**Sizes:**



XS

S

M

L

XL





ø1.25"

ø2"

ø3"

ø4.25"

ø6"



1.25"x1.25"

2"x2"

3"x3"

4.25"x4.25"

6"x6"

**Alternate Versions**



Hollow dome



Hollow cylinder




High performance compact heat sink



Recessed LED source for excellent visual comfort



High quality of finishes and minimalist design

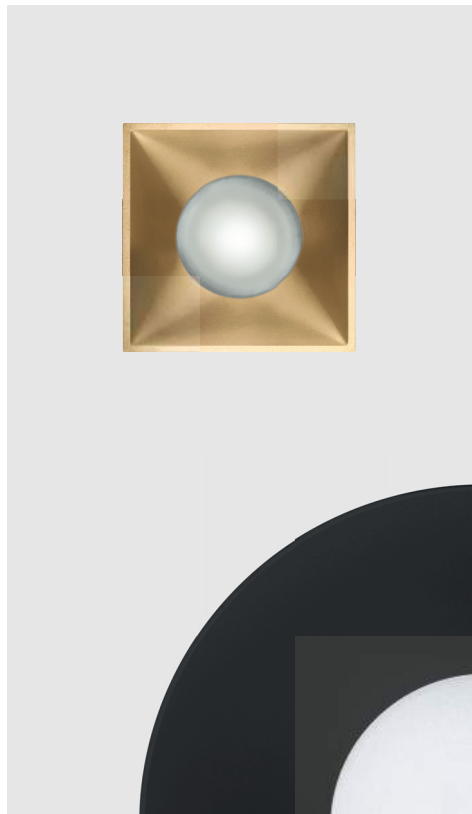

Silicone gasket for IP44 protection

Diffusive dome for soft light effect



# Mood Wall Washer

Our ultimate solution for wall wash illumination with both circular and square shapes available. We offer four sizes of minimal recessed downlights, scaling from two to six inches, and both flush and drop plates.

**IP:** damp location IP44



**Finishes:**



Embossed  
matte white  
12



Embossed  
matte black  
31

**On request:**

- Chrome
- Gold
- Silver
- Copper
- Royal matte white
- Royal matte black
- Primer



**Plate shapes:**



Round  
Flush



Round  
Drop



Square  
Flush



Square  
Drop



Round flush  
Elliptical lens  
(accessory)



Round drop  
Elliptical lens  
(accessory)



Square flush  
Elliptical lens  
(accessory)



Square drop  
Elliptical lens  
(accessory)

**Shapes:**



Round  
Trim



Round  
Trimless



Square  
Trim



Square  
Trimless

**Optics:**




Wall  
washer\*

\*Different distributions available in accordance to primary and secondary optics selection.

**Adjustability:**


Steps




1



2




3



4


3 steps: S,M,L versions  
4 steps: XL Version

**Technical features:**

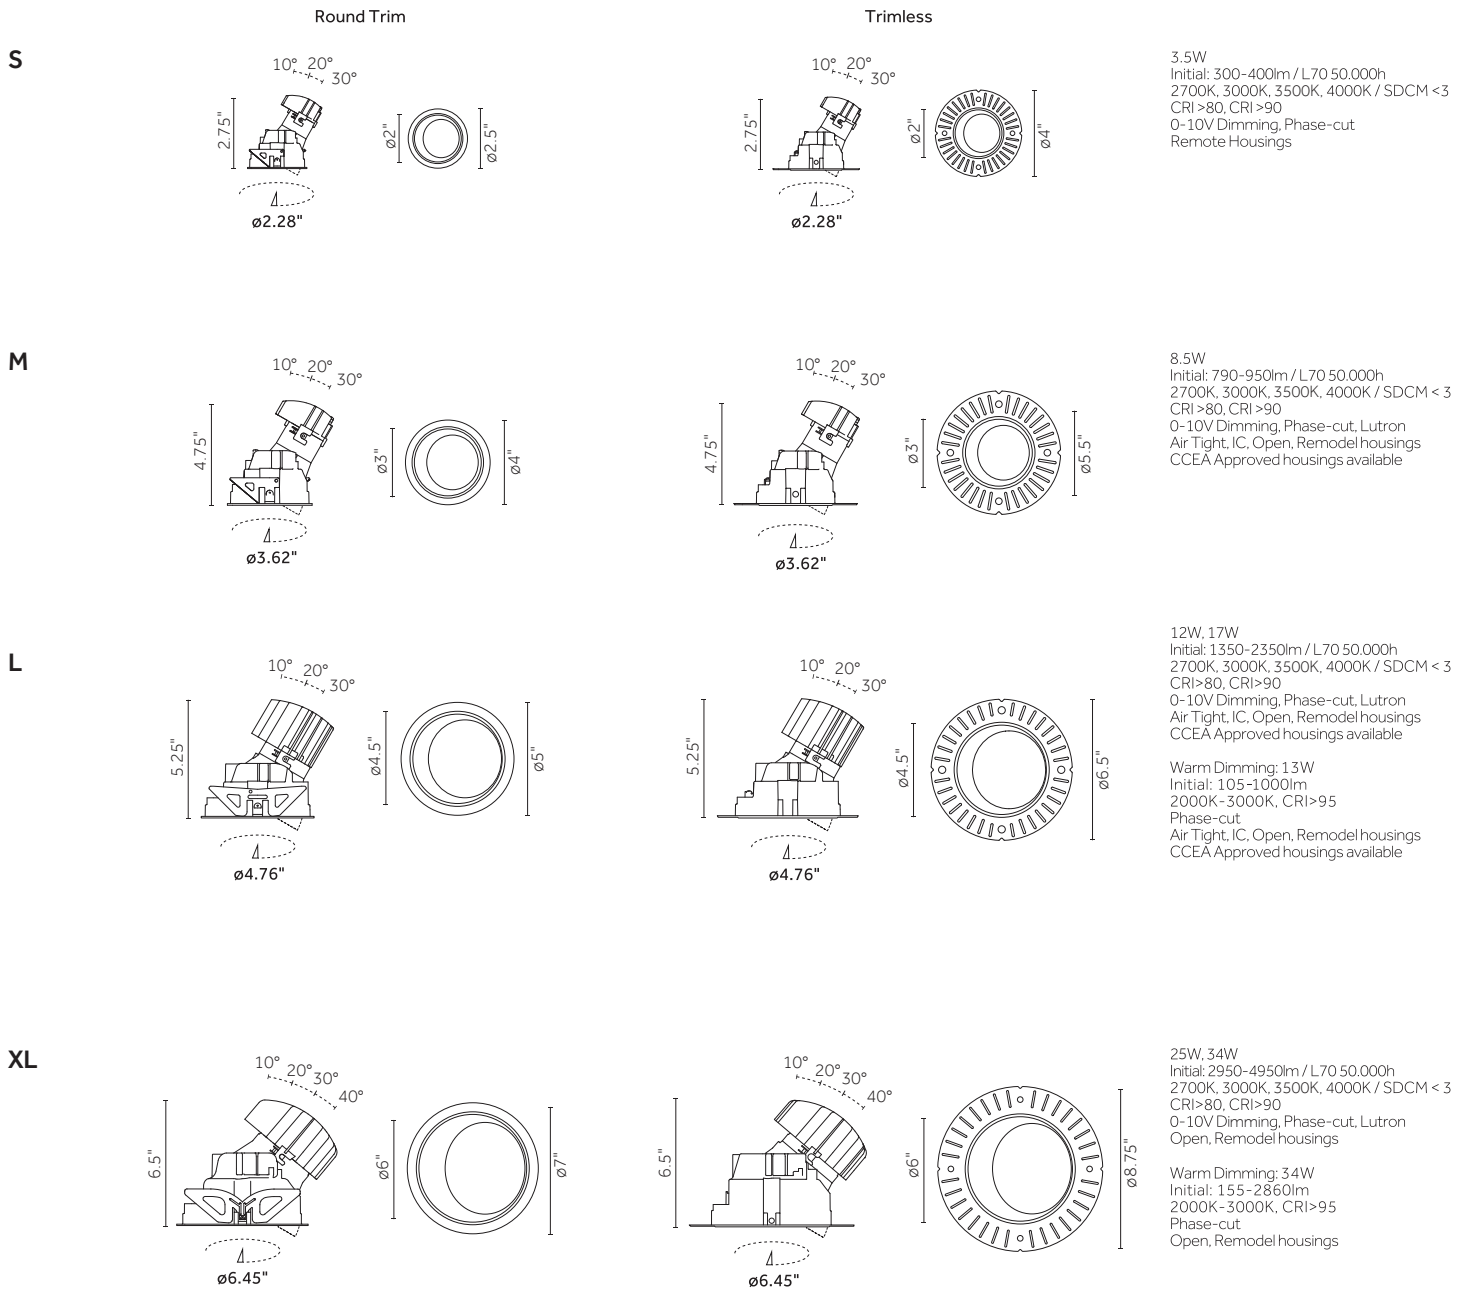


- Watt and lumen data refer to nominal values of the LED source, for photometric data visit [www.reggianiusa.com](http://www.reggianiusa.com).  
- Dimensions are nominal.  
- For 3500K lead time, please consult factory.

**Technical features:**

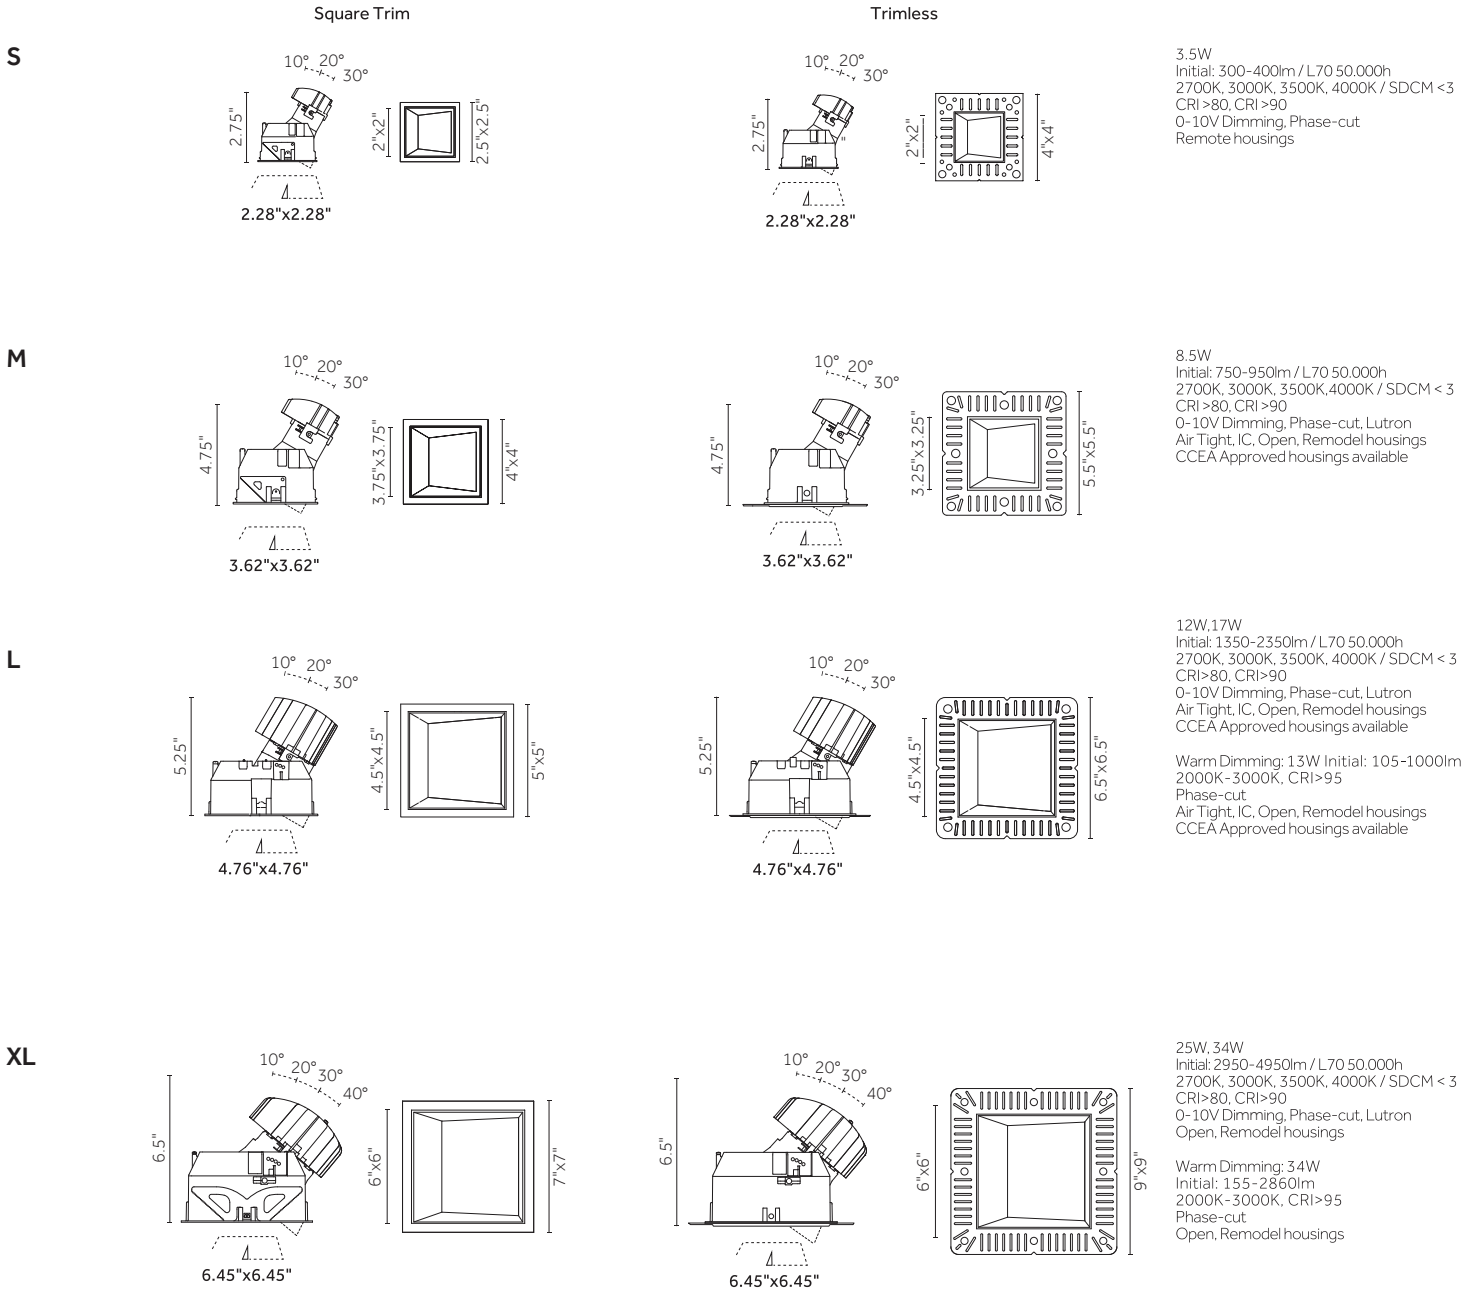


- Watt and lumen data refer to nominal values of the LED source, for photometric data visit [www.reggianiusa.com](http://www.reggianiusa.com).  
 - Dimensions are nominal.  
 - For 3500K lead time, please consult factory.


**Sizes:**

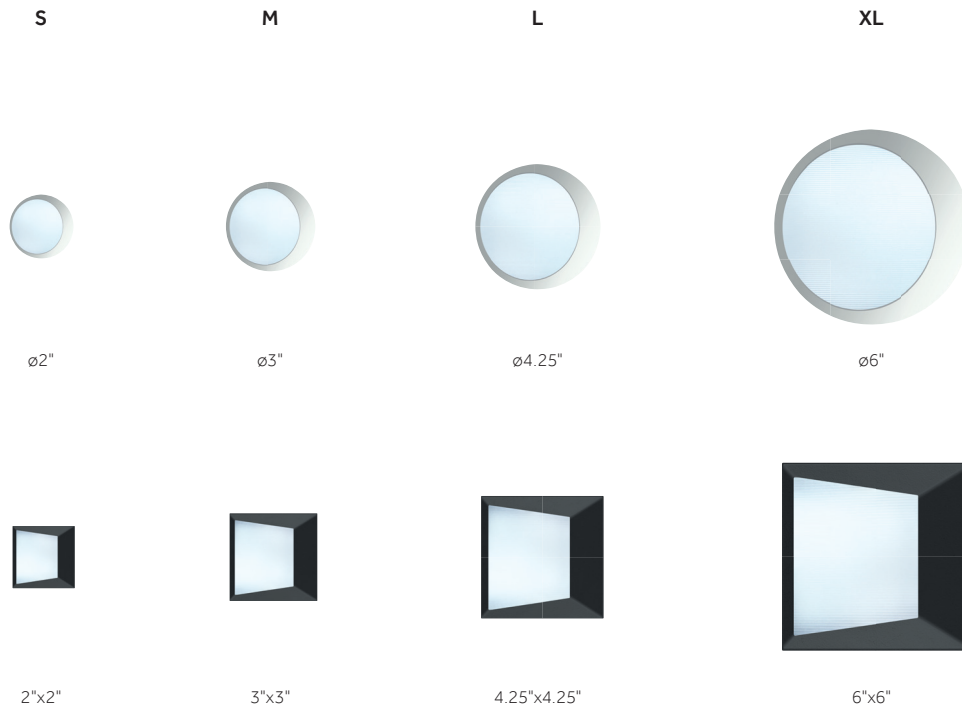


**Adjustability:**



3 steps: S,M,L versions  
4 steps: XL version (40°)

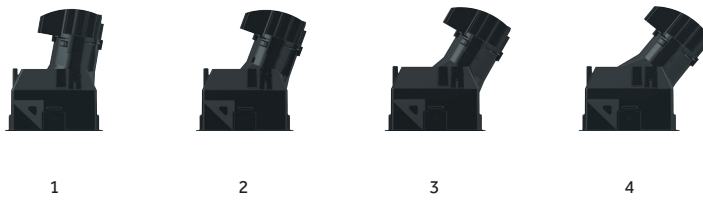

High performance diffuser

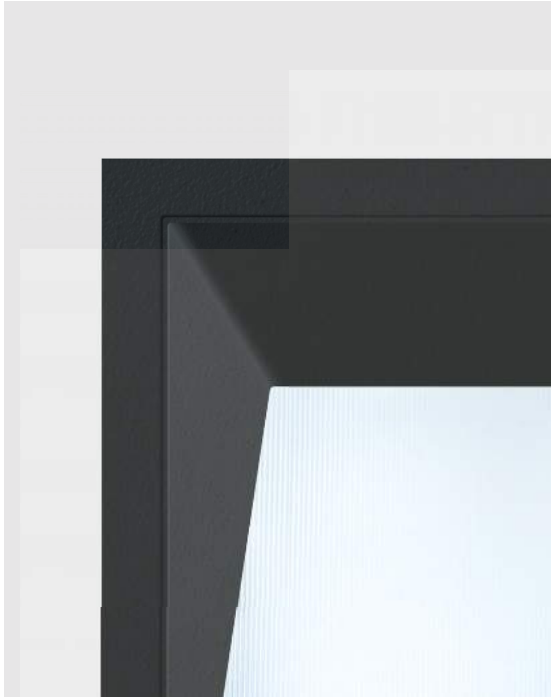

Minimalist design

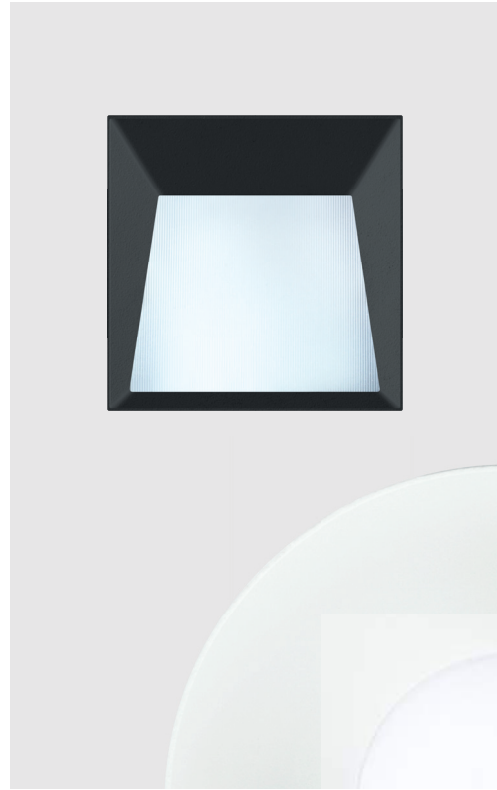


Plate version: drop



Plate version: flush





**Reggiani**  
NORTH AMERICA



# Worldwide contacts

## HEADQUARTERS

### ITALY

#### Reggiani Spa Illuminazione

Viale Monza 16 P.O. Box 99  
20845 Sovico (MB), Italy  
T. (+39) 039 20711  
F. (+39) 039 2071999  
contact@reggiani.net

## UNITED KINGDOM

### Reggiani Ltd

12 Chester Road  
Borehamwood  
Herts, WD6 1LT - UK  
T. (+44) 0208 236 3000  
F. (+44) 0208 236 3099  
reggiani@reggiani.co.uk

## USA

### Reggiani Lighting USA, inc.

372 Starke Road  
Carlstadt NJ 07072, USA  
T. (+1) 201 372 1717  
F. (+1) 201 372 1616  
info@reggianiusa.com  
www.reggianiusa.com

## CHINA

### Reggiani Ningbo ITG Lighting co. Ltd

Shenjia Village - Qiulai Town - Yinzhou  
315010 Ningbo, China  
T. (+86) 574 88418655 - 88412627  
F. (+86) 574 88364186  
info@itglight.com

## FRANCE

### Showroom

Showroom Bureau Projets  
35 Bd. Richard Lenoir, Bastille  
75011 Paris, France  
T. (+33) 01 43382704  
F. (+33) 01 43382720  
france@reggiani.net

## RUSSIA

### Showroom

Kalanchevskaya Street, 16,  
Building 1, Room 4A, 129090 Moscow  
T. (+7) 495 2690113 - 846 3320266  
F. (+7) 495 2690112  
russia@reggiani.net

## Worldwide distributors

For the worldwide distributors list visit  
[www.reggiani.net](http://www.reggiani.net)



