

Minimalism and functionality

Yori



Reggiani
NORTH AMERICA



Yori


- **Yori Surface/Pendant**
- **Yori Linear**
- **Yori Wall**
- **Yori Track**
- **Yori Recessed**
- **Yori Monopoint**
- **Yori 48V**

Minimalism and rigour in the service of functionality, Yori is a high performance luminaire with a compact footprint.






Finishes:

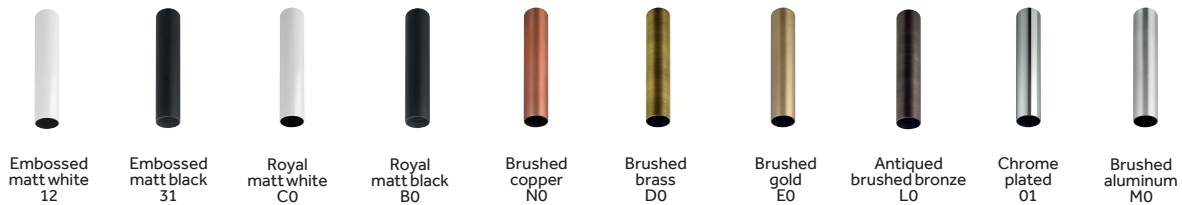

Embossed matt white 12 Embossed matt black 31 Royal matt white C0 Royal matt black B0 Brushed copper N0 Brushed brass D0 Brushed gold E0 Antiqued brushed bronze L0 Chrome plated 01 Brushed aluminum M0

Versions:



Surface Pendant

Optics:



Narrow Medium Wide Very Wide


1" dia x 6"L / 16"L / 31.5"L / 63"L	9°	24°	32°	
1.4" dia x 6"L / 16"L / 31.5"L	8°	22°	28°	
2.4" dia x 8"L / 10"L / 24"L	12°	20°	32°	
3.7" dia x 10"L / 13"L / 16"L / 31.5"L	12°	24°	38°	53°

Yori Pendant Mounting Options:



4' Cord


Accessories:

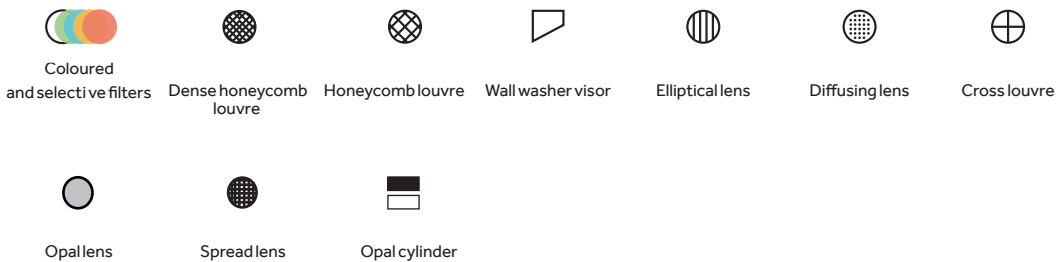

Coloured and selective filters Dense honeycomb louvre Honeycomb louvre Wall washer visor Elliptical lens Diffusing lens Cross louvre
Opal lens Spread lens Opal cylinder


Surface Technical Features:

Ø 1"

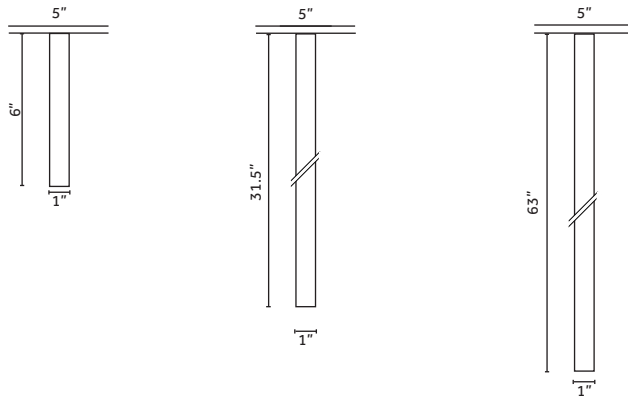


2 W
Lumen delivered up to 110lm
L90 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut
Remote driver

Ø 1.4"



3.5 W
Lumen delivered up to 192lm
L90 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut
Remote driver


Ø 2.4"

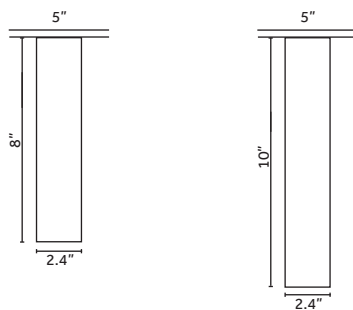

5W / 8" long, 9W / 10" long
Lumen delivered up to 650lm; 1000lm
L80 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut
Remote driver

Warm Dimming
6W / 10" Long
Lumen delivered up to 350Lm
Lumen maintenance: L70 B50=50,000h.
1700K-3000K
CRI >95
Dimming 0-10V
Remote driver

Ø 3.7"

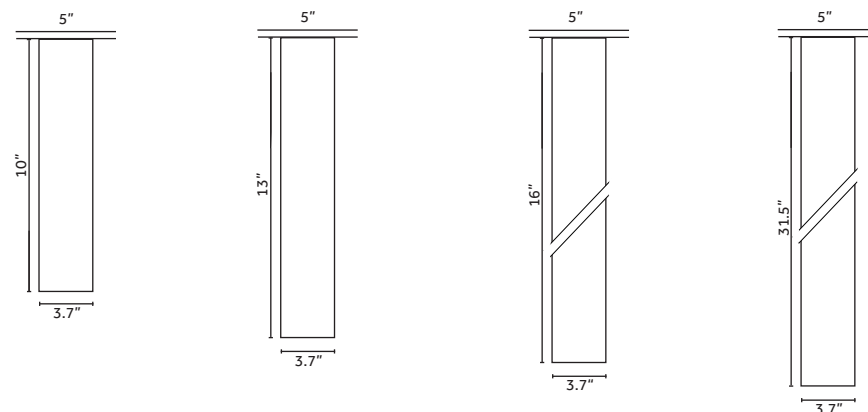

12W / 10" long, 17W / 13" long,
24W / 16" and 31.5" long
Lumen delivered up to 1500lm; 2100lm; 2800lm
L80 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut,
Lutron EcoSystem
Remote driver

Warm Dimming
25W / 16" and 31.5" long
Lumen delivered up to 1200lm
1700K-3000K
CRI >95
Dimming 0-10V, Phase-cut,
Lutron Ecosystem
Remote driver


- Custom length up to 94.5" on request.

- Watt lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.

- For 3500K, must consult with factory to confirm availability.


Pendant Technical Features:

Ø 1"

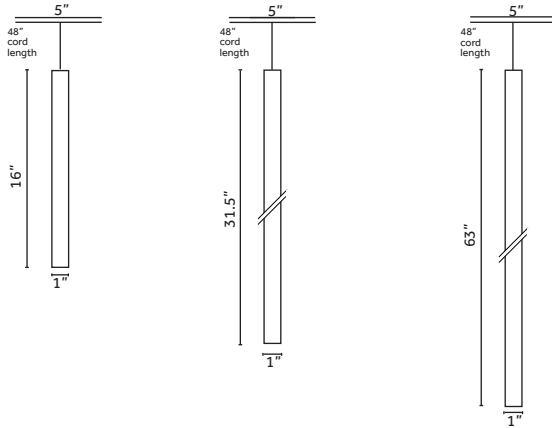


2 W
Lumen delivered up to 110lm
L90 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut
Remote driver

Ø 1.4"

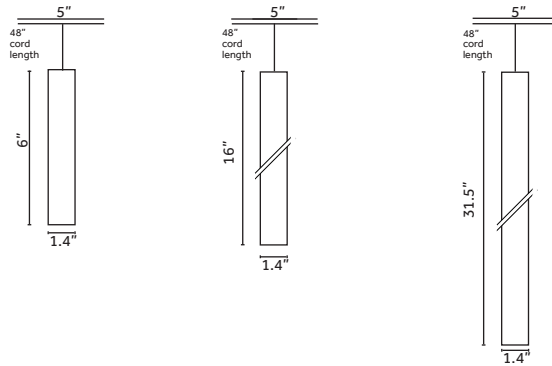

3.5 W
Lumen delivered up to 192lm
L90 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut
Remote driver


Ø 2.4"

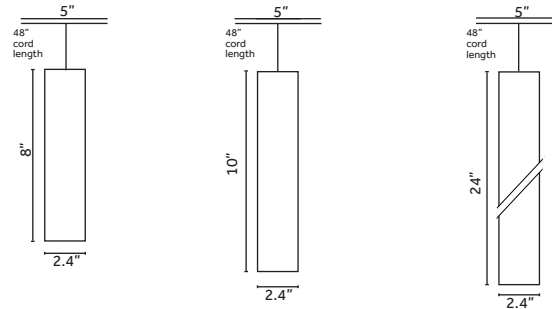

5W / 8" long; 9W / 10" long; 12W / 24" long
Lumen delivered up to 650lm; 1000lm; 1400lm
L80 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut
Remote driver

Warm Dimming
6W / 10" long, 12W / 24" long
Lumen delivered up to 350Lm; 690Lm
Lumen maintenance: L70 B50=50,000h.
1700K-3000K
CRI >95
Dimming 0-10V, Phase-cut
Remote driver

Ø 3.7"

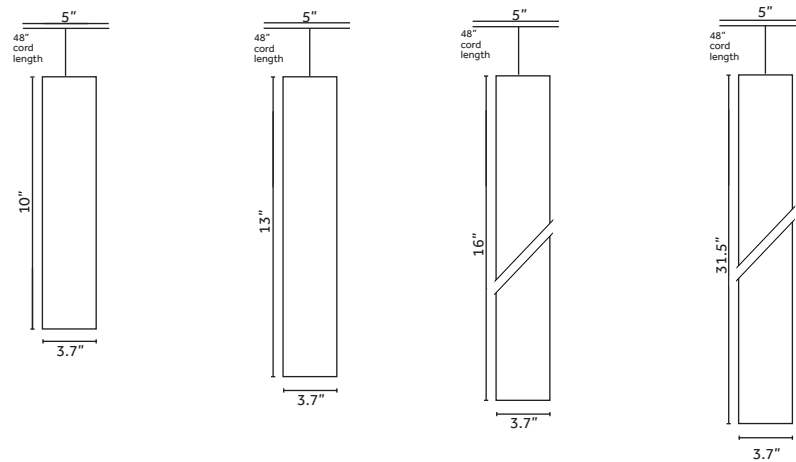

12W / 10" long, 17W / 13" long,
24W / 16" and 31.5" long
Lumen delivered up to 1500lm;
2100lm; 2800 lm
L80 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut,
Lutron EcoSystem
Remote driver

Warm Dimming
25W / 16" and 31.5" long
Lumen delivered up to 1200lm
1700K-3000K
CRI >95
Dimming 0-10V, Phase-cut,
Lutron Ecosystem
Remote driver

Opal Cylinder Sizes:




Closed version



Hollow version


Ø1"

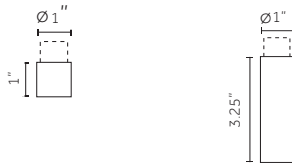


Ø1.4"





Ø2.4"




Ø3.7"



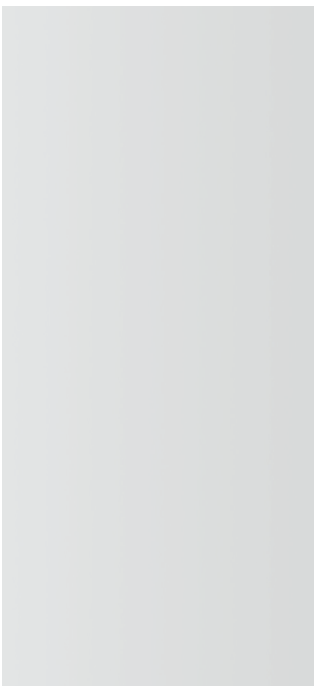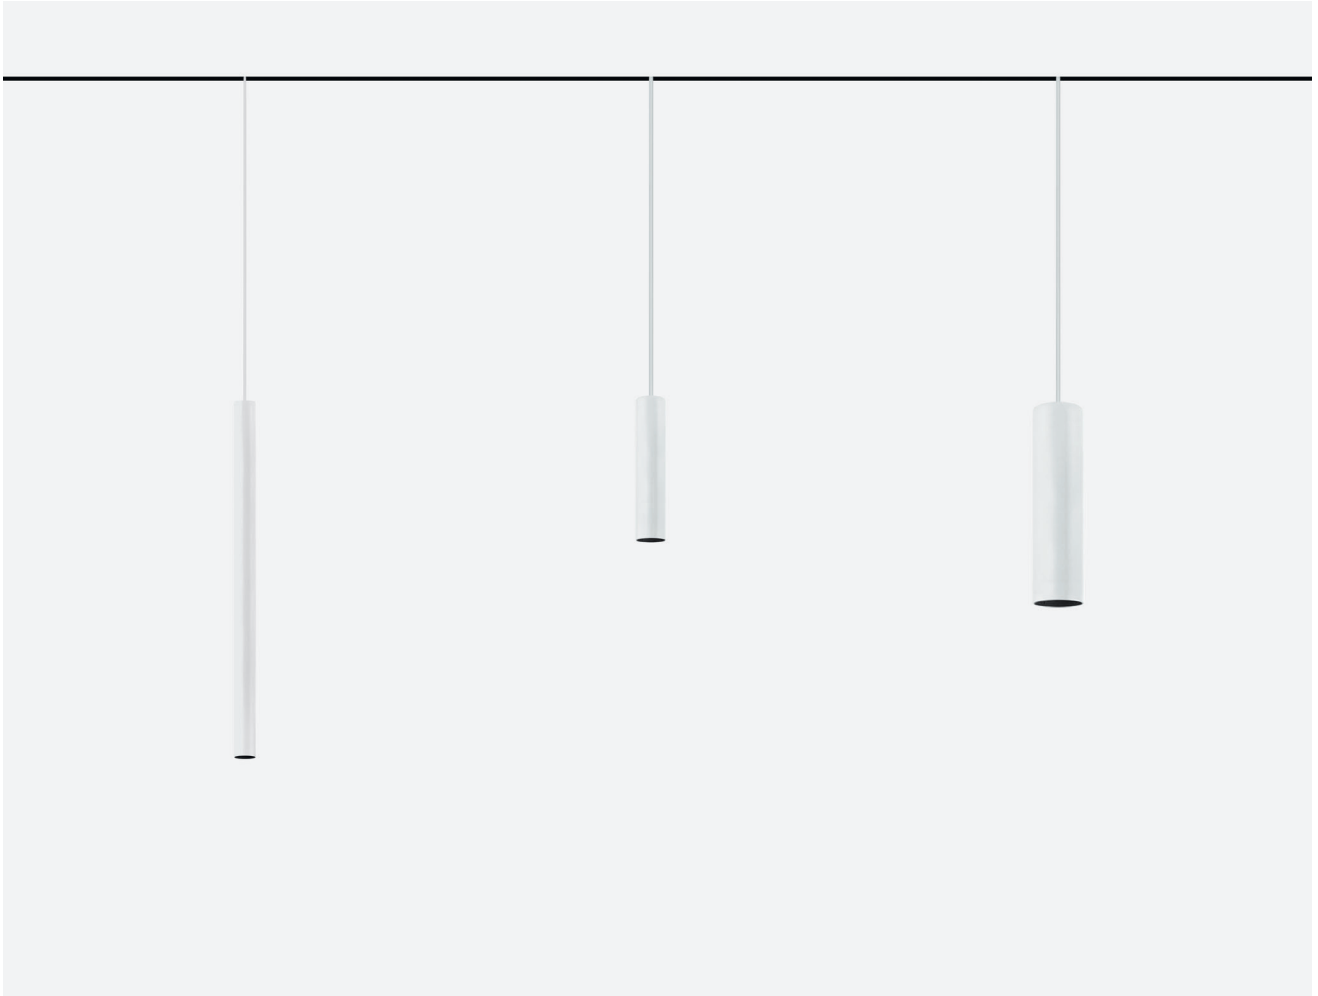

Yori Linear Track


Yori Linear provides comfortable diffuse illumination that complements accent lighting. This linear solution is suitable for track mounting applications to integrate with the profile of the Yori Track Head. With five different diffusers and a variety of lengths for a single, connected or continuous line of light, the possibilities are endless.

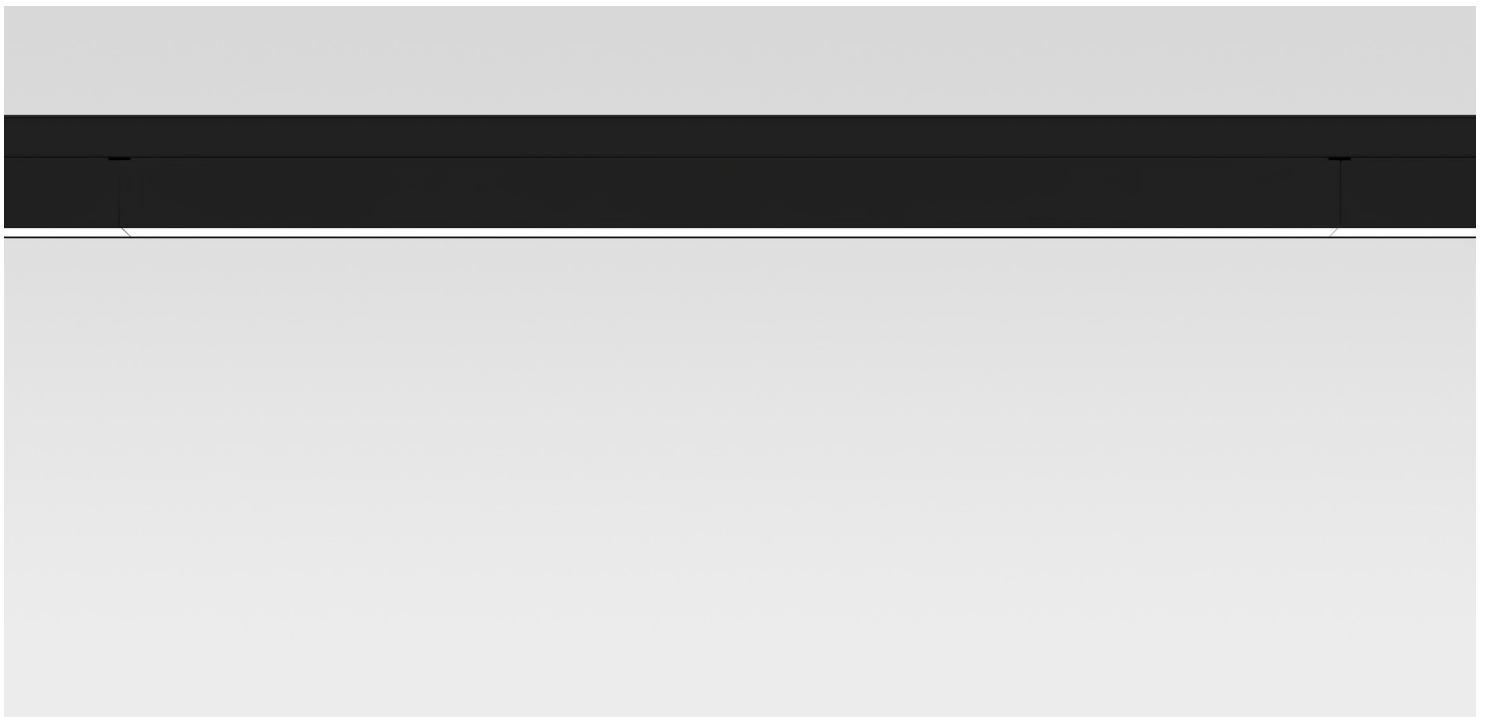

Finishes:



Embossed
matt white
12



Embossed
matt black
12

Product Sizes:



1.5 ft



3 ft



4.5 ft

System Options:



Single



Continuous line

Optical Options:



Opal



Prismatic



Louver
(UGR 19)




Opal
U-Shape



Ribbed


Technical Features:

1.5ft

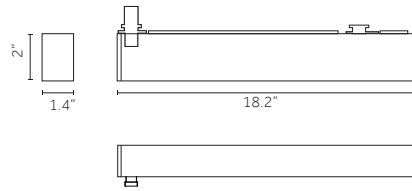


13W
Lumen delivered up to 1870lm
L70 B10=50.000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming Phase-cut

3ft

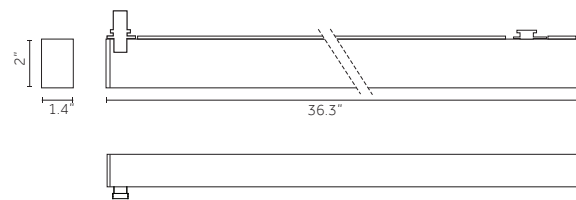


26W
Lumen delivered up to 3570lm
L70 B10=50.000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming Phase-cut

4.5ft

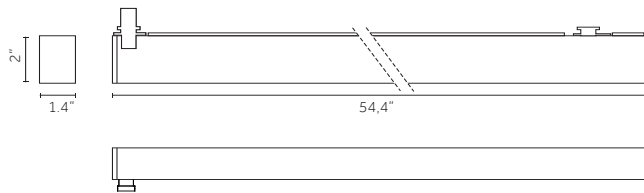

38W
Lumen delivered up to 4850lm
L70 B10=50.000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming Phase-cut

Continuous Line:

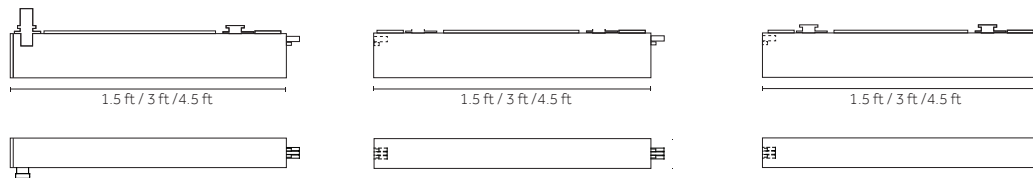


- Watt lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.
- For 3500K, must consult with factory to confirm availability.



Yori Linear Recessed

Yori Linear is available in single modules or in a continuous line configuration. The elegant, practical continuous line is provided by combining luminaires of different lengths fitted with special plug and socket connectors. Yori Linear Recessed features an elegant, understated line with a very minimal trim. The continuous line configuration of Yori Linear recessed includes a 90° corner module for even more versatile lighting design projects.



Finishes:



Embossed
matt white
12



Embossed
matt black
12

Product Sizes:



1.5 ft



3 ft



4.5 ft

System Options:



Single



Continuous line



90 module

Optical Options:



Opal



Prismatic




Louver
(UGR 19)



Ribbed


Technical Features:

1.5ft

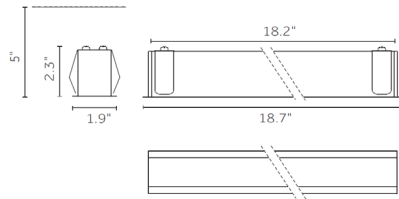


13W
 Lumen delivered up to 1870lm
 L70 B10 =50,000h
 2700K, 3000K, 3500K, 4000K
 CRI >80, CRI >90
 Dimming 0-10V, Phase-cut,
 Lutron EcoSystem
 Remote driver

3ft

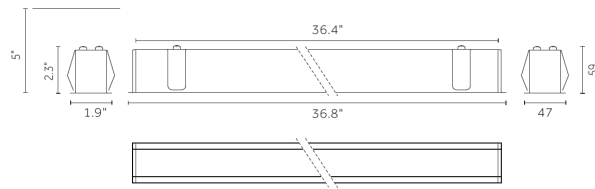

26W
 Lumen delivered up to 3570lm
 L70 B10 =50,000h
 2700K, 3000K, 3500K, 4000K
 CRI >80, CRI >90
 Dimming 0-10V, Phase-cut,
 Lutron EcoSystem
 Remote driver

4.5ft

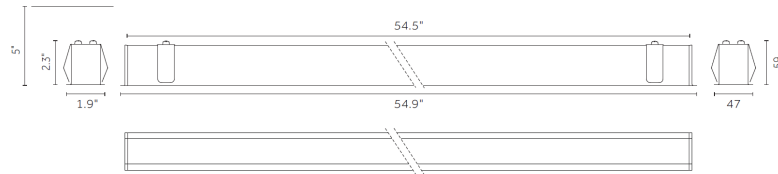


38W
 Lumen delivered up to 4850lm.
 L70 B10 =50,000h
 2700K, 3000K, 3500K, 4000K
 CRI >80, CRI >90
 Dimming 0-10V, Phase-cut,
 Lutron EcoSystem
 Remote driver

Technical Features:


Continuous Line:

1.5ft

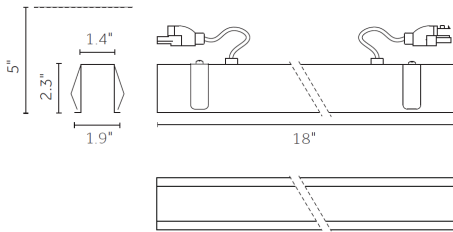


13W
Lumen delivered up to 1870lm
L70 B10 =50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut,
Lutron EcoSystem
Remote driver

3ft

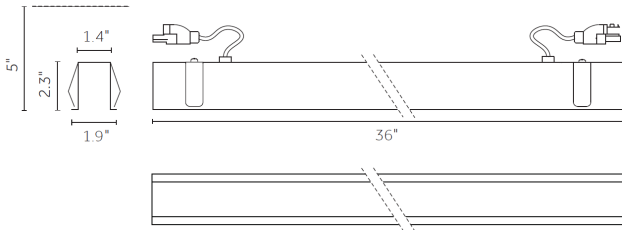


26W
Lumen delivered up to 3570lm
L70 B10 =50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut,
Lutron EcoSystem
Remote driver

4.5ft

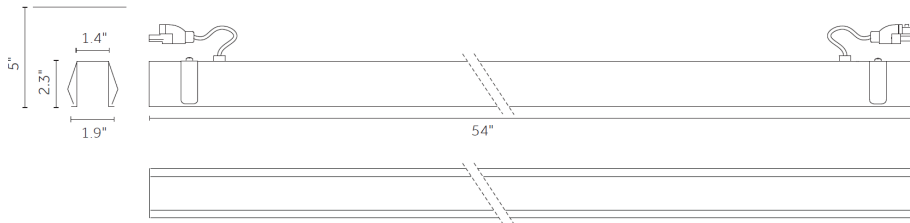

38W
Lumen delivered up to 4850lm.
L70 B10 =50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut,
Lutron EcoSystem
Remote driver

3ft 90° Module

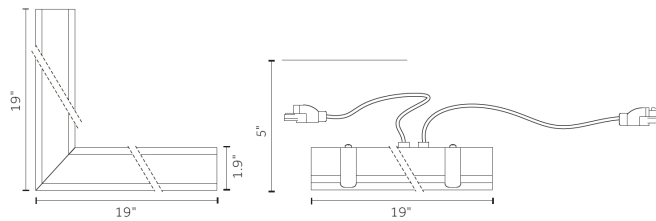

26W
Lumen delivered up to 3570lm
L70 B10 =50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut,
Lutron EcoSystem
Remote driver

Also available in 2,4,6 and 8ft for acoustic tile ceiling (ATC)


- Watt lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.
- For 3500K, must consult with factory to confirm availability.

Yori Wall


Transform any interior with this comprehensive range of wall mounted architectural luminaires. Yori Wall offers a huge degree of flexibility: beyond the three basic sizes there are different high-end finishes, interchangeable optics and direct-indirect light versions.



Finishes:

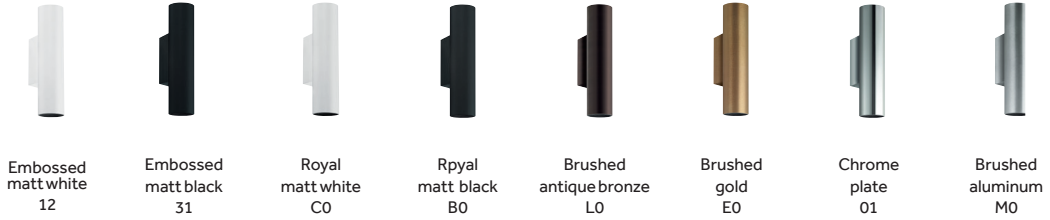

Versions:

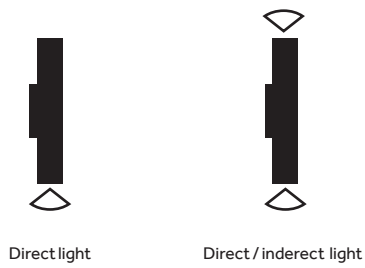


Optics:



1.4" dia x 8.3"L
 2.4" dia x 9.8"L
 3.7" dia x 15.6"L


8°	22°			
12°	20°	32°		
12°	24°	38°	53°	

Accessories:

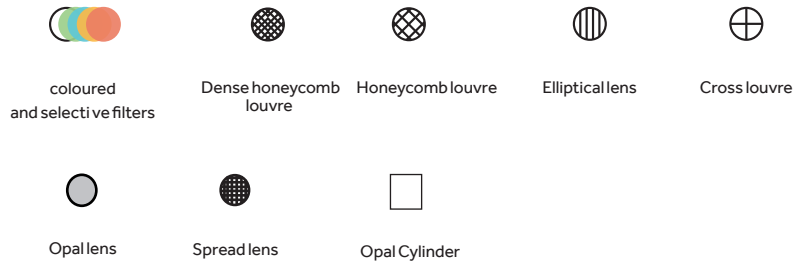

Technical Features:


Ø1.4"

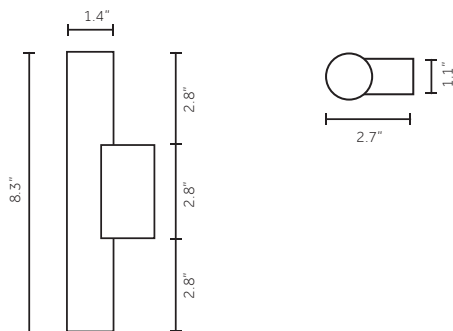

Single emission:
3.5W
Lumen delivered up to 310lm
L90 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V
Remote driver

Double emission:
2W x 2
Lumen delivered up to
160+ 160lm
L90 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V
Remote driver


Ø2.4"

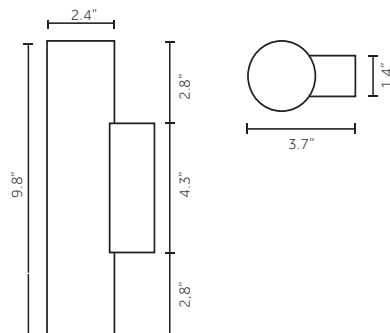

Single emission:
9W
Lumen delivered up to 1115lm
L80 B50=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V,
Lutron EcoSystem
Remote driver


Double emission:
5W x 2
Lumen delivered up to
720+720lm
L80 B50=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V,
Lutron EcoSystem
Remote driver

Ø3.7"

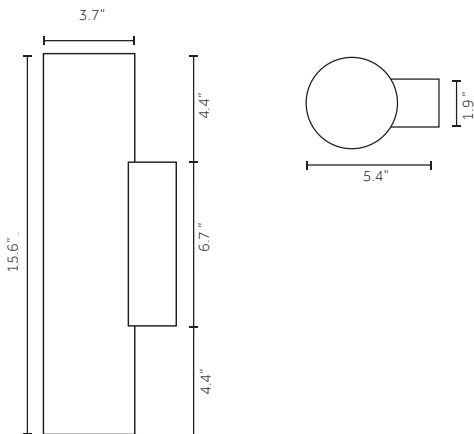

Single emission:
25W
Lumen delivered up to 2800lm
L80 B50=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut,
Lutron EcoSystem
Remote driver

Double emission:
12W x 2
Lumen delivered up to
1540+1540lm
L80 B50=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut,
Lutron EcoSystem
Remote driver

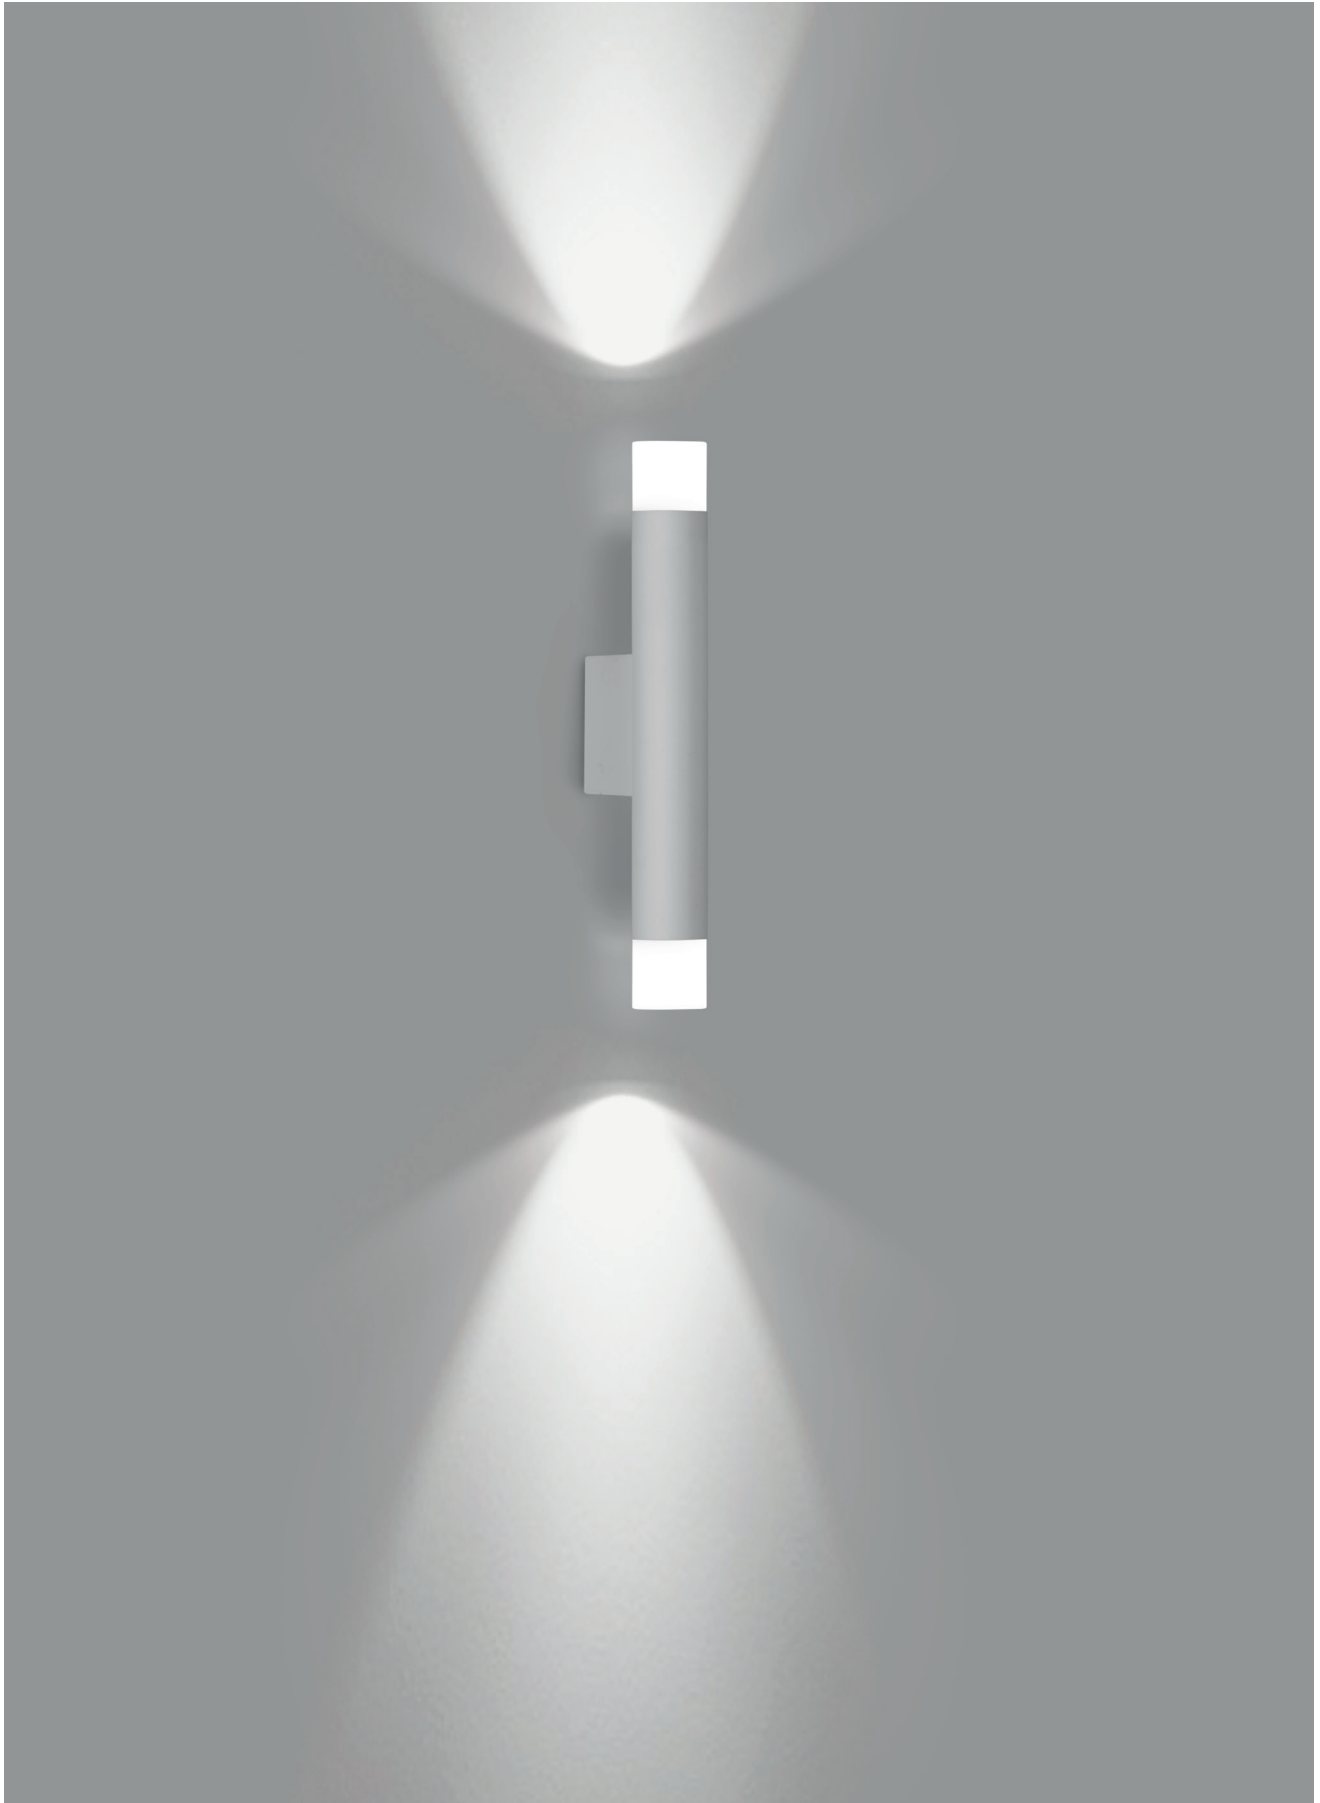

Yori Evo Box

The Yori Evo Box extends the features of the Yori range to a flexible track mounted accent light with a simple, elegant design. It comes in four sizes and features the Precision and Performance optics with different light output, beam angles and intensity. The accessories that complete this family make it even more versatile.



Finishes:



Embossed
matt white
12



Embossed
matt black
31

Special finishes on request

Product Sizes:



Ø 1.7"



Ø 2.4"



Ø 3.0"



Ø 3.7"

Optics:



Narrow



Medium



Wide



Very Wide

1.7" dia Precision	8°	11°	23°	40°
1.7" dia Performance	8°	18°	29°	
2.4" dia Precision	8°	20°	32°	
2.4" dia Performance	13°	24°	39°	
3.0" dia Precision	7°	23°		
3.0" dia Performance	12°	23°	37°	48°
3.7" dia Precision	7°	24°		
3.7" dia Performance	10°	20°	31°	40°

Accessories:



coloured
and selective filters



Dense honeycomb
louvre



Honeycomb louvre



Wall washer visor



Elliptical lens



Cross louvre




Opal lens



Spread lens




Barn doors

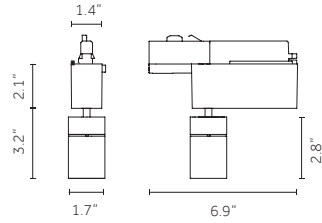Technical Features:**Ø1.7**


4W,9W
Lumen delivered up to 435/750lm Precision
Lumen delivered up to 450/780lm Performance
L90 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut,
Lutron EcoSystem

Warm Dimming COB LED
6.5W
Lumen delivered up to 130lm
L80 B10=50,000 h
1700K- 3000K
CRI >95
Phase-cut

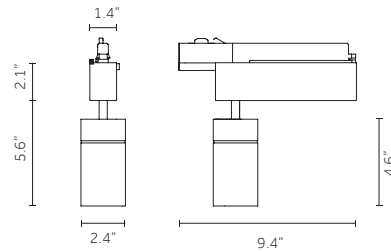Ø2.4"


9W,12W,17W
Lumen delivered up to 1115/1455/1970lm
Precision
Lumen delivered up to 1200/1560/2110lm
Performance
L80 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut,
Lutron EcoSystem

Warm Dimming COB LED
12W
Lumen delivered up to 690lm
L70 B10=50,000 h
1700K-3000K
CRI >95
Dimming 0-10V, Phase-cut,
Lutron EcoSystem

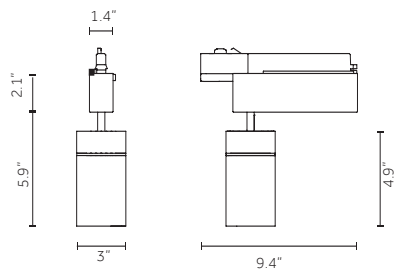Ø3"

12W,17W, 24W,28W
Lumen delivered up to 1575/2190/2955/3325lm
Precision
Lumen delivered up to 1800/2399/3550/3770lm
Performance
L80 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut,
Lutron EcoSystem

Warm Dimming COB LED
25W
Lumen delivered up to 1100lm
L70 B10=50,000 h
1700K-3000K,
CRI >95
Dimming 0-10V, Phase-cut

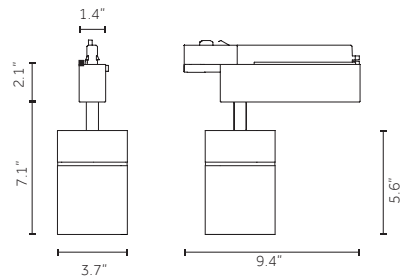Ø3.7"

12W,17W, 24W,33W,37W
Lumen delivered up to
1690/2351/3170/4130/4477lm Precision
Lumen delivered up to
1800/2500/3500/4110/4530lm Performance
L90 B10=50,000 h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut,
Lutron EcoSystem

Warm Dimming COB LED
33W
Lumen delivered up to 1520lm
L70 B10=50,000 h
1700K-3000K
CRI >95
Dimming 0-10V, Phase-cut



Yori Recessed

Yori Recessed is a high performance luminaire with a compact footprint. Available in two sizes, four shapes, and trim or trimless. The light engine can be completely hidden inside the ceiling plane and function as a downlight, or it may be pulled below the ceiling plane and adjusted.




Finishes:



Product Sizes:




Shapes:

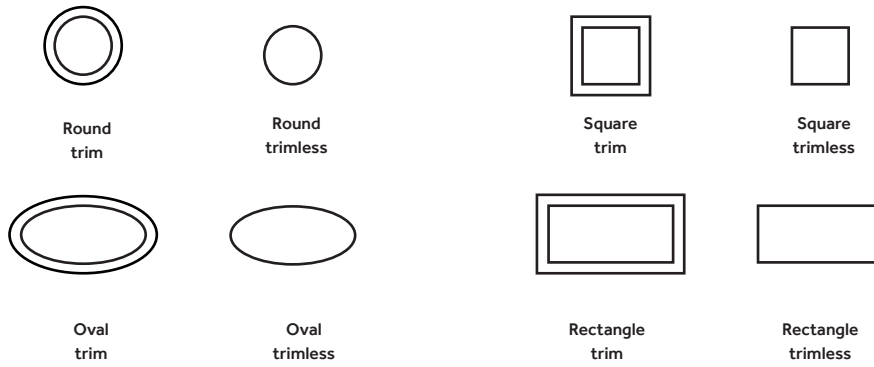

Optics:







Accessories:

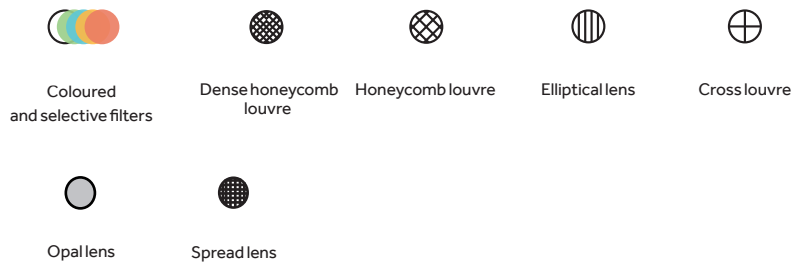

Technical Features:





Ø2.4" Round



9W,12W
Lumen delivered up to 1115/1455lm Precision
Lumen delivered up to 1200/1560lm Performance
L80 B10=50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut,
Lutron EcoSystem

Warm Dimming COB LED
12W
Lumen delivered up to 690lm Precision
L90 B10=50,000h
1700K- 3000K
CRI >95
Dimming 0-10V, Phase-cut,
Lutron EcoSystem





Ø2.4" Square



9W,12W
Lumen delivered up to 1115/1455lm Precision
Lumen delivered up to 1200/1560lm Performance
L80 B10=50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut,
Lutron EcoSystem

Warm Dimming COB LED
12W
Lumen delivered up to 690lm Precision
L90 B10=50,000h
1700K-3000K,
CRI >95
Dimming 0-10V, Phase-cut,
Lutron EcoSystem





Ø2.4" Rectangle

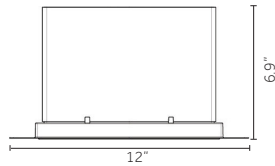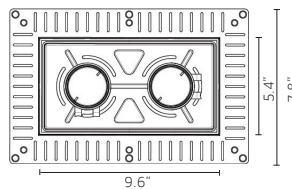

9Wx2,12Wx2
Lumen delivered up to 1115x2/1455x2lm Precision
Lumen delivered up to 1200x2/1560x2lm Performance
L80 B10=50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut,
Lutron EcoSystem

Warm Dimming COB LED
12Wx2
Lumen delivered up to 690x2lm Precision
L90 B10=50,000h
1700K- 3000K
CRI >95
Dimming 0-10V, Phase-cut,
Lutron EcoSystem





Ø2.4" Oval

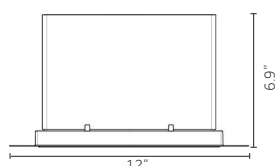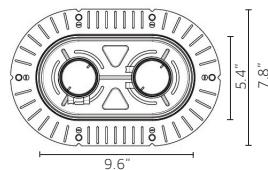

9Wx2,12Wx2
Lumen delivered up to 1115x2/1455x2lm Precision
Lumen delivered up to 1200x2/1560x2lm Performance
L80 B10=50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut,
Lutron EcoSystem





Warm Dimming COB LED
12Wx2
Lumen delivered up to 690x2lm Precision
L90 B10=50,000h
1700K -3000K,
CRI >95
Dimming 0-10V, Phase-cut,
Lutron EcoSystem

Ø3.7" Round







12W,17W,24W
Lumen delivered up to 1690/2350/3170lm
Precision
Lumen delivered up to 1800/2500/3300lm
Performance
L70 B10=50,000h
2700K, 3000K, 3500K,4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut,
Lutron EcoSystem

Ø3.7" Square






12W,17W,24W
Lumen delivered up to 1690/2350/3170lm
Precision
Lumen delivered up to 1800/2500/3300lm
Performance
L70 B10=50,000h
2700K, 3000K, 3500K,4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut

Ø3.7" Rectangle

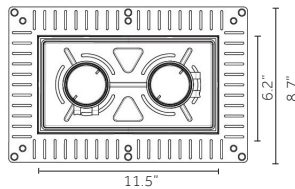



12Wx2,17Wx2
Lumen delivered up to 1690x2/2350x2lm
Precision
Lumen delivered up to 1800x2/2500x2lm
Performance
L70 B10=50,000h
2700K, 3000K, 3500K,4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut

Ø3.7" Oval

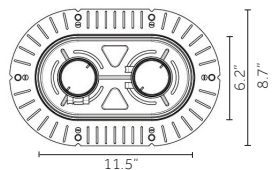

12Wx2,17Wx2
Lumen delivered up to 1690x2/2350x2lm
Precision
Lumen delivered up to 1800x2/2500x2lm
Performance
L70 B10=50,000h
2700K, 3000K, 3500K,4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut

- Watt lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.
- For 3500K, must consult with factory to confirm availability

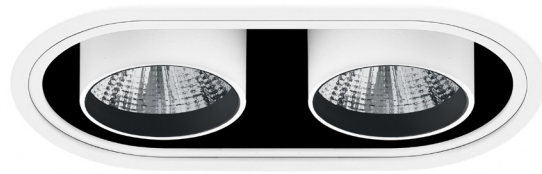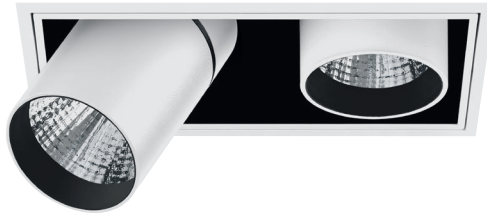



Yori Monopoint

The Yori Monopoint extends the features of the Yori range to a surface mounted adjustable accent light with a simple, elegant design. It comes in four sizes and features the Precision and Performance optics with different light output, beam angles and intensity. The accessories that complete this family make it even more versatile.



Finishes:



Embossed
matt white
12



Embossed
matt black
31

Product Sizes:




Ø 1.7 "



Ø 2.4 "



Ø 3.0 "



Ø 3.7 "

Optics:



Narrow



Medium



Wide



Very Wide

Accessories:



Coloured
and selective filters



Dense honeycomb
louvre



Honeycomb louvre



Wall washer visor



Elliptical lens



Cross louvre



Opal lens




Spread lens



Barn doors

Technical Features:


Ø1.7



4W,9W
Lumen delivered up to 435/750lm Precision
Lumen delivered up to 450/780lm Performance
L90 B10=50,000h
2700K, 3000K, 3500K,4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut, Lutron EcoSystem
Remote driver

Warm Dimming COB LED
6,5W
Lumen delivered up to 130lm
L80 B10=50,000h
1700K-3000K
CRI >95
Dimming 0-10V, Phase-cut
Remote driver


Ø2.4"



9W,12W,17W
Lumen delivered up to 1115/1455/1970lm Precision
Lumen delivered up to 1200/1560/2110lm Performance
L80 B10 = 50,000h
2700K, 3000K, 3500K,4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut, Lutron EcoSystem
Remote driver

Warm Dimming COB LED
12W
Lumen delivered up to 690lm
L70 B50=50,000h
1700K-3000K
CRI >95
Dimming 0-10V, Phase-cut, Lutron EcoSystem
Remote driver


Ø3"



12W,17W,24W
Lumen delivered up to 1575/2190/2955lm Precision
Lumen delivered up to 1800/2399/3350lm Performance
L80 B10=50,000h
2700K, 3000K, 3500K,4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, Phase-cut, Lutron EcoSystem
Remote driver

Warm Dimming COB LED
25W
Lumen delivered up to 1100lm
L70 B50=50,000h
1700K-3000K
CRI >95
Dimming 0-10V, Phase-cut
Remote driver

Ø3.7"

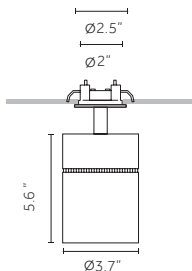

12W,17W,24W
Lumen delivered up to 1690/2350/3170lm Precision
Lumen delivered up to 1800/2500/3300lm Performance
L80 B10=50,000h
2700K, 3000K, 3500K,4000K
CRI >80, CRI >90
Dimming 0-10V, Phase-cut, Lutron EcoSystem
Remote driver

- Watt lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.

- For 3500K, must consult with factory to confirm availability

- Junction box option available for all sizes



Yori Channel & Channel Arm

Yori Channel & Channel Arm are high performance luminaires with compact footprints. Yori Channel can be pendant, recessed, or surface mounted, while Yori Channel Arm has an articulating arm and is surface mounted in a cove.



Finishes:



Embossed
matt white
12




Embossed
matt black
31

**Product
Sizes:**



Ø 2.4 "



Ø 3.7 "



Ø 2.4 "



Ø 3.7 "

Optics:



Narrow



Medium



Wide



Very Wide

Accessories:



Coloured
and selective filters



Dense honeycomb
louvre



Honeycomb louvre



Wall washer visor



Elliptical lens




Cross louvre



Opal lens




Spread lens

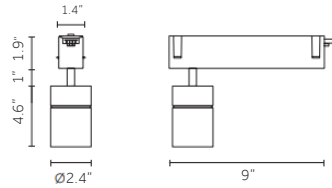Technical Features:**Ø2.4**


9W,12W,17W
 Lumens delivered up to 1115/1455/1970lm Precision
 Lumens delivered up to 1200/1560/2110lm Performance
 L80 B10=50,000h
 2700K, 3000K, 3500K, 4000K
 CRI >80, CRI >90, CRI >98
 Dimming 0-10V, Phase-cut

Warm Dimming COB LED
 12W
 Lumens delivered up to 690lm
 L70 B50=50,000h
 1700K-3000K
 CRI >95
 Dimming 0-10V, Phase-cut

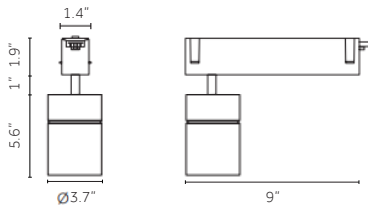
Ø3.7"

12W,17W,24W,33W, 37W
 Lumen delivered up to 1690/2351/3170/4130/4477lm Precision
 Lumen delivered up to 1800/2500/3300/4110/4530lm Performance
 L90 B10=50,000h CRI
 2700K, 3000K, 3500K, 4000K
 CRI >80, CRI >90, CRI >98
 Dimming 0-10V, Phase-cut

Warm Dimming COB LED
 33W
 Lumens delivered up to 1520lm
 L70 B10=50,000h
 1700K-3000K
 CRI >95
 Dimming 0-10V, Phase-cut

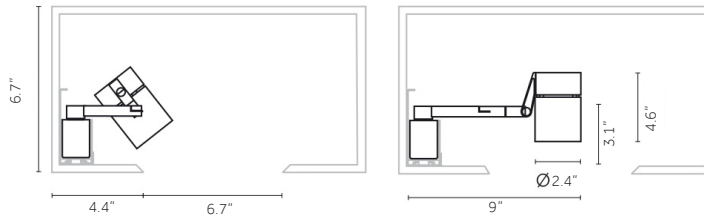Ø2.4"


9W,12W,17W
 Lumens delivered up to 1115/1455/1970lm Precision
 Lumens delivered up to 1200/1560/2110lm Performance
 L80 B10=50,000h
 2700K, 3000K, 3500K, 4000K
 CRI >80, CRI >90, CRI >98
 Dimming 0-10V, Phase-cut

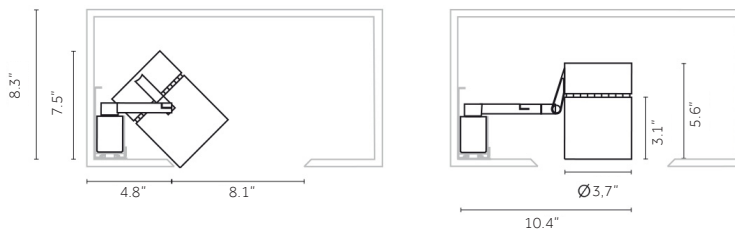Ø3.7"

12W,17W,24W,33W, 37W
 Lumen delivered up to 1690/2351/3170/4130/4477lm Precision
 Lumen delivered up to 1800/2500/3300/4110/4530lm Performance
 L90 B10=50,000h
 2700K, 3000K, 3500K, 4000K
 CRI >80, CRI >90, CRI >98
 Dimming 0-10V, Phase-cut


- Watt lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.


- For 3500K, must consult with factory to confirm availability

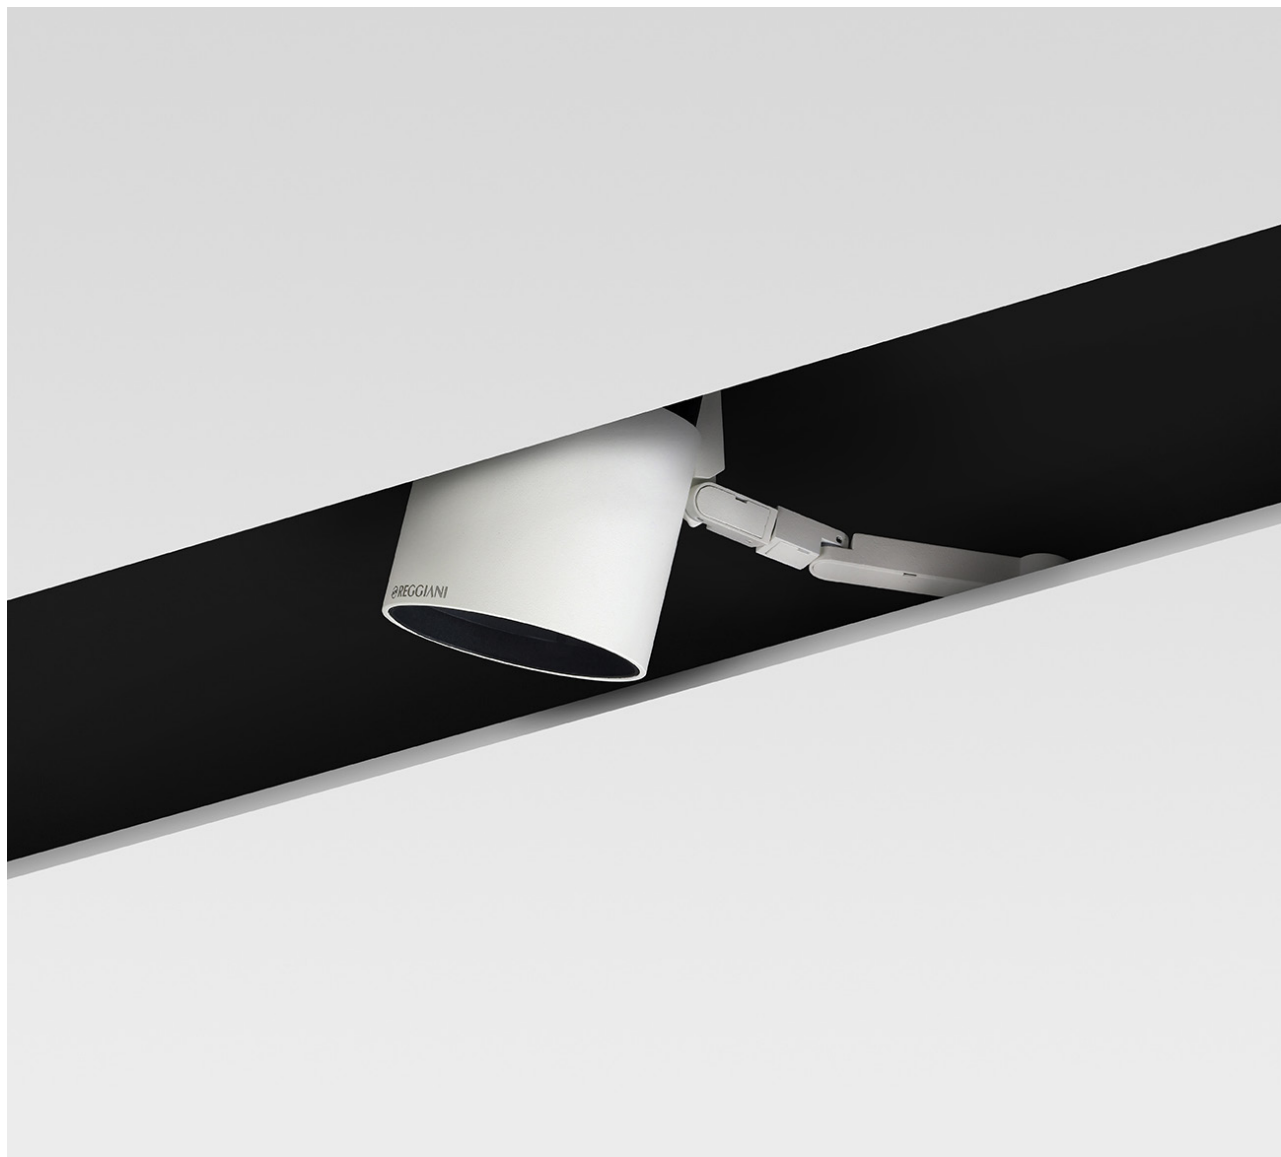

Yori Evo 48V


The Yori Evo family has evolved and widened, now including a 48V low-voltage track system available with adjustable spotlights, pendants, and linears in a range of different sizes. In presenting a product or a piece of art, light plays an essential role; Yori Evo 48V adds new dimensions, performance and unique flexibility to the offering. The outstanding CRI>98 option enhances colors, authenticity, and materiality, adding value to any sales item or art object and drawing viewers' attention to it.

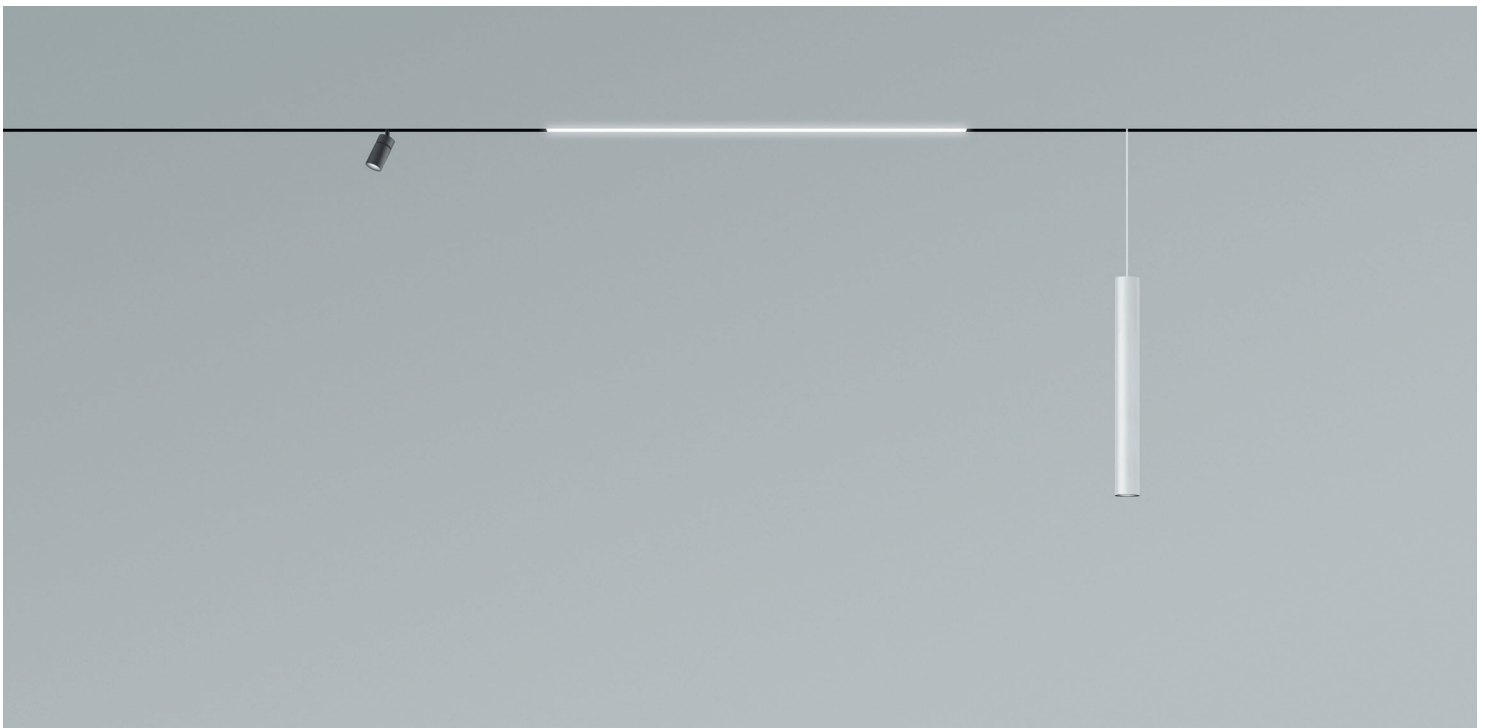

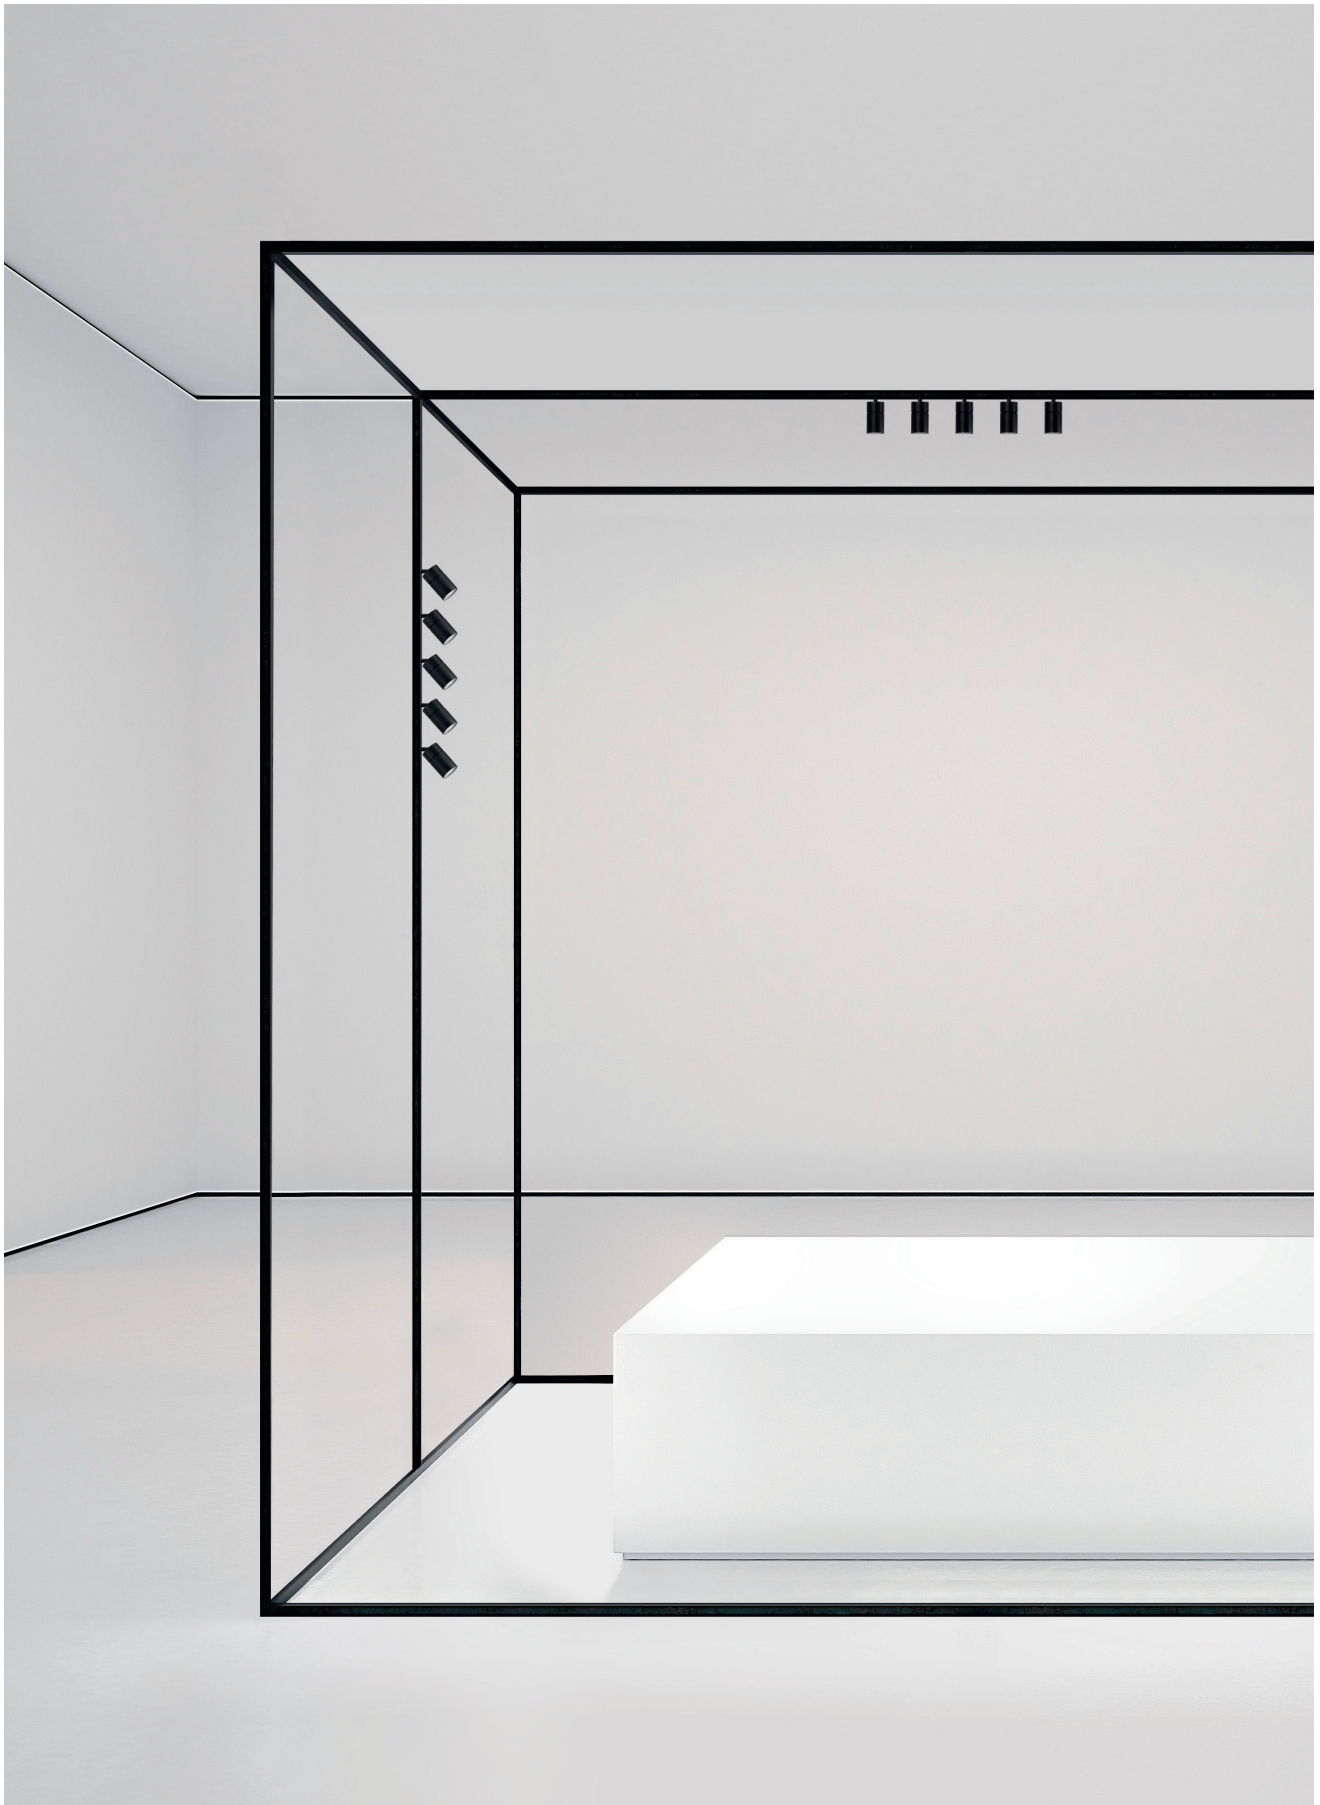

Yori Pendant 48V

Finishes:

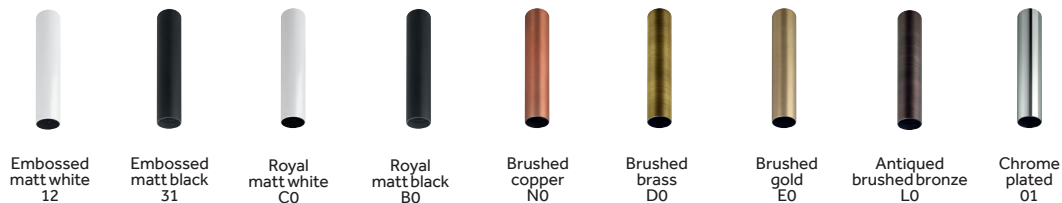

Optics:



1" dia x 16"L / 31.5"L / 63"L
 1.4" dia x 6"L / 16"L / 31.5"L
 2.4" dia x 10"L


	10°	28°	33°
	10°	22°	31°
8°	12°	20°	32°

Yori Pendant Mounting:




48" Cord

Accessories:

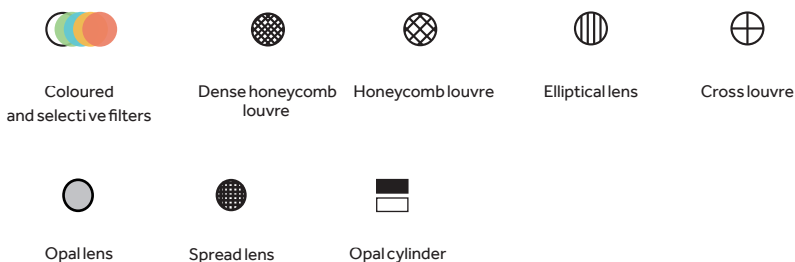


Technical Features:

Ø 1"

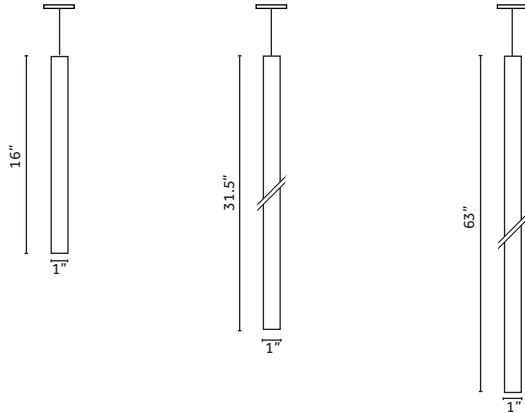

2W
 Lumen delivered up to 110lm
 L90 B10=50,000h
 2700K, 3000K, 3500K, 4000K
 CRI >80, CRI >90
 Dimming 0-10V, DALI, On/Off

Ø1.4"

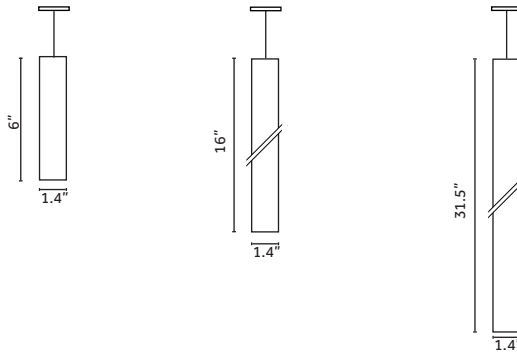

2.4W, 3.5W
 Lumen delivered up to 192lm
 L90 B10=50,000h
 2700K, 3000K, 3500K, 4000K
 CRI >80, CRI >90
 Dimming 0-10V, DALI, On/Off


Ø2.4"




9W
 Lumen delivered up to 1000lm
 L90 B10=50,000h
 2700K, 3000K, 3500K, 4000K
 CRI >80, CRI >90
 Dimming 0-10V, DALI, On/Off

Yori Evo 48V

Finishes:

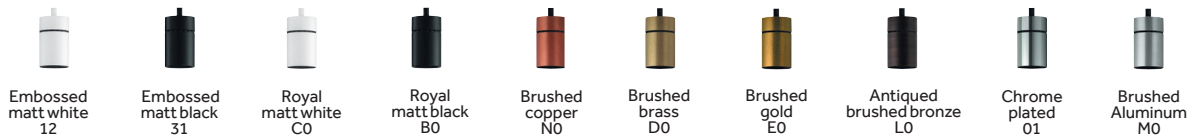


Product Sizes:

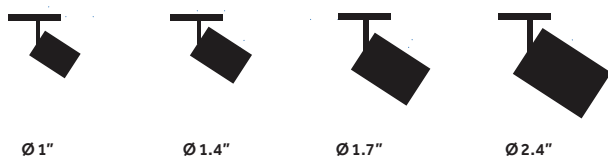

Optics:




Accessories:

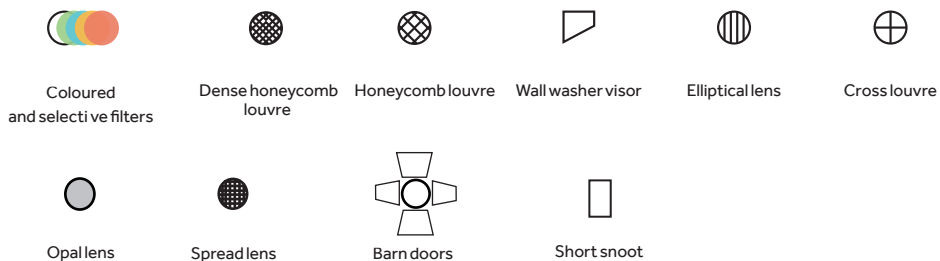


Technical Features:

Ø1"

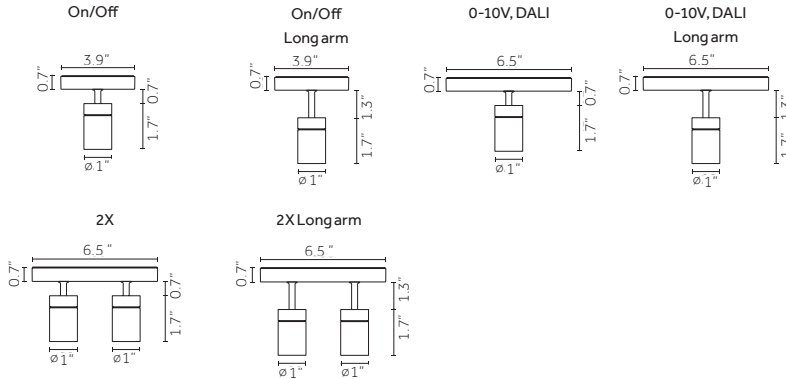


2W, 2Wx2
Lumen delivered up to 110lm / 210lm x 2
L90 B10=50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, DALI, On/Off

Ø1.4"

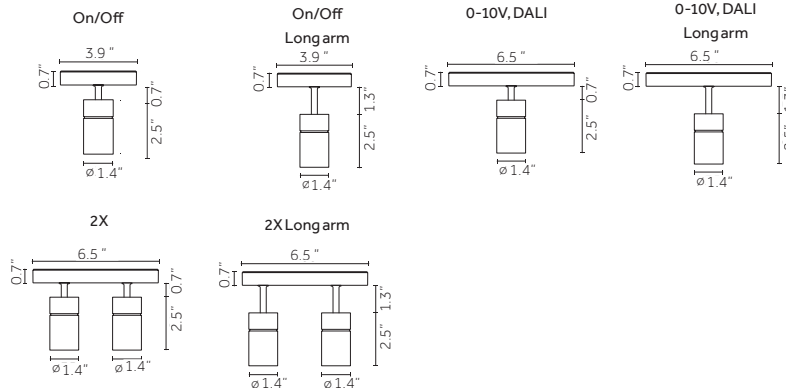


2.4W, 2.4Wx2
Lumen delivered up to 270lm / 270 x 2lm
L90 B10=50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, DALI, On/Off

Ø1.7"

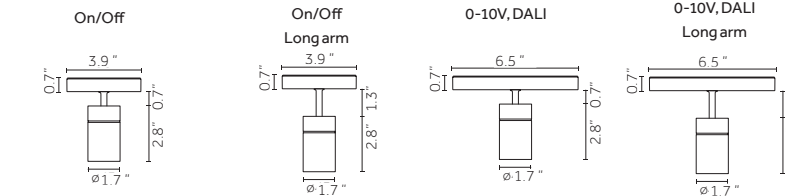

4W, 9W
Lumen delivered up to 435lm / 750lm Precision
Lumen delivered up to 450lm / 780lm Performance
L90 B10=50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90
Dimming 0-10V, DALI, On/Off

Ø2.4"

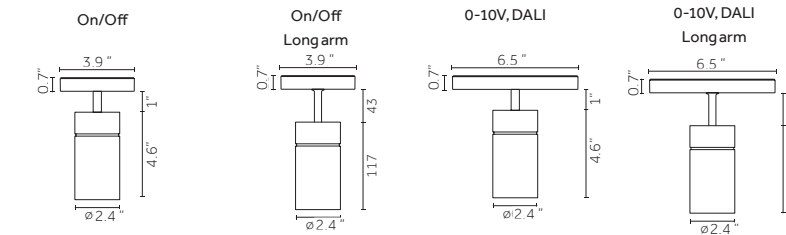


9W, 12W, 17W
Lumen delivered up to 1115lm / 1455lm / 1970lm Precision
Lumen delivered up to 1560lm / 2110lm Performance
L90 B10=50,000h
2700K, 3000K, 3500K, 4000K
CRI >80, CRI >90, CRI >98
Dimming 0-10V, DALI, On/Off

Yori Linear 48V

Finishes:



Embossed
matt white
12



Embossed
matt black
12

Product Sizes:



11.3"



22.3"



33.3"



44.4"



55.4"

Optical Options:



Opal




Prismatic




UGR 19 High Performance



Yori Linear 48V
Opal diffuser

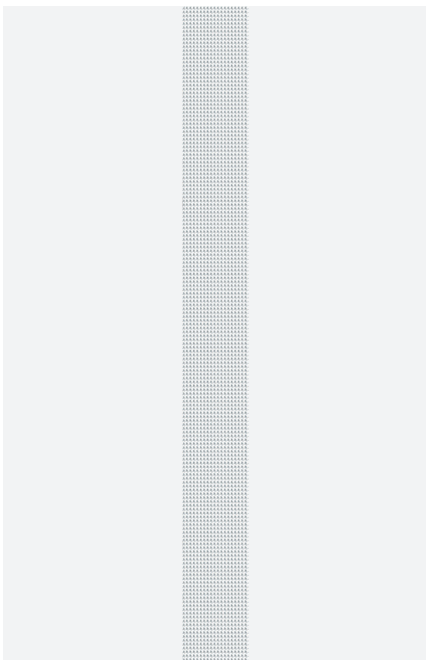

Yori Linear 48V
Prismatic diffuser






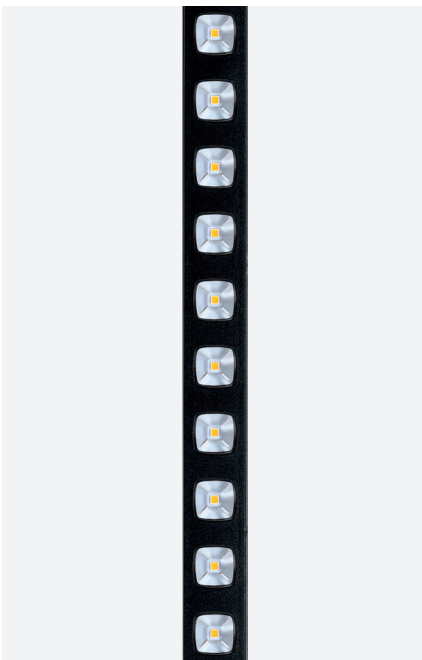


Yori Linear 48V
UGR <19

Yori Linear 48V - Opal diffuser	Yori Linear 48V - Prismatic diffuser	Yori Linear 48V - UGR<19
---------------------------------	--------------------------------------	--------------------------



High-Performance



Lengths: 5.4W/11.3", 10.8W/22.3", 16.2W/33.3", 21.6W/44.4", 27W/55.4"
Lumen delivered up to 525lm,1078lm,1615lm,2153lm, 2692lm
L90 B10=50,000h
2700K, 3000K, 3500K,4000K
CRI>90

Lengths: 5.4W/11.3", 10.8W/22.3", 16.2W/33.3", 21.6W/44.4", 27W/55.4"
Lumen delivered up to 368lm,755lm,1133lm,1509lm,1888lm
L90 B10=50,000h
2700K,3000K, 3500K, 4000K
CRI>90

Lengths: 4.3W/11.3", 8.6W/22.3", 12.9W/33.4", 15.4W/44.4"
Lumen delivered up to 546lm,1093lm,1640lm,1968lm
L90 B10=50,000h
2700K, 3000K, 3500K,4000K
CRI>90

High-Performance
lengths: 9.9W/11.3", 15W/11.3"
Lumen delivered up to 1081lm,1506 lm
L90 B10=50,000h
2700K, 3000K, 3500K,4000K
CRI>90

- Watt lumen data refer to nominal values of the LED source, for photometric data visit www.reggianiusa.com.
- For 3500K, must consult with factory to confirm availability

Worldwide contacts

USA

Reggiani Lighting USA, inc.
372 Starke Road
Carlstadt NJ 07072, USA
T. (+1) 201 372 1717
F. (+1) 201 372 1616
info@reggianiusa.com
www.reggianiusa.com

HEADQUARTERS

ITALY

Reggiani Spa Illuminazione
Viale Monza 16 P.O. Box 99
20845 Sovico (MB), Italy
T. (+39) 039 20711
F. (+39) 039 2071999
contact@reggiani.net

CHINA

Reggiani Ningbo ITG Lighting co. Ltd
Shenjia Village - Qiulai Town - Yinzhou
315010 Ningbo, China
T. (+86) 574 88418655 - 88412627
F. (+86) 574 88364186
info@itglight.com

UNITED KINGDOM

Reggiani Ltd
12 Chester Road
Borehamwood
Herts, WD6 1LT - UK
T. (+44) 0208 236 3000
F. (+44) 0208 236 3099
reggiani@reggiani.co.uk

RUSSIA

Showroom

Kalanchevskaya Street, 16,
Building 1, Room 4A, 129090 Moscow
T. (+7) 495 2690113 - 846 3320266
F. (+7) 495 2690112
russia@reggiani.net

FRANCE

Showroom

Showroom Bureau Projets
35 Bd. Richard Lenoir, Bastille
75011 Paris, France
T. (+33) 01 43382704
F. (+33) 01 43382720
france@reggiani.net

Worldwide distributors

For the worldwide distributors list visit
www.reggianiusa.com



