



Project:	
Type:	
Description:	

YORI MONOPOINT 3.0"

INDOOR - SURFACE



Yori 3.0" Monopoint (JBox Mounted)

Yori 3.0" Monopoint (Surface Mounted)

DAMP			IP20	
CUT OUT	Round: Ø 2.4"			
	5/8 in Max Ceiling Thickness			

Precision = Refractor Optics
Performance = Reflector Optics

LIGHT ENGINE

COB LED Very Narrow Optic

Example:

A	.	3	4	A	.		A.PM34A.WN31
Mounting		Optic Type	Watt	Beam Angle	CCT	17W	Finishes
<u>LQ JBox Mounted</u>		<u>3 Precision</u>	<u>4 17W</u>	<u>A 7° Very narrow</u>	<u>HC 3000K CRI >98 lm 1700</u>		<u>12 Embossed matt white</u>
<u>PM Surface Mounted</u>					<u>HW 2700K CRI >90 lm 1870</u>		<u>31 Embossed matt black</u>
					<u>HQ 3000K CRI >90 lm 1920</u>		
					<u>WW 3000K CRI >80 lm 2320</u>		
					<u>WN¹ 3500K CRI >80 lm 2360</u>		
					<u>NN 4000K CRI >80 lm 2400</u>		

NOTES

- For 3500K CCT, must consult with factory to confirm availability.
- For custom stem length, add .Bxx to the end of the ordering code, where xx is the custom stem length in inches, from 6" to 96" (.B06 to .B96)

All lumens shown above are initial.
Lumen delivered up to 1465 lm Precision
Lumen maintenance: L90 B10=50,000h

COB LED Standard Optics

Example:

A	.				.		A.LQ44HB.HW12
Mounting		Optic Type	Watt	Beam Angle	CCT	12W/17W/24W	Finishes
<u>LQ JBox Mounted</u>		<u>3 Precision</u>	<u>3 12W</u>	<u>B Precision 12°</u>	<u>HC 3000K CRI >98 lm 1323/1834/2476</u>		<u>12 Embossed matt white</u>
<u>LM Surface Mounted</u>		<u>4 Performance</u>	<u>4 17W</u>	<u>E Precision 23°</u>	<u>HW 2700K CRI >90 lm 1491/2067/2792</u>		<u>31 Embossed matt black</u>
			<u>6 24W</u>	<u>B Performance 12°</u>	<u>HQ 3000K CRI >90 lm 1533/2122/2860</u>		
				<u>E Performance 23°</u>	<u>WW 3000K CRI >80 lm 1859/2582/3487</u>		
				<u>F Performance 37°</u>	<u>WN¹ 3500K CRI >80 lm 1889/2623/3544</u>		
				<u>H Performance 48°</u>	<u>NN 4000K CRI >80 lm 1920/2665/3602</u>		

NOTES

- For 3500K CCT, must consult with factory to confirm availability.
- For custom stem length, add .Bxx to the end of the ordering code, where xx is the custom stem length in inches, from 6" to 96" (.B06 to .B96)

All lumens shown above are initial.
Lumen delivered up to 1575/2190/2955 lm Precision
Lumen delivered up to 1800/2399/3350 lm Performance
Lumen maintenance: L80 B10=50,000h

Warm Dimming COB LED

Example:

A	.	3	6	B	.DT		A.LQ36B.DT12
Mounting		Optic Type	Wattage	Optics	CCT	25W	Finishes
<u>LQ JBox mounted</u>		<u>3 Precision</u>	<u>6 25W</u>	<u>B Precision 25°</u>	<u>DT 1700-3000K CRI >95 lm 100-2500</u>		<u>12 Embossed matt white</u>
<u>LM Surface mounted</u>							<u>31 Embossed matt black</u>

NOTES

- For custom stem length, add .Bxx to the end of the ordering code, where xx is the custom stem length in inches, from 6" to 96" (.B06 to .B96)

All lumen shown above are initial
Lumen delivered up to 1100 lm
Lumen maintenance: L70 B50=50,000h

Project:	
Type:	
Description:	

YORI MONOPOINT 3.0" **INDOOR - SURFACE**

DRIVER

Example:

F **0000** **L.FML121.0000**

Dimming	Driver Location	Driver Code	Plate
<u>T Phase-Cut</u>	<u>F Remote Driver</u>	12W MH70 120V, Phase-cut, dims down to 1%, powers 1 fixture at a time	<u>0000 No Plate</u>
		17W MH62 120V, Phase-cut, dims down to 1%, powers 1 fixture at a time	
		24W & 25W DT MH60 120V, Phase-cut, dims down to 1%, powers 1 fixture at a time	
<u>V 0-10V</u>		12W MH73 120/277V, 0-10V, dims down to 1%, powers 1 fixture at a time	
		12W LD49 120/277V, 0-10V, dims down to 0.1%, powers 2 fixtures at a time	
		17W MH66 120/277V, 0-10V, dims down to 1%, powers 1 fixture at a time	
		17W LD50 120/277V, 0-10V, dims down to 0.1%, powers 2 fixtures at a time	
		24W & 25W DT MH64 120/277V, 0-10V, dims down to 1%, powers 1 fixture at a time	
		24W & 25W DT LD52 120/277V, 0-10V, dims down to 0.1%, powers 2 fixtures at a time	
<u>L Lutron EcoSystem</u>		12W ML121 120/277V, Lutron EcoSystem Soft-on, Fade-to-Black, dims down to 0.1%, powers 1 fixture at a time	
		17W ML136 120/277V, Lutron EcoSystem Soft-on, Fade-to-Black, dims down to 0.1%, powers 1 fixture at a time	
<u>O Non-Dimming</u>		12W MH06 120/277V, Non-Dimming, powers 1 fixture at a time	

NOTES
3. For emergency driver options, consult factory

Project:	
Type:	
Description:	

YORI MONOPOINT 3.0" INDOOR - SURFACE

Technical Info

Driver:

Remote driver.

Mounting:

PQ and LQ Option: Mounts to a standard Octagon JBox using a 5" canopy.

PM and LM Option: Mounts with screw in springs.

Optical features Light source features:

1 LED/3 step/50,000 hrs

Beam Angles:

Precision: 7°, 12°, 23°, (25° only for warm dim - DT option)

Performance: 12°, 23°, 37°, 48°

Physical features :

Material: Die-cast aluminum

Surfaces: Ceiling.

Weight: 2.0 lbs

Maximum Remote Driver Distance:

60 Ft , 18Ga

80 Ft , 16Ga

100 Ft , 14 Ga

Luminaire Description:

Fixture Features: The attractive Yori cylinder is die cast aluminum with powder coat finish. Quickly changes beam spreads through the use of Precision refractors or Performance reflectors and various accessories.

Fixture Benefits: Part of the Yori family of lights assures consistent design. 350° horizontal and 90° vertical aiming.

Max Fixture Total Wattage:

12W LED: 13.5W

17W LED: 19W

24W LED: 26W

25W LED: 28W

Accessories: Precision and Performance accessories available.

Warranty: 5 Year LED.


ETL listed, Union assembled

Reggiani reserves the right to change details at any time.

Rev 8/10/2021

Technical Drawings


LIGHT ENGINE

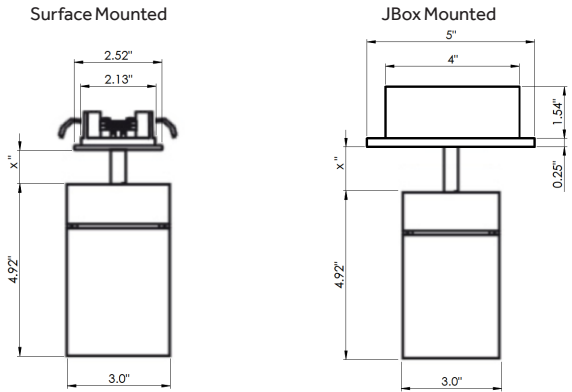

Note:
Standard X stem length is 1". For custom stem length, add .Bxx to the end of the ordering code, where xx is the custom stem length in inches, from 6" to 96" (.B06 to .B96)


DRIVER

Medium Remote Box



FOR USE WITH: MH70, MH62, MH60, MH73, MH66, MH64, ML121, ML136, and MH06

Large Remote Box



FOR USE WITH: LD49, LD50, and LD52

- 1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
- 2. Requires 3" clearance from any insulation

Project:	
Type:	
Description:	

YORI MONOPOINT 3.0"

INDOOR - SURFACE

ACCESSORIES PRECISION
























	Description: Precision - Narrow beam (12°-12W, 17W, 24W) (25°-for warm-dim only)	Code: 0.35130.0000	
	Description: Precision - Medium beam (23°-12W, 17W, 24W)	Code: 0.35131.0000	
	Description: Glass filter 1 mm	Code: 0.26404.00__	Finishes: 4A RED 5A GREEN 6A BLUE 7A PINK 8A YELLOW 9A ORANGE
	Description: Colored Gel Slides (2 pieces)	Code: 0.26412.0000	
	Description: Selective filter 3000K - 2700K	Code: 0.26561.0000	
	Description: Selective filter 2700K - 2500K	Code: 0.26420.0000	
	Description: Selective filter 2700K - 2200K	Code: 0.26428.0000	
	Description: Selective filter 2700K - 2000K	Code: 0.26436.0000	
	Description: Selective filter 3000K - 3600K	Code: 0.26569.0000	
	Description: Selective filter 3000K - 4000K	Code: 0.26577.0000	
	Description: Dense texture honeycomb louvre	Code: 0.26444.0000	
	Description: Wide texture honeycomb louvre	Code: 0.26452.0000	
	Description: Elliptical beam lens	Code: 0.26458.0000	
	Description: Opal lens	Code: 0.26464.0000	
	Description: Spread lens	Code: 0.26472.0000	
	Description: Cross blade louvre	Code: 0.26478.0000	
	Description: Barn doors	Code: 0.26486.0000	
	Description: Cone 45° wall washer	Code: 0.26490.00__	Finishes: 12 Embossed matt white 31 Embossed matt black

Project:	
Type:	
Description:	

YORI MONOPOINT 3.0"

INDOOR - SURFACE

ACCESSORIES PERFORMANCE

		Description: Performance - Narrow beam (12°- 12W,17W, 24W)	Code: 0.35150.0000	
		Description: Performance - Medium beam (23°- 12W,17W, 24W)	Code: 0.35151.0000	
		Description: Performance - Wide beam (48°- 12W,17W, 24W)	Code: 0.35152.0000	
		Description: Performance - Medium/Wide beam (37°- 12W,17W, 24W)	Code: 0.35153.0000	
		Description: Glass filter 1 mm	Code: 0.26405.00__	Finishes: 4A RED 5A GREEN 6A BLUE 7A PINK 8A YELLOW 9A ORANGE
		Description: Colored Gel Slides (2 pieces)	Code: 0.26413.0000	
		Description: Selective filter 3000K - 2700K	Code: 0.26562.0000	
		Description: Selective filter 2700K - 2500K	Code: 0.26421.0000	
		Description: Selective filter 2700K - 2200K	Code: 0.26429.0000	
		Description: Selective filter 2700K - 2000K	Code: 0.26437.0000	
		Description: Selective filter 3000K - 3600K	Code: 0.26570.0000	
		Description: Selective filter 3000K - 4000K	Code: 0.26578.0000	
		Description: Dense texture honeycomb louvre	Code: 0.26445.0000	
		Description: Wide texture honeycomb louvre	Code: 0.26453.0000	
		Description: Elliptical beam lens	Code: 0.26494.0000	
		Description: Opal lens	Code: 0.26465.0000	
		Description: Spread lens	Code: 0.26473.0000	
		Description: Cross blade louvre	Code: 0.26482.0000	
		Description: Cone 45° wall washer	Code: 0.26498.00__	Finishes: 12 Embossed matt white 31 Embossed matt black