



Project:	
Type:	
Description:	

## YORI 2LT. RECTANGULAR RECESSED 2.4"

INDOOR - RECESSED



Yori 2Lt Rectangular Trim



Yori 2 Lt Rectangular Trimless



Rectangle: 5.4 x 9.6in



1 1/4in Max Ceiling Thickness

Precision = Refractor Optics  
Performance = Reflector Optics

### LIGHT ENGINE

Example:

#### Power LED Very Narrow Optic

**A** .  **5** **2** **A** .  **A.1M52A.HW12**

##### Trim

**1M** Rectangular Trim  
**2M** Rectangular Trimless

##### Optic Type

**5** Precision

##### Wattage

**2** 9Wx2

##### Optics

**A** Precision 8°

##### CCT

9Wx2

**HW** 2700 K CRI >90 lm 725x2  
**HQ** 3000 K CRI >90 lm 730x2  
**WW** 3000 K CRI >80 lm 845x2  
**WN<sup>2</sup>** 3500 K CRI >80 lm 893x2  
**NN** 4000 K CRI >80 lm 940x2

##### Finishes

**12** Embossed matt white  
**31** Embossed matt black

##### NOTES

- For alternate ceiling thickness consult factory
- For 3500K, must consult with factory to confirm availability.

All lumens shown above are source.  
Lumen delivered up to 770x2 lm Precision  
Lumen maintenance: L90 B10=50,000h

#### COB LED Standard Optics

Example:

**A** .     .  **A.NM52E.HW12**

##### Trim

**NM** Rectangular Trim  
**PM** Rectangular Trimless

##### Optic Type

**5** Precision  
**6** Performance

##### Wattage

**2** 9Wx2  
**3** 12Wx2

##### Optics

**B** Precision 12°  
**E** Precision 20°  
**H** Precision 32°  
**B** Performance 13°  
**E** Performance 24°  
**H** Performance 40°

##### CCT

9Wx2 / 12Wx2

**HW** 2700 K CRI >90 lm 1050x2/1370x2  
**HQ** 3000 K CRI >90 lm 1100x2/1420x2  
**WW** 3000 K CRI >80 lm 1300x2/1700x2  
**WN<sup>2</sup>** 3500 K CRI >80 lm 1330x2/1738x2  
**NN** 4000 K CRI >80 lm 1360x2/1775x2  
**HC** 3000K CRI >98 lm 960x2/1252x2

##### Finishes

**12** Embossed matt white  
**31** Embossed matt black

##### NOTES

- For alternate ceiling thickness consult factory
- For 3500K, must consult with factory to confirm availability.

All lumens shown above are source.  
Lumen delivered up to 1115x2/1455x2 lm Precision  
Lumen delivered up to 1200x2/1560x2 lm Performance  
Lumen maintenance: L80 B10=50,000h

#### Warm Dimming COB LED

Example:

**A** .  **5** **3** **B** . **DT** **A.NM53B.DT12**

##### Trim

**NM** Rectangular Trim  
**PM** Rectangular Trimless

##### Optic Type

**5** Precision

##### Wattage

**3** 12Wx2

##### Optics

**B** Precision 27°

##### CCT

12Wx2

**DT** 1700-3000K CRI >95 lm 100-1000x2

##### Finishes

**12** Embossed matt white  
**31** Embossed matt black

##### NOTES

- For alternate ceiling thickness consult factory

All lumens shown above are source.  
Lumen delivered up to 690x2 lm Precision  
Lumen maintenance: L90 B10=50,000h





Project:	
Type:	
Description:	

## YORI 2LT. RECTANGULAR RECESSED 2.4"

INDOOR - RECESSED

### HOUSING/DRIVER (RETROFIT OPTION AVAILABLE, CONSULT FACTORY)

Example:

				<b>T.OMH71.136R</b>
Dimming	Housing/Driver Location	Driver Code	Plate	
<u>T</u> Phase-Cut	Open Housing with Remote/Semi-remote Driver	9Wx2 <b>MH71</b> 120V, Phase cut, dims to 1%, powers 1 fixture at a time	<u>. 136R</u> Rectangular Plate	
		12Wx2 <b>MH100</b> 120V, Phase cut, dims to 1%, powers 1 fixture at a time		
		9Wx2- A OPTIC ONLY <b>MH19</b> 120V, Phase cut, dims to 10%, powers 1 fixture at a time		
<u>V</u> 0-10V		9Wx2 <b>MD48</b> 120/277V, 0-10V, dims to 0.1%, powers 1 fixture at a time		
		12Wx2 <b>MD49</b> 120/277V, 0-10V, dims to 0.1%, powers 1 fixture at a time		
		9Wx2- A OPTIC ONLY <b>MD52</b> 120/277V, 0-10V, dims to 0.1%, powers 1 fixture at a time		
<u>L</u> Lutron EcoSystem		9Wx2 <b>ML112</b> 120/277V, Lutron EcoSystem Soft-on, fade to black, dims to 0.1%, powers 1 fixture at a time		
		12Wx2 <b>ML121</b> 120/277V, Lutron EcoSystem Soft-on, fade to black, dims to 0.1%, powers 1 fixture at a time		
		9Wx2- A OPTIC ONLY <b>ML156</b> 120/277V, Lutron EcoSystem Soft-on, fade to black, dims to 0.1%, powers 1 fixture at a time		

#### NOTES

3. For emergency driver options, consult factory

Project:	
Type:	
Description:	

## YORI 2LT. RECTANGULAR RECESSED 2.4"

INDOOR - RECESSED

### Technical Info

#### Housing/Driver:

Driver can be located fully remote or semi-remote adjacent to fixture in plenum and is provided with an open housing for mounting.

#### Optical/Light source features:

2 LED/3step/50,000 hrs

#### Beam angles:

Precision: 8°, 12°, 20°, (27° only for warm-dim DT option)

Performance: 13°, 24°, 40°

#### Physical features:

**Material:** Die-cast aluminum

**Mounting:** Recessed

**Surface:** Ceiling

**Weight:** 4.6 lbs

#### Max remote driver distance:

60 Ft, 18Ga

80 Ft, 16Ga

100 Ft, 14 Ga

#### Luminaire Description:

**Fixture Features:** Light engine can be completely hidden inside the ceiling plane and function as a down light, or may be pulled out below the ceiling plane and adjusted up to 90° vertically and 358° horizontally. The attractive Yori cylinder is die cast aluminum with powder coat finish. Quickly changes beam spreads through the use of Precision refractors or Performance reflectors and various accessories.

**Fixture Benefits:** Part of the Yori family of lights assures consistent design. Serves as a down light, wall wash, or accent light without compromise.

#### Max Fixture Total Wattage:

18W LED: 21W

24W LED: 27W

**Accessories:** Wide range of Precision and Performance accessories available ETL listed, Union assembled


**Max Ceiling Thickness:** 1.25 in

**Warranty:** 5 Year LED.


Reggiani reserves the right to change details at any time.

Rev 8/10/2021


### TECHNICAL DRAWINGS

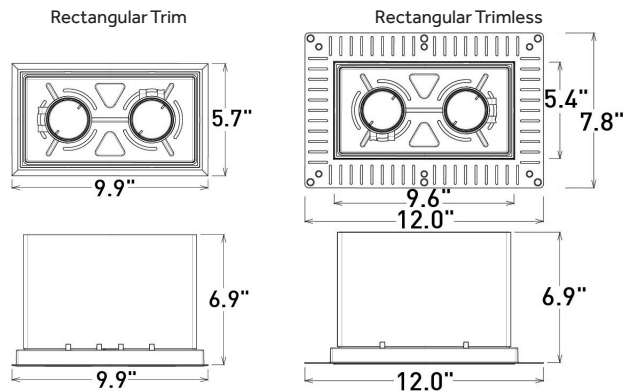

### HOUSING/DRIVER



Large Remote/  
Semi-Remote Box

























FOR USE WITH: MH19, MD52, MH71, MD48, MH100, MD49, ML156, ML112, and ML121 Drivers

1. Requires 1/2" clearance from building members, 3" clearance from any insulation
  2. Where no minimum install height indicated, minimum height is the trim height plus 1/2"
  3. Hanger bars install on all 4 sides, expand from 13.5" to 24"
  4. Hanger brackets accept FB bars, C-Channel, and 1/2" conduit for mounting
  5. Non electrical housings allow fixture positioning for post ceiling installation
1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
  2. Requires 3" clearance from any insulation

## YORI 2LT. RECTANGULAR RECESSED 2.4"

INDOOR - RECESSED

### ACCESSORIES PRECISION






















		<b>Description:</b> Precision - Narrow beam (12°-9W, 12W) (27°-For warm-dim only)	<b>Code:</b> <b>0.35125.0000</b>	
		<b>Description:</b> Precision - Medium beam (20°-9W, 12W)	<b>Code:</b> <b>0.35126.0000</b>	
		<b>Description:</b> Precision - Wide beam (32°-9W, 12W)	<b>Code:</b> <b>0.35127.0000</b>	
		<b>Description:</b> Glass filter 1 mm	<b>Code:</b> <b>0.26402.00__</b>	<b>Finishes:</b> <b>4A</b> RED <b>5A</b> Green <b>6A</b> Blue <b>7A</b> Pink <b>8A</b> Yellow <b>9A</b> orange
		<b>Description:</b> Colored Gel Slides (2 pieces)	<b>Code:</b> <b>0.26410.0000</b>	
		<b>Description:</b> Selective filter 3000K - 2700K	<b>Code:</b> <b>0.26559.0000</b>	
		<b>Description:</b> Selective filter 2700K - 2500K	<b>Code:</b> <b>0.26418.0000</b>	
		<b>Description:</b> Selective filter 2700K - 2200K	<b>Code:</b> <b>0.26426.0000</b>	
		<b>Description:</b> Selective filter 2700K - 2000K	<b>Code:</b> <b>0.26434.0000</b>	
		<b>Description:</b> Selective filter 3000K - 3600K	<b>Code:</b> <b>0.26567.0000</b>	
		<b>Description:</b> Selective filter 3000K - 4000K	<b>Code:</b> <b>0.26575.0000</b>	
		<b>Description:</b> Dense texture honeycomb louvre	<b>Code:</b> <b>0.26442.0000</b>	
		<b>Description:</b> Wide texture honeycomb louvre	<b>Code:</b> <b>0.26450.0000</b>	
		<b>Description:</b> Elliptical beam lens	<b>Code:</b> <b>0.26457.0000</b>	
		<b>Description:</b> Opal lens	<b>Code:</b> <b>0.26462.0000</b>	
		<b>Description:</b> Spread lens	<b>Code:</b> <b>0.26470.0000</b>	
		<b>Description:</b> Cross blade louvre	<b>Code:</b> <b>0.26477.0000</b>	
		<b>Description:</b> Barn doors	<b>Code:</b> <b>0.26485.0000</b>	
		<b>Description:</b> Cone 45° wall washer	<b>Code:</b> <b>0.26489.00__</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black

Project:	
Type:	
Description:	

## YORI 2LT. RECTANGULAR RECESSED 2.4"

INDOOR - RECESSED

### ACCESSORIES PERFORMANCE

		<b>Description:</b> Performance - Narrow beam (13°-9W, 12W)	<b>Code:</b> <b>0.35145.0000</b>	
		<b>Description:</b> Performance - Medium beam (24°-9W, 12W)	<b>Code:</b> <b>0.35146.0000</b>	
		<b>Description:</b> Performance - Wide beam (40°-9W, 12W)	<b>Code:</b> <b>0.35147.0000</b>	
		<b>Description:</b> Glass filter 1 mm	<b>Code:</b> <b>0.26403.00__</b>	<b>Finishes:</b> <b>4A</b> RED <b>5A</b> Green <b>6A</b> Blue <b>7A</b> Pink <b>8A</b> Yellow <b>9A</b> orange
		<b>Description:</b> Colored Gel Slides (2 pieces)	<b>Code:</b> <b>0.26411.0000</b>	
		<b>Description:</b> Selective filter 3000K - 2700K	<b>Code:</b> <b>0.26560.0000</b>	
		<b>Description:</b> Selective filter 2700K - 2500K	<b>Code:</b> <b>0.26419.0000</b>	
		<b>Description:</b> Selective filter 2700K - 2200K	<b>Code:</b> <b>0.26427.0000</b>	
		<b>Description:</b> Selective filter 2700K - 2000K	<b>Code:</b> <b>0.26435.0000</b>	
		<b>Description:</b> Selective filter 3000K - 3600K	<b>Code:</b> <b>0.26568.0000</b>	
		<b>Description:</b> Selective filter 3000K - 4000K	<b>Code:</b> <b>0.26576.0000</b>	
		<b>Description:</b> Dense texture honeycomb louvre	<b>Code:</b> <b>0.26443.0000</b>	
		<b>Description:</b> Wide texture honeycomb louvre	<b>Code:</b> <b>0.26451.0000</b>	
		<b>Description:</b> Elliptical beam lens	<b>Code:</b> <b>0.26493.0000</b>	
		<b>Description:</b> Opal lens	<b>Code:</b> <b>0.26463.0000</b>	
		<b>Description:</b> Spread lens	<b>Code:</b> <b>0.26471.0000</b>	
		<b>Description:</b> Cross blade louvre	<b>Code:</b> <b>0.26481.0000</b>	
		<b>Description:</b> Cone 45° wall washer	<b>Code:</b> <b>0.26497.00__</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black