


Project:	
Type:	
Description:	

YORI MONOPOINT 2.4" INDOOR - SURFACE

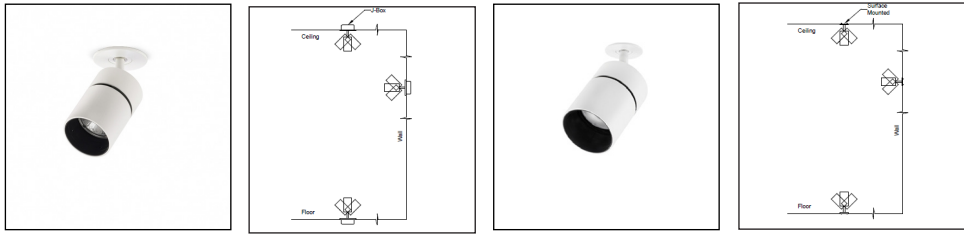

Yori 2.4" Monopoint (JBox mounted)

Yori 2.4" Monopoint (Surface Mounted)

DAMP			IP20	
CUT OUT	Round: Ø 2.4"			
	5/8 in Max Ceiling Thickness			
Precision = Refractor Optics Performance = Reflector Optics				

LIGHT ENGINE

Power LED Very narrow optic

Example:

A . **3** **2** **A** . **A.NQ32A.WW12**

Mounting	Optic Type	Wattage	Optics	CCT	Finishes
. <u>NQ</u> JBox mounted	<u>3</u> Precision	<u>2</u> 9W	<u>A</u> Precision 8°	9W	<u>12</u> Embossed Matt White
<u>NM</u> Surface mounted				<u>HW</u> 2700K CRI>90 lm 725	<u>31</u> Embossed Matt Black
				<u>HQ</u> 3000K CRI>90 lm 730	
				<u>WW</u> 3000K CRI>80 lm 844	
				<u>WN</u> 3500K CRI>80 lm 892	
				<u>NN</u> 4000K CRI>80 lm 940	

NOTES
 1. For 3500K CCT, must consult with factory to confirm availability.
 2. For custom stem length, add .Bxx to the end of the ordering code, where xx is the custom stem length in inches, from 6" to 96" (.B06 to .B96)

All lumens shown above are initial.
 Lumen delivered up to 770 lm Precision
 Lumen maintenance L90 B10 = 50,000h

COB LED Standard optics

Example:

A . . **A.GM43E.WW12**

Mounting	Optic Type	Wattage	Optics	CCT	Finishes
. <u>GQ</u> JBox mounted	<u>3</u> Precision	<u>2</u> 9W	<u>B</u> Precision 12°	9W/12W/17W	<u>12</u> Embossed Matt White
<u>GM</u> Surface mounted	<u>4</u> Performance	<u>3</u> 12W	<u>E</u> Precision 20°	<u>HQ</u> 3000K CRI>90 lm 1100/1420/2122	<u>31</u> Embossed Matt Black
		<u>4</u> 17W	<u>H</u> Precision 32°	<u>WW</u> 3000K CRI>80 lm 1300/1700/2582	
			<u>B</u> Performance 13°	<u>WN</u> 3500K CRI>80 lm 1330/1737/2623	
			<u>E</u> Performance 24°	<u>NN</u> 4000K CRI>80 lm 1360/1775/2665	
			<u>H</u> Performance 39°	<u>HC</u> 3000K CRI>98 lm 960/1252/1834	

NOTES
 1. For 3500K CCT, must consult with factory to confirm availability.
 2. For custom stem length, add .Bxx to the end of the ordering code, where xx is the custom stem length in inches, from 6" to 96" (.B06 to .B96)

All lumens shown above are initial.
 Lumen delivered up to 1115/1455/1970lm Precision
 Lumen delivered up to 1200/1560/2110lm Performance
 Lumen maintenance L80 B10 = 50,000h

Warm Dimming COB LED

Example:

A . **3** **3** **B** . **DT** **A.GQ33B.DT31**

Mounting	Optic Type	Wattage	Optics	CCT	Finishes
. <u>GQ</u> JBox mounted	<u>3</u> Precision	<u>3</u> 12W	<u>B</u> Precision 27°	12W	<u>12</u> Embossed matt white
<u>GM</u> Surface mounted			<u>DT</u> 1700-3000K CRI>95	lm 100-1000	<u>31</u> Embossed matt black

NOTES
 2. For custom stem length, add .Bxx to the end of the ordering code, where xx is the custom stem length in inches, from 6" to 96" (.B06 to .B96)

All lumen shown above are initial
 Lumen delivered up to 690 lm
 Lumen maintenance: L70 B50=50,000h

Project:	
Type:	
Description:	

YORI MONOPOINT 2.4" INDOOR - SURFACE

DRIVER Example:

F **.0000** **T.FMH71.0000**

Dimming	Driver Location	Driver Code	Plate
T Phase-Cut	F Remote Driver	9W POWER LED MH19 120V, Phase-cut, dims down to 10%, powers 1 fixture at a time	.0000 No Plate
		9W MH71 120V, Phase-cut, dims down to 1%, powers 1 fixture at a time	
		12W &12W DT MH70 120V, Phase-cut, dims down to 1%, powers 1 fixture at a time	
		17W MH62 120V, Phase-cut, dims down to 1%, powers 1 fixture at a time	
V 0-10V		9W POWER LED LZ32 120/277V, 0-10V, dims down to 1%, powers 1 fixture at a time	
		9W POWER LED LD52 120/277V, 0-10V, dims down to 0.1%, powers 2 fixtures at a time	
		9W MH74 120/277V, 0-10V, dims down to 1%, powers 1 fixture at a time	
		9W LD48 120/277V, 0-10V, dims down to 0.1%, powers 2 fixtures at a time	
		12W &12W DT MH73 120/277V, 0-10V, dims down to 1%, powers 1 fixture at a time	
		12W &12W DT LD49 120/277V, 0-10V, dims down to 0.1%, powers 2 fixtures at a time	
		17W MH66 120/277V, 0-10V, dims down to 1%, powers 1 fixture at a time	
		17W LD50 120/277V, 0-10V, dims down to 0.1%, powers 2 fixtures at a time	
L Lutron EcoSystem		9W POWER LED ML156 120/277V, Lutron EcoSystem Soft-on, Fade -to-Black, dims down to 0.1%, powers 1 fixture at a time	
		9W ML112 120/277V, Lutron EcoSystem Soft-on, Fade -to-Black, dims down to 0.1%, powers 1 fixture at a time	
		12W &12W DT ML121 120/277V, Lutron EcoSystem Soft-on, Fade -to-Black, dims down to 0.1%, powers 1 fixture at a time	
		17W ML136 120/277V, Lutron EcoSystem Soft-on, Fade -to-Black, dims down to 0.1%, powers 1 fixture at a time	
O Non-Dimming		12W MH06 120/277V, Non-Dimming, powers 1 fixture at a time	

NOTES
3. For emergency driver options, consult factory

Project:	
Type:	
Description:	

YORI MONOPOINT 2.4" INDOOR - SURFACE

Technical Info

Driver:

Remote driver.

Mounting:

NQ & GQ Option: Mounts to a standard Octagon box using a 5" canopy.

NM & GM Option: Mounts with screw in springs.

Optical features Light source features:

1 LED/3step/50,000 hrs

Beam Angles:

Precision: 8°, 12°, 20°, 32°, (27° only for warm-dim DT option)

Performance: 13°, 24°, 39°

Physical features:

Material: Die-cast aluminum

Surfaces: Ceiling

Weight: 1.3 lbs

Maximum Remote Driver Distance:

60 Ft, 18Ga

80 Ft, 16Ga

100 Ft, 14 Ga

Luminaire Description:

Fixture Features: The attractive Yori cylinder is die cast aluminum

with powder coat finish. Quickly changes beam spreads through

the use of Precision refractors or Performance reflectors and various accessories.

Fixture Benefits: Part of the Yori family of lights assures consistent design. 350° horizontal and 90° vertical aiming.

Max Fixture Total Wattage:

9W LED: 10W

12W LED: 13.5W

17W LED: 19W

Accessories: Precision and Performance accessories available.

Warranty: 5 Year LED.

ETL listed, Union assembled


Reggiani reserves the right to change details at any time without notice.

Rev 8/10/2021


Technical Drawings

LIGHT ENGINE

Surface Mounted



JBox Mounted

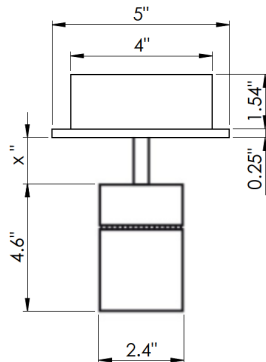


Note:

Standard X stem length is 1". For custom stem length, add .Bxx to the end of the ordering code, where xx is the custom stem length in inches, from 6" to 96" (.B06 to .B96)


DRIVER

Medium Remote Box



FOR USE WITH: MH19, MH71, MH70, MH62, MH74, MH73, MH66, ML156, ML112, ML121, ML136, and MH06

Large Remote Box



FOR USE WITH: LZ32, LD48, LD49, LD50, and LD52

1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation























1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation

Project:	
Type:	
Description:	

YORI MONOPOINT 2.4"

INDOOR - SURFACE

ACCESSORIES PRECISION



















		Description: Precision - Narrow beam (12°-9W, 12W, 17W) (27°-For warm-dim only)	Code: 0.35125.0000	
		Description: Precision - Medium beam (20°-9W, 12W, 17W)	Code: 0.35126.0000	
		Description: Precision - Wide beam (32°-9W, 12W, 17W)	Code: 0.35127.0000	
		Description: Glass filter 1 mm	Code: 0.26402.00__	Finishes: 4A RED 5A Green 6A Blue 7A Pink 8A Yellow 9A orange
		Description: Colored Gel Slides (2 pieces)	Code: 0.26410.0000	
		Description: Selective filter 3000K - 2700K	Code: 0.26559.0000	
		Description: Selective filter 2700K - 2500K	Code: 0.26418.0000	
		Description: Selective filter 2700K - 2200K	Code: 0.26426.0000	
		Description: Selective filter 2700K - 2000K	Code: 0.26434.0000	
		Description: Selective filter 3000K - 3600K	Code: 0.26567.0000	
		Description: Selective filter 3000K - 4000K	Code: 0.26575.0000	
		Description: Dense texture honeycomb louvre	Code: 0.26442.0000	
		Description: Wide texture honeycomb louvre	Code: 0.26450.0000	
		Description: Elliptical beam lens	Code: 0.26457.0000	
		Description: Opal lens	Code: 0.26462.0000	
		Description: Spread lens	Code: 0.26470.0000	
		Description: Cross blade louvre	Code: 0.26477.0000	
		Description: Barn doors	Code: 0.26485.0000	
		Description: Cone 45° wall washer	Code: 0.26489.00__	Finishes: 12 White 31 Black

Project:	
Type:	
Description:	

YORI MONOPOINT 2.4"

INDOOR - SURFACE

ACCESSORIES PERFORMANCE

	Description: Performance - Narrow beam (13°-9W, 12W, 17W)	Code: 0.35145.0000	
	Description: Performance - Medium beam (24°-9W, 12W, 17W)	Code: 0.35146.0000	
	Description: Performance - Wide beam (39°-9W, 12W, 17W)	Code: 0.35147.0000	
	Description: Glass filter 1 mm	Code: 0.26403.00__	Finishes: 4A RED 5A Green 6A Blue 7A Pink 8A Yellow 9A orange
	Description: Colored Gel Slides (2 pieces)	Code: 0.26411.0000	
	Description: Selective filter 3000K - 2700K	Code: 0.26560.0000	
	Description: Selective filter 2700K - 2500K	Code: 0.26419.0000	
	Description: Selective filter 2700K - 2200K	Code: 0.26427.0000	
	Description: Selective filter 2700K - 2000K	Code: 0.26435.0000	
	Description: Selective filter 3000K - 3600K	Code: 0.26568.0000	
	Description: Selective filter 3000K - 4000K	Code: 0.26576.0000	
	Description: Dense texture honeycomb louvre	Code: 0.26443.0000	
	Description: Wide texture honeycomb louvre	Code: 0.26451.0000	
	Description: Elliptical beam lens	Code: 0.26493.0000	
	Description: Opal lens	Code: 0.26463.0000	
	Description: Spread lens	Code: 0.26471.0000	
	Description: Cross blade louvre	Code: 0.26481.0000	
	Description: Cone 45° wall washer	Code: 0.26497.00__	Finishes: 12 White 31 Black