

Project:	
Туре:	
Description:	


INDOOR - SURFACE

DAMP

5

᠓



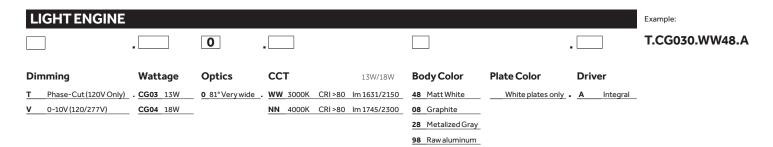

All lumens shown above are initial. Lumens delivered up to 845/1098 lm Lumen maintenance: L70 B50=50,000h

FINISHES





Project:	
Туре:	
Description:	

CELLS SURFACE INDOOR - OPAL DIFFUSER

INDOOR - SURFACE

Technical Info

Driver Integral driver. Optical features Light source features: LED/3 step/50,000 hrs Beam Angles: 81° Physical features : Material: Die-cast aluminum Mounting: Surface. Can also be mounted onto a junction box. Consult factory if

pendant mounting is required; fixture can be provided with standard 3/8 IP thread upon request. Surfaces: Celing, wall

Weight: 4.6 lbs

Luminaire Description:

Fixture Features: 16 LED square for surface mount with knockouts on all 4 sides. Supplied with 81° reflector and opal diffuser. Carries IK10 impact rating for vandal resistance. Fixture Benefits: Opal diffuser provides soft and uniform illumination. Max Fixture Total Wattage: 13W LED: 16W 18W LED: 21W Accessories: Please see page 3.


Accessories: Please see page 3. Warranty: 5 Year LED

ETL listed, Union assembled

Reggiani reserves the right to change details at any time. Rev 8/5/2021

TECHNICAL DRAWINGS

Cells Surface





Project:	
Туре:	
Description:	

CELLS SURFACE INDOOR - OPAL DIFFUSER

INDOOR - SURFACE

ACCESSORIES

4	1.6* 2.5*	${\rm Old}_{\rm L}^{2,*}$	Description: Connector	Code: 0.26030.00	Finishes: 48 White 08 Graphite 28 Gray 98 Raw aluminum
-	"F8	0° - 90°	Description: 90° adjustable bracket	Code: 0.26111.00	Finishes: 48 White 08 Graphite 28 Gray 98 Raw aluminum
	0° - 90° - [8] [9] [9] [9] [9] [9] [9] [9] [9] [9] [9	0° - 90°	Description: 90° two axis adjustable bracket	Code: 0.26112.00	Finishes: 48 White 08 Graphite 28 Gray 98 Raw aluminum
	$\mathbf{e}_{\mathrm{H}}^{\mathrm{e}_{\mathrm{H}}^{\mathrm{I}},5^{\mathrm{e}}}$	<u>16.3</u> "	Description: Visor	Code: 0.26110.00	Finishes: 48 White 08 Graphite 28 Gray 98 Raw aluminum