

Project:	
Type:	
Description:	

CELLS SURFACE OUTDOOR - TRANSPARENT DIFFUSER **OUTDOOR - SURFACE**



Cells Transparent Diffuser



LIGHT ENGINE

Example:

T.BG03B.WWQ0.W

Dimming	Wattage	Optics	CCT	13W/18W	Body Color	Plate Color	Driver/Wet Application
T Phase-Cut (120V Only)	BG03 13W	B 9° Narrow	WW 3000K CRI >80 Im 1631/2150		Q Matt White	0 White	W Wet rated with Integral driver
V 0-10V (120/277V)	BG04 18W	E 24° Medium	NN 4000K CRI >80 Im 1745/2300		R Graphite	1 Chrome	
		M 55° Wide			S Metalized Gray	2 Gray	
		O 68° Very wide			V Raw aluminum	4 Yellow	
		U Rectangular				5 Red	
		S Asymmetric				6 Blue	
		T Double asymmetric				7 Green	
						8 Graphite	

All lumens shown above are initial.
 Lumens delivered up to 1335/1728 Im
 Lumen maintenance: L70 B50=50,000h

FINISHES

Plates




^{EN} White
^{IT} Bianco

^{EN} Chrome
^{IT} Cromato

^{EN} Grey
^{IT} Grigio

^{EN} Graphite
^{IT} Grafite

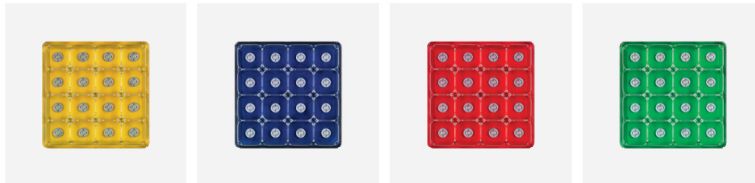

^{EN} Yellow
^{IT} Giallo

^{EN} Blue
^{IT} Blu

^{EN} Red
^{IT} Rosso

^{EN} Green
^{IT} Verde

Surface body



^{EN} White
^{IT} Bianco

^{EN} Graphite
^{IT} Grafite

^{EN} Grey
^{IT} Grigio

^{EN} Raw aluminium
^{IT} Alluminio grezzo

Project:	
Type:	
Description:	

CELLS SURFACE OUTDOOR - TRANSPARENT DIFFUSER

OUTDOOR - SURFACE

Technical Info

Driver

Integral driver.

Optical features Light source features:

LED/3 step/50,000 hrs

Beam Angles: 9°, 24°, 55°, 68°, Rectangular, Asymmetric, Double asymmetric

Physical features:

Material: Die-cast aluminum

Mounting: Surface. Can also be mounted onto a junction box. Consult factory if pendant mounting is required; fixture can be provided with standard 3/8 IP thread upon request.

Surfaces: Ceiling, wall

Weight: 4.6 lbs

Luminaire Description:

Fixture Features: 16 LED square for surface mount with knockouts on all 4 sides. Choice of 8 reflector options. Carries IP66 and wet rating for exterior use and IK10 impact rating for vandal resistance.

Fixture Benefits: Range of optics and colorful plates allow for a fully customizable solution to meet a range of project needs.

Max Fixture Total Wattage:

13W LED: 16W

18W LED: 21W

Accessories: Please see page 3.

Warranty: 5 Year LED


ETL listed, Union assembled

Reggiani reserves the right to change details at any time.


Rev 8/5/2021

TECHNICAL DRAWINGS


Cells Surface

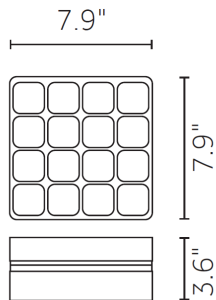


EXAMPLES




EN Optics: asymmetric, rectangular or very wide, or diffuser: opal
IT Ottica: Asimmetrico, Rettangolare o molto largo, o Diffuser: Opale




EN Optics: narrow, medium or wide.
IT Ottica: Stretto, Medio o Largo.




EN Optics: Asymmetric
IT Ottica: Asimmetrico.



EN Optics: Double asymmetric.
IT Ottica: Doppio asimmetrico.



EN Optics: Asymmetric.
IT Ottica: Asimmetrico.



EN Optics: Asymmetric.
IT Ottica: Asimmetrico.

Project:	
Type:	
Description:	

CELLS SURFACE OUTDOOR - TRANSPARENT DIFFUSER

OUTDOOR - SURFACE

ACCESSORIES

	<p>Description: Connector</p>	<p>Code: 0.26030.00__</p>	<p>Finishes: 48 White 08 Graphite 28 Gray 98 Raw aluminum</p>
	<p>Description: 90° adjustable bracket</p>	<p>Code: 0.26111.00__</p>	<p>Finishes: 48 White 08 Graphite 28 Gray 98 Raw aluminum</p>
	<p>Description: 90° two axis adjustable bracket</p>	<p>Code: 0.26112.00__</p>	<p>Finishes: 48 White 08 Graphite 28 Gray 98 Raw aluminum</p>
	<p>Description: Visor</p>	<p>Code: 0.26110.00__</p>	<p>Finishes: 48 White 08 Graphite 28 Gray 98 Raw aluminum</p>