


Project:	
Type:	
Description:	

## YORI PENDANT 48V 1.4" INDOOR - TRACK

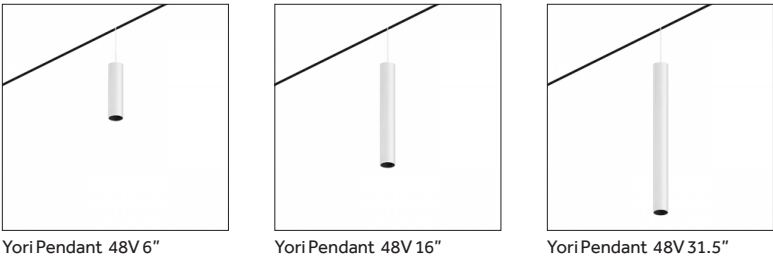


## LIGHT ENGINE

### Power LED Standard optics - 2.4W

Example:

**V.UN60E.HQC0.31.48**



<b>Dimming</b>	<b>Watt/Length</b>	<b>Optics</b>	<b>CCT</b>	<b>Pendant Finishes</b>	<b>Track Adapter</b>	<b>Track</b>
V 0-10V	TN60 2.4W/6" long UN60 2.4W/16" long VN60 2.4W/31.5" long	B 10° Narrow E 22° Medium H 31° Wide	2.4W HW 2700K CRI>90 Im 210 HQ 3000K CRI>90 Im 220 WW 3000K CRI>80 Im 265 WN <sup>2</sup> 3500K CRI>80 Im 278 NN 4000K CRI>80 Im 290	12 Embossed Matt White 31 Embossed Matt Black CO <sup>1</sup> Royal Matt White BO <sup>1</sup> Royal Matt Black DO <sup>1</sup> Brushed Brass EO <sup>1</sup> Brushed Gold O1 <sup>1</sup> Chrome Plated MO <sup>1</sup> Brushed Aluminum LO <sup>1</sup> Brushed Antique Bronze NO <sup>1</sup> Brushed Copper	12 White 31 Black	48 48V Track

NOTES  
 1. Consult factory for lead time and pricing  
 2. For 3500K CCT, must consult with factory to confirm availability  
 3. 48" cord length standard and can be shortened in field. Consult factory for longer length.

All lumen above are initial.  
 lumen maintainance L90 B10=50,000h.

### Power LED Standard optics - 3.5W

Example:

**0.UN61E.HQC0.31.48**



<b>Dimming</b>	<b>Watt/Length</b>	<b>Optics</b>	<b>CCT</b>	<b>Pendant Finishes</b>	<b>Track Adapter</b>	<b>Track</b>
D DALI 0 On/Off	TN61 3.5W/6" long UN61 3.5W/16" long VN61 3.5W/31.5" long	B 10° Narrow E 22° Medium H 31° Wide	3.5W HW 2700K CRI>90 Im 310 HQ 3000K CRI>90 Im 315 WW 3000K CRI>80 Im 380 WN <sup>2</sup> 3500K CRI>80 Im 397 NN 4000K CRI>80 Im 415	12 Embossed Matt White 31 Embossed Matt Black CO <sup>1</sup> Royal Matt White BO <sup>1</sup> Royal Matt Black DO <sup>1</sup> Brushed Brass EO <sup>1</sup> Brushed Gold O1 <sup>1</sup> Chrome Plated MO <sup>1</sup> Brushed Aluminum LO <sup>1</sup> Brushed Antique Bronze NO <sup>1</sup> Brushed Copper	12 White 31 Black	48 48V Track


NOTES  
 1. Consult factory for lead time and pricing  
 2. For 3500K CCT, must consult with factory to confirm availability  
 3. 48" cord length standard and can be shortened in field. Consult factory for longer length.

All lumen above are initial.  
 lumen maintainance L90 B10=50,000h.

Project:	
Type:	
Description:	

## YORI PENDANT 48V 1.4" INDOOR - TRACK

### 48V TRACK

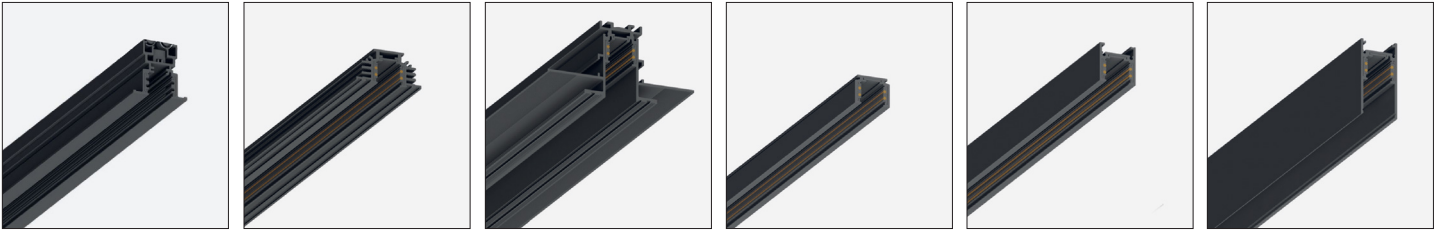

48V Recessed Trim    48V Recessed Trimless    48V High Recessed Trimless    48V Surface Slim    48V Surface/Pendant    48V High Surface/Pendant

### 48V - TRACK DOWNLIGHT ONLY

Example:

**A.50428.0012.LVXXXX**

**A.504**            **.LV**    **XXXX**

Track	Type	Finishes	Low Voltage	Length
<b>A.504</b> 48V	<b>28</b> High Surface	<b>0012</b> White	<b>.LV</b> Low Voltage	<b>XXXX</b> Exact length (in Inches)
	<b>29*</b> High Pendant	<b>0031</b> Black		
	<b>32</b> Recessed Trimless			
	<b>35</b> High Recessed Trimless			
	<b>39</b> Surface			
	<b>40*</b> Pendant			
	<b>43*</b> Recessed Trim			
	<b>45*</b> Surface Slim			

NOTES  
 4. For pendant versions, must specify cable or rigid stem pendant accessories on last page.  
 8. Longer lead time consult factory

### 48V - TRACK DOWNLIGHT AND UPLIGHT

Example:

**V.5373C.HW12.48XXXX**

   **.537**        **C**            **.48**    **XXXX**

Dimming	Track	Type/Uplight Circuit	Uplight	CCT	4.2 W/LF	Finishes	Low Voltage	Length
<b>V</b> 0-10V	<b>.537</b> 48V Uplight	<b>3</b> Pendant, Single Circuit for Down/Up	<b>C*</b> Continuous	<b>HW</b> 2700K CRI>90	Im 548/LF	<b>12</b> White	<b>.48</b> 48V	<b>XXXX</b> Exact length (in Inches)
<b>D</b> DALI		<b>4</b> Pendant, Separate Circuits for Down/Up		<b>HQ</b> 3000K CRI>90	Im 663/LF	<b>31</b> Black		
<b>0</b> On/Off		<b>7</b> High Pendant, Single Circuit for Down/Up		<b>WQ*</b> 3500K CRI>90	Im 690/LF			
		<b>8</b> High Pendant, Separate Circuits for Down/Up		<b>HN</b> 4000K CRI>90	Im 717/LF			

NOTES  
 2. For 3500K CCT, must consult with factory to confirm availability  
 5. Standard linear LED uplight runs continuously in track. Consult factory for optional 2' linear uplight installed in segments spaced in 1' increments on center.

### DRIVER

Example:

**0.FHM57.0000.48**

Control	Driver Location	Driver Code	Plate	Low Voltage
<b>0</b> On/Off*	<b>F</b> Remote Driver	120/277V; On/Off driver to power track and LED uplight	<b>.0000</b> No Plate	<b>.48</b> 48V
		60W <b>MM54</b>		
		120/277V; On/Off driver to power track and LED uplight		
		96W <b>HM57</b>		
		120/277V; On/Off driver to power track and LED uplight		
		320W <b>WM61</b>		

NOTES  
 6. Remote drivers to power track and uplight are on/off. All dimming drivers are located on-board track heads and uplights. For higher power drivers, consult factory for available options.  
 7. Total quantity of remote drivers is based on load requirements to be determined by track row and run lengths and quantity of track heads and uplights.

Project:	
Type:	
Description:	

## YORI PENDANT 48V 1.4" INDOOR - TRACK

### Technical Info

**Driver:**

Remote driver is required to power the 48V track.

**Optical features Light source features:**

1 LED/3step/50,000 hrs

**Beam angles:**

10°, 22°, 31°

**Physical features:**

**Material:** Die-cast aluminum

**Mounting:** Track

**Weight:** 6" version: 1.2 lbs; 16" version: 1.9 lbs; 31.5" version: 2.6 lbs

**Cable Length:** 48" Standard

**Max Remote Driver Distance:**

60 Ft, 18 Ga

80 Ft, 16 Ga

100 Ft, 14 Ga

**Luminaire Description:**

**Fixture Features:** 48V low-voltage Yori Evo track system allows for minimal track profiles and clean aesthetic with no driver box on the pendant head.

**Fixture Benefits:** Part of the Yori family of lights assures consistent design.

**Track:** 48V recessed, surface, pendant.

**Track Accessories:** Please see following pages.

**Accessories:** Solid and hollow cylinder dropped lens accessories.


**ETL listed, Union assembled**

Reggiani reserves the right to change details at any time.


Rev 1/06/2021

## TECHNICAL DRAWINGS


On/Off Pendant 6"




0-10V/DALI Pendant 6"




On/Off Pendant 16"




0-10V/DALI Pendant 16"

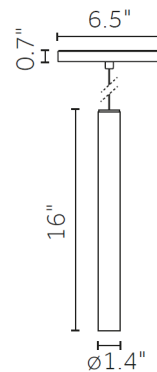

On/Off Pendant 31.5"



0-10V/DALI Pendant 31.5"

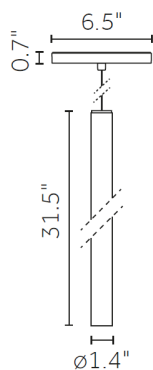


Project:	
Type:	
Description:	

## YORI PENDANT 48V 1.4"


INDOOR - TRACK

### 48V TRACK


48V Recessed Trim




48V Recessed Trimless




48V High Recessed Trimless




48V Surface Slim



48V Surface/Pendant




48V High Surface/Pendant



### DRIVER


Medium Remote Box



FOR USE WITH: MM54 60W Driver

1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation


Slim Remote Box



FOR USE WITH: HM57 96W Driver

1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation

Extra Large Remote Box



FOR USE WITH: WM61 320W Driver















1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation

Project:	
Type:	
Description:	

## YORI PENDANT 48V 1.4"

INDOOR - TRACK

### ACCESSORIES


	<b>Description:</b> Cylinder, solid version (Ø 1.4", h 1.4")	<b>Code:</b> <b>0.26042.0000</b>	
	<b>Description:</b> Cylinder, solid version (Ø 1.4", h 2.8")	<b>Code:</b> <b>0.26043.0000</b>	
	<b>Description:</b> Cylinder, hollow version (Ø 1.4", h 1.4")	<b>Code:</b> <b>0.26044.0000</b>	
	<b>Description:</b> Cylinder, hollow version (Ø 1.4", h 2.8")	<b>Code:</b> <b>0.26045.0000</b>	
	<b>Description:</b> Glass filter 1 mm	<b>Code:</b> <b>0.26710.00__</b>	<b>Finishes:</b> <b>4A</b> RED <b>5A</b> Green <b>6A</b> Blue <b>7A</b> Pink <b>8A</b> Yellow <b>9A</b> orange
	<b>Description:</b> Selective filter 3000K - 2700K	<b>Code:</b> <b>0.26711.0000</b>	
	<b>Description:</b> Selective filter 2700K - 2500K	<b>Code:</b> <b>0.26712.0000</b>	
	<b>Description:</b> Selective filter 2700K - 2200K	<b>Code:</b> <b>0.26713.0000</b>	
	<b>Description:</b> Selective filter 2700K - 2000K	<b>Code:</b> <b>0.26714.0000</b>	
	<b>Description:</b> Selective filter 3000K - 3600K	<b>Code:</b> <b>0.267150000</b>	
	<b>Description:</b> Selective filter 3000K - 4000K	<b>Code:</b> <b>0.26716.0000</b>	
	<b>Description:</b> Elliptical beam lens	<b>Code:</b> <b>0.26717.0000</b>	
	<b>Description:</b> Opal lens	<b>Code:</b> <b>0.26718.0000</b>	
	<b>Description:</b> Diffusive lens	<b>Code:</b> <b>0.26719.0000</b>	

Project:	
Type:	
Description:	

## YORI PENDANT 48V 1.4"

INDOOR - TRACK

### 48V TRACK ACCESSORIES

CONNECTOR ACCESSORIES			
	<b>Description:</b> L-Connector for Recessed Trim	<b>Code:</b> <b>0.02414.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for Recessed Trimless	<b>Code:</b> <b>0.02474.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for High Recessed Trimless	<b>Code:</b> <b>0.02478.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for Surface/Pendant	<b>Code:</b> <b>0.02449.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> L-Connector for High Surface/Pendant	<b>Code:</b> <b>0.02448.00__LV</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
PENDANT ACCESSORIES			
	<b>Description:</b> 9' Long Cable Suspension Set, With Power, End of Row (Quantity provided will be based on row/run information)	<b>Code:</b> <b>A.LVEP1.00__C118</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> 9' Long Cable Suspension Set, Non-Power, End of Row (Quantity provided will be based on row/run information)	<b>Code:</b> <b>A.LVEN1.00__C118</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black
	<b>Description:</b> 9' Long Cable Suspension Set, With Power, Middle of Row (Quantity provided will be based on row/run information)	<b>Code:</b> <b>A.LVMP1.00__C118</b>	<b>Finishes:</b> <b>12</b> White <b>31</b> Black

Project:	
Type:	
Description:	

## YORI PENDANT 48V 1.4"

INDOOR - TRACK

### 48V TRACK ACCESSORIES

PENDANT ACCESSORIES			
	<p><b>Description:</b> 9' Long Cable Suspension Set, Non-Power, Middle of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVMN1.00__C118</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, With Power, End of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVEP2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, Non-Power, End of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVEN2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, With Power, Middle of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVMP2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>
	<p><b>Description:</b> 4' Long Rigid Stem Suspension Set, Non-Power, Middle of Row (Quantity provided will be based on row/run information)</p>	<p><b>Code:</b> <b>A.LVMN2.00__S048</b></p>	<p><b>Finishes:</b> <b>12</b> White <b>31</b> Black</p>