

Project:	
Type:	
Description:	

YORI SURFACE 1" INDOOR - SURFACE



Yori Surface 6" Yori Surface 31.5" Yori Surface 63"



LIGHT ENGINE

Example:

A.BH50B.HW12

Watt/Length	Optics	CCT	Finishes
BH50 2W/6" long	B 9° Narrow	HW 2700K CRI >90 140lm	12 Embossed matt white
CH50 2W/31.5" long	E 24° Medium	HQ 3000K CRI >90 145 lm	31 Embossed matt black
DH50 2W/63" long	H 32° Wide	WW 3000K CRI >80 190 lm	CO ¹ Royal matt white
		WN ² 3500K CRI >80 195lm	BO ¹ Royal matt black
		NN 4000K CRI >80 200 lm	NO ¹ Brushed copper
			DO ¹ Brushed brass
			EO ¹ Brushed gold
			O1 ¹ Chrome
			MO ¹ Brushed aluminum
			LO ¹ Antiqued brushed bronze

NOTES

1. Consult factory for lead time and pricing
2. For 3500K, must consult with factory to confirm availability
3. White canopy is provided for all finishes above except for 31 and B0, unless black is requested at the time of order. Black canopy is provided for 31 and B0

All lumen above are initial
Lumens maintenance L90 B10=50,000h
Lumens delivered up to 110lm

DRIVER

Example:

T.FSH19.0000

Dimming	Driver Location	Driver Code	Plate
T Phase-Cut	F Remote Driver	2W SH19 120V; Phase-cut, dims down to 1%, powers 3-5 fixtures in series	0000 No plate
V 0-10V		2W LD22 120/277V; 0-10V, dims down to 1%, powers 1-5 fixtures in series	

NOTES

4. For emergency driver options, consult factory

Project:	
Type:	
Description:	

YORI SURFACE 1" INDOOR - SURFACE

Technical Info

Driver:

Remote driver.

Mounting: Surface. Mounts to standard octagon box using a canopy (ø5", 0.25" thick).

Optical features Light source features:

1 LED/3 step/50,000hrs

Beam Angles: 9°, 24°, 32°

Physical features :

Material; Die-cast aluminum

Weight: 6" version: .22 lbs; 31.5" version: 1.3 lbs; 63" version: 2.6 lbs

Max Remote Driver Distance

60 Ft, 18Ga

80 Ft, 16Ga

100 Ft, 14 Ga

Luminaire Description:

Fixture Features: LED and optics reside inside the cylinder concealing the light source.

Fixture Benefits: Part of the Yori family of recessed, track, surface, pendant, and wall. Allows design consistency.

Max Fixture Total Wattage: 3W

Accessories: Solid cylinder dropped lens accessories.




Warranty: 5 Year LED.

ETL listed, Union assembled

Reggiani reserves the right to change details at any time.

Rev 8/10/2021

TECHNICAL DRAWINGS

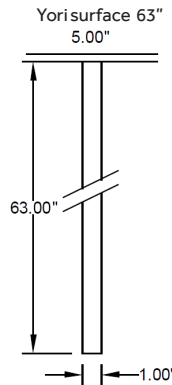

DRIVER


Small Remote Box



FOR USE WITH: SH19 Driver

1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation

Large Remote Box





FOR USE WITH: LD22 Driver

1. Must be installed in an accessible serviceable location with maximum 90 degrees Fahrenheit temperature.
2. Requires 3" clearance from any insulation

Project:	
Type:	
Description:	

YORI SURFACE 1" **INDOOR - SURFACE**

ACCESSORIES

	<p>Description Cylinder, solid version (Ø 1", h 0.8")</p>	<p>Code 0.26040.0000</p>
	<p>Description Cylinder, solid version (Ø 1", h 3.1")</p>	<p>Code 0.26041.0000</p>